


NOTES

1. NO LOAD POWER LOSS: 5.4 kW
2. MEASUREMENTS TAKEN WITH DC/DC CONVERTER OPERATING, NO DC SOURCE CONNECTED.
3. MEASUREMENTS TAKEN WITH RESISTIVE LOAD. MEASUREMENTS MAY VARY FOR CAPACITIVE (LEADING) LOADS AND INDUCTIVE (LAGGING) LOADS.

EXL S1 800kVA DYNAMIC ONLINE (VI) MODE AC/AC EFFICIENCIES

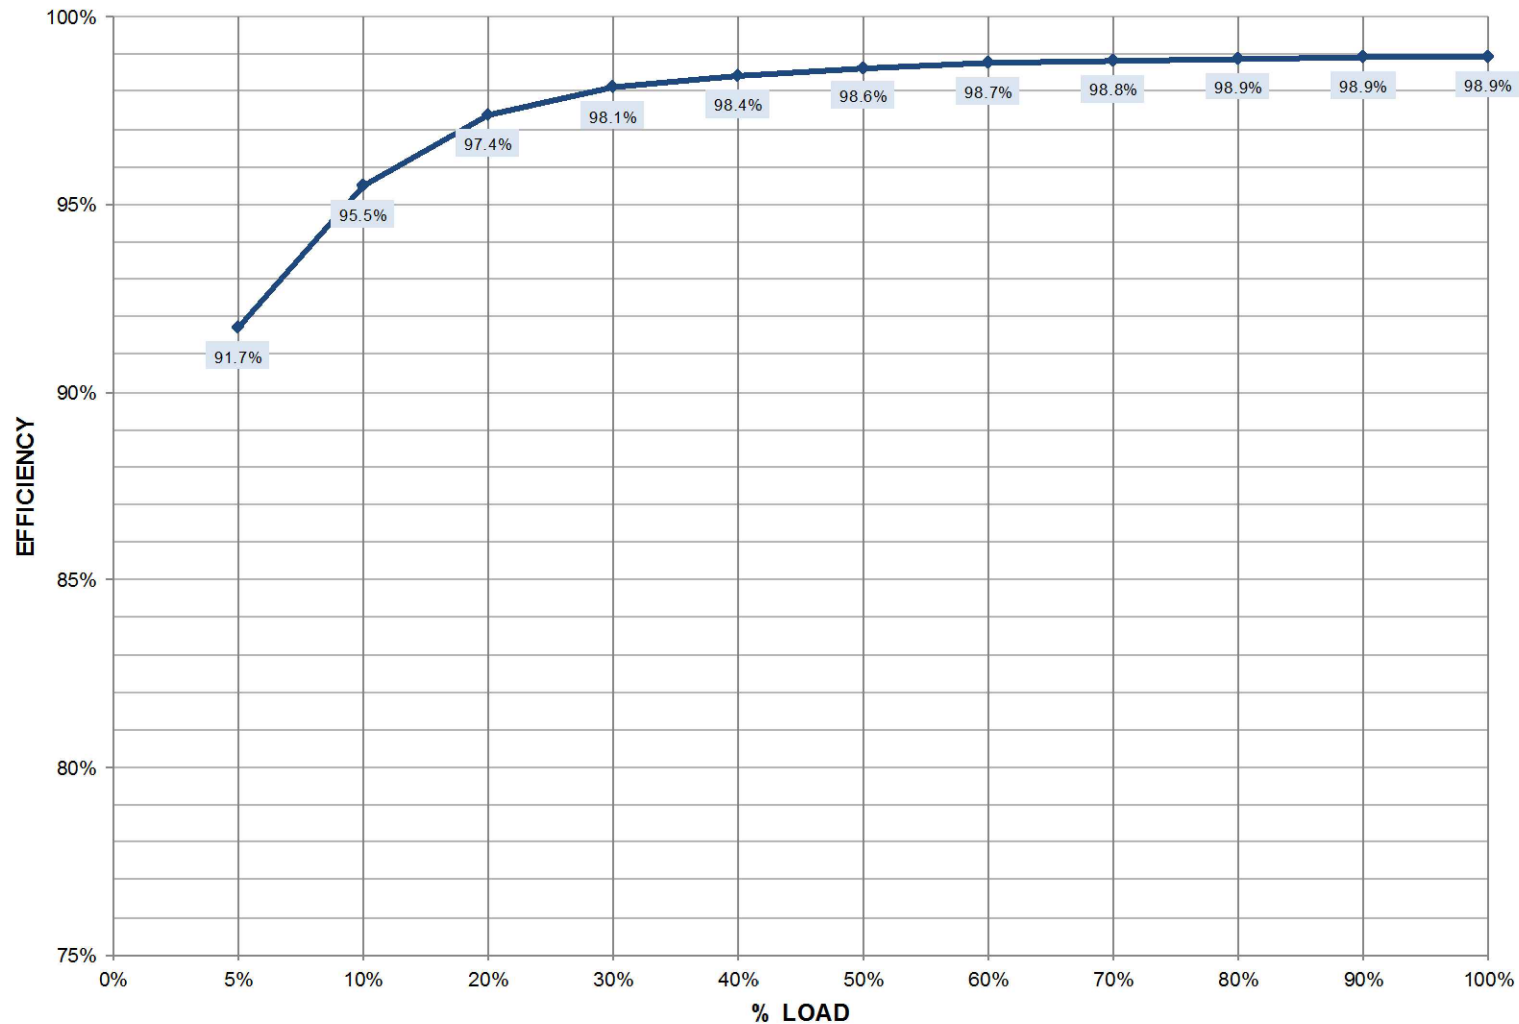

SHEET NO.	DRAWN BY:
1 OF 1	J. SHIPMAN
ECN NO.	DESIGNED BY:
	S. MAJOR
REF DWG.	APPROVED BY:
	S. MAJOR

MODULE DYNAMIC ONLINE (VI) MODE AC/AC EFFICIENCY
TYPICAL, SMS AND 1+N 800kVA/800kW
480V 60Hz
LIEBERT EXL S1

DWG. NO.	ES1-18-S058
DATE (LATEST REV.)	01/07/2018
REVISION	0
	1050 DEARBORN DR P.O. BOX 29186 COLUMBUS, OH 43229

