



Vertiv™ 360AI

Solution Design Specifications

Model Number: 5L500E



Table of Contents

1. Executive summary	3	7. Product Specification	12
2. General Technical Description	3	7.1 Vertiv™ VR3357 Rack	12
2.1 System capacity	3	7.2 Vertiv™ CoolChip CDU 600 Coolant Distribution Unit	13
2.2 Technologies used	3	7.3 Vertiv™ CoolChip Fluid Network	14
3. Material List	4	7.4 Vertiv™ Liebert® LT460 Zone Leak Detection Sensors	15
4. Solution Pictures	5	7.5 Vertiv™ PowerIT rPDU VP7UA0A0	16
4.1 Front quarter view	5	7.6 Vertiv™ Liebert® RDU501	17
4.2 Back quarter view	5		
4.3 Top view	6		
4.4 Front view	6		
4.5 Rear view	7		
4.6 Side view	7		
4.7 Vertiv™ Rack ISO view	7		
5. Technical Description	8		
5.1 Single line diagram	8		
5.2 Monitoring diagram	9		
5.3 Piping diagram	10		
6. Technical Specifications	11		
6.1 Product weight	11		
6.2 Maximum static load capacity of rack	11		
6.3 Operation & storage conditions	11		

1. Executive summary

Vertiv™ 360AI Solutions uniquely combine deep domain expertise in power architectures, thermal management, IT systems, and remote management, to enable rapid deployment of infrastructure for AI applications and high-performance computing.

Your goals for high-density, floorspace optimization, sustainability and efficiency became our teams' key design criteria. We focused our efforts on designing solutions that will exceed your goals and expectations with seamlessly integration into your white space. Our engineering team delivered world class solutions on this promise, and our services team can fully support it on request with their unmatched expertise and global footprint.

2. General technical description

This high-density solution is sized for IT load of 500 kW across 5 racks, assuming 400 kW of direct-to-chip liquid cooling capacity and 100 kW traditional air-cooling (i.e., 80:20 liquid and air split).

For the direct-to-chip circuit, the cooling capacity (400 kW) of the Vertiv™ CoolChip CDU 600 liquid-to-liquid standalone Coolant Distribution Unit (CDU) – has been calculated assuming the temperature of the chilled water in the primary fluid network is 23°C (73.4°F) with 7°C (12.6°F) delta T, and 100% water. Outlet water temperature in the secondary fluid network has been specified at 26°C (78.8°F) and 1.5 lpm/kW or 0.3962 GPM/kW, with 25% propylene glycol, equating to a return water temperature of 36°C (96.8°F) or 10°C (18°F) delta T.

Included products are server racks that house rack PDUs, manifolds, and top-of-rack management appliance, as well as other accessories necessary for integration and normal data center operation. Note: overhead manifold for secondary fluid network is not included by default.

The solution requires comprehensive deployment services for installation, fluid-fill, recurring a warranty service such as warranty inspection, start-up, and acceptance testing which are not included in the present scope of work. Optional services, available on demand, include workforce training on thermal management operation and servicing.

2.1 System capacity

05 Rack(s)

500 kW Total solution capacity

100 kW Load per rack

2.2 Technologies used

Cooling Method	Direct-to-chip (liquid)
----------------	-------------------------

Heat Rejection Type	Water/Glycol
---------------------	--------------

3. Material list

Qty.	SKU	Description
5	VR3357	Rack: Vertiv VR3357, 48U 800 mm x 1200 mm
1	XDU600	Liquid-to-Liquid CDU: Vertiv™ CoolChip CDU 600 Coolant Distribution Unit
5	RM124	Rack Manifold: Vertiv CoolChip Fluid Network manifold assembly in-rack 36U medium flow
5	LT460-Z20	Zone Leak Detection Sensors: Vertiv Liebert LT460 Leak Detection Kit, 6 m (20') cable
10	VP7UA0A0	Rack PDU: Vertiv Power IT, Switched Outlet Level Monitoring, 80 A, 240/415 V WYE, 57.6 kW, Vertical, (36) Combi C13/C19, Hardwired
1	RDU501	Monitoring Unit: Vertiv Liebert RDU501 Intelligent Infrastructure Management Appliance, 1U

Material list only includes major components, other supporting peripheral components such as the hoses, valves, cable, adapter kits, etc. would be part of final quote document.

4. Solution pictures

4.1 Front quarter view




4.2 Back quarter view




HD Reference Design 5L500E

The images shown are for representation and may not be an exact representation of the product.

4.3 Top view

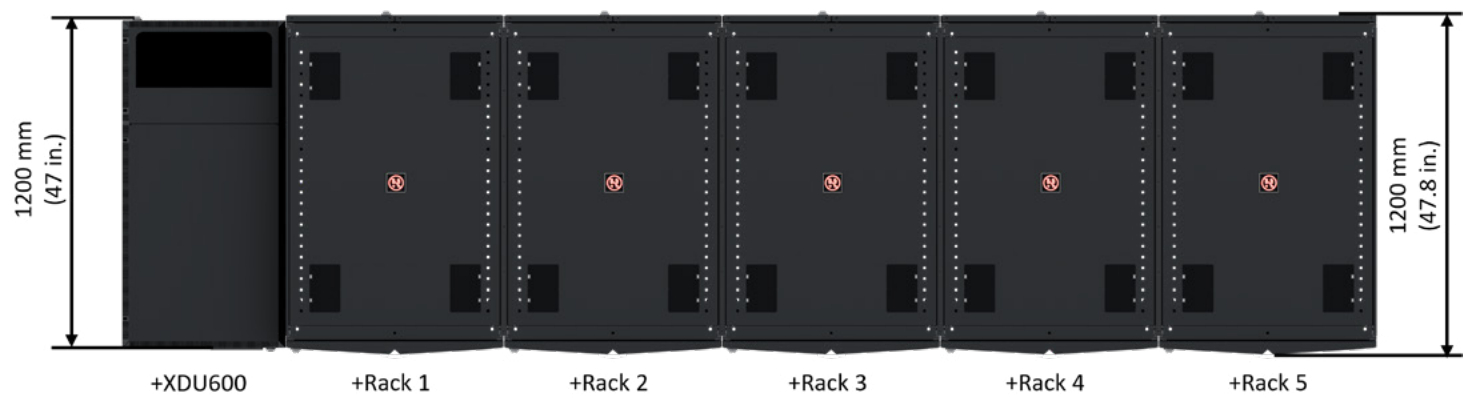


4.4 Front view

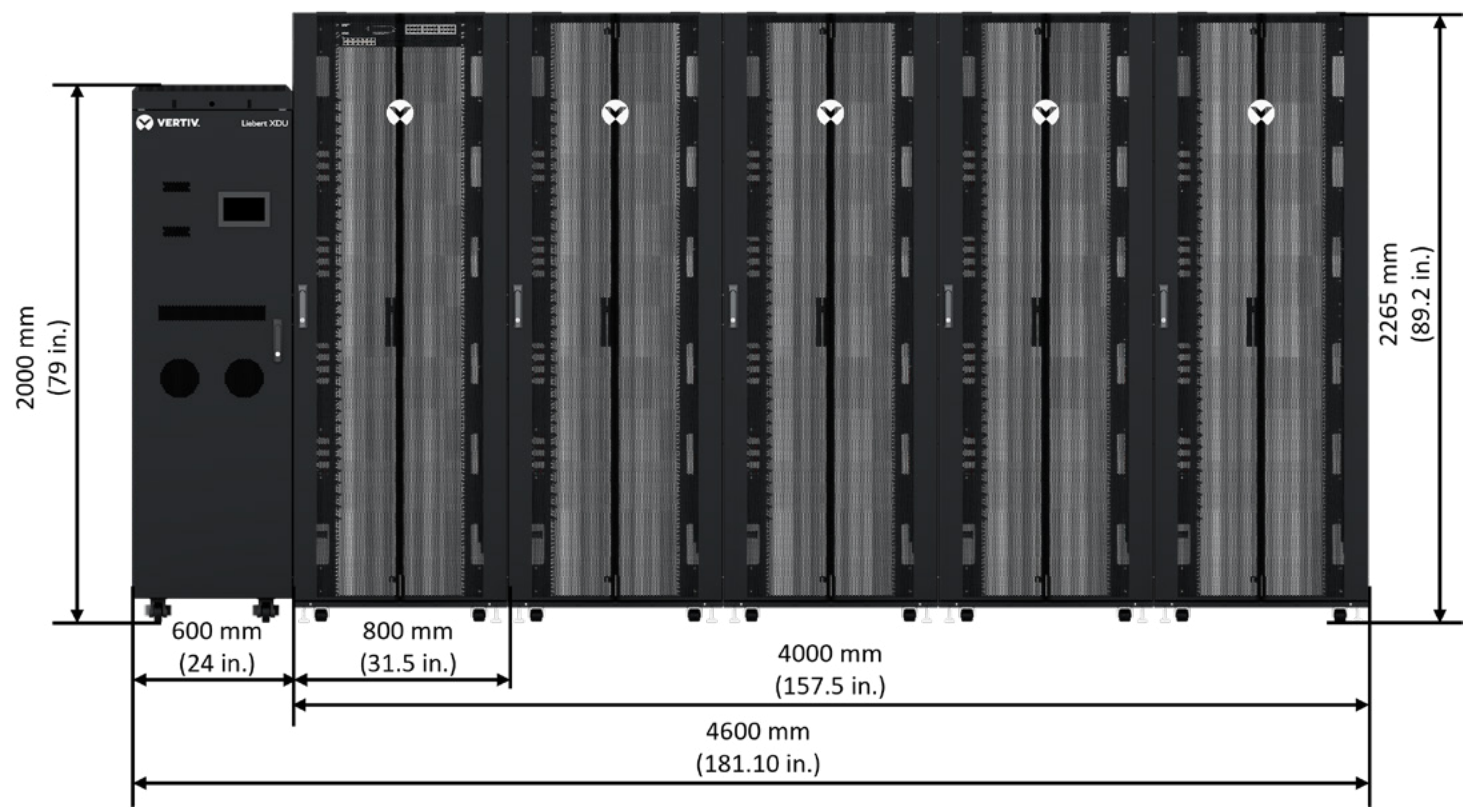

HD Reference Design 5L500E

The images shown are for representation and may not be an exact representation of the product.


4.5 Rear view

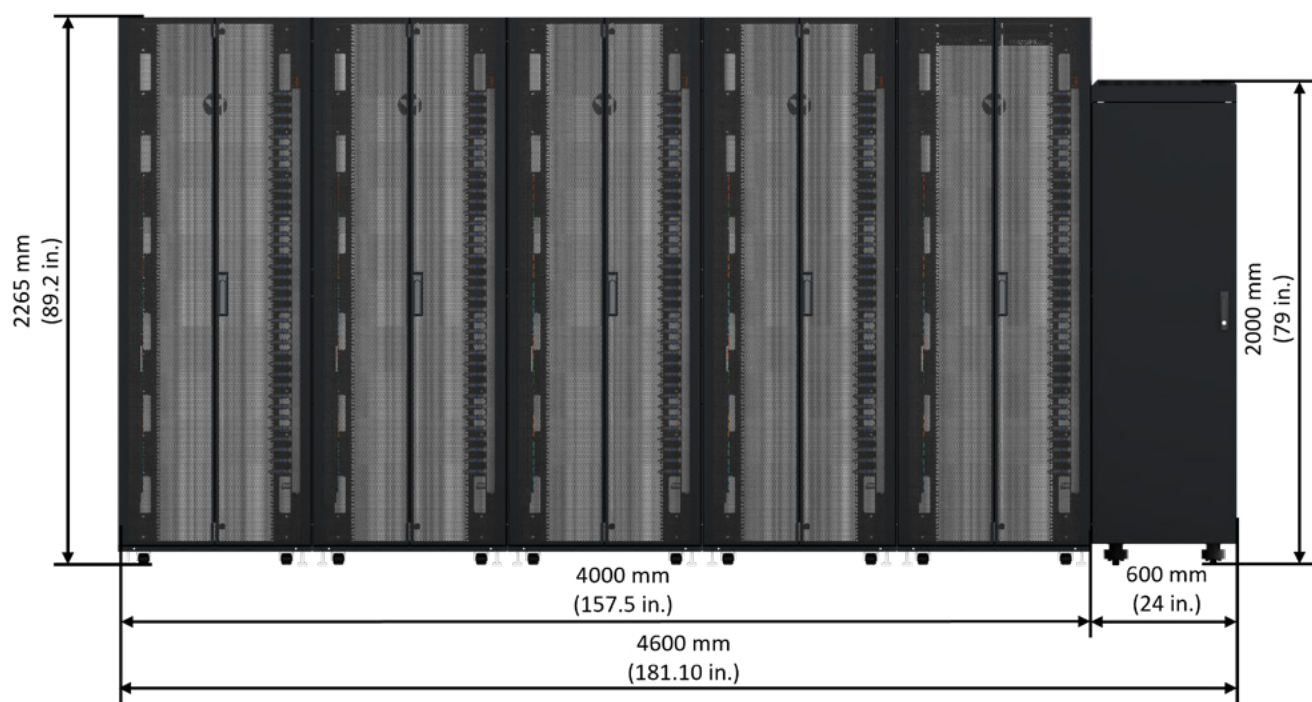

4.6 Side view



4.7 Vertiv™ Rack ISO view

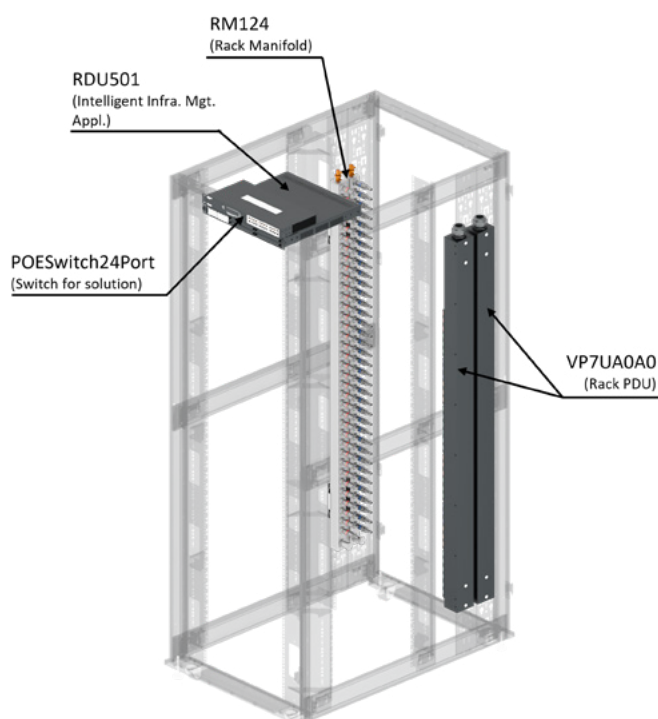


HD Reference Design 5L500E


The images shown are for representation and may not be an exact representation of the product.


5. Technical description

5.1 Single line diagram

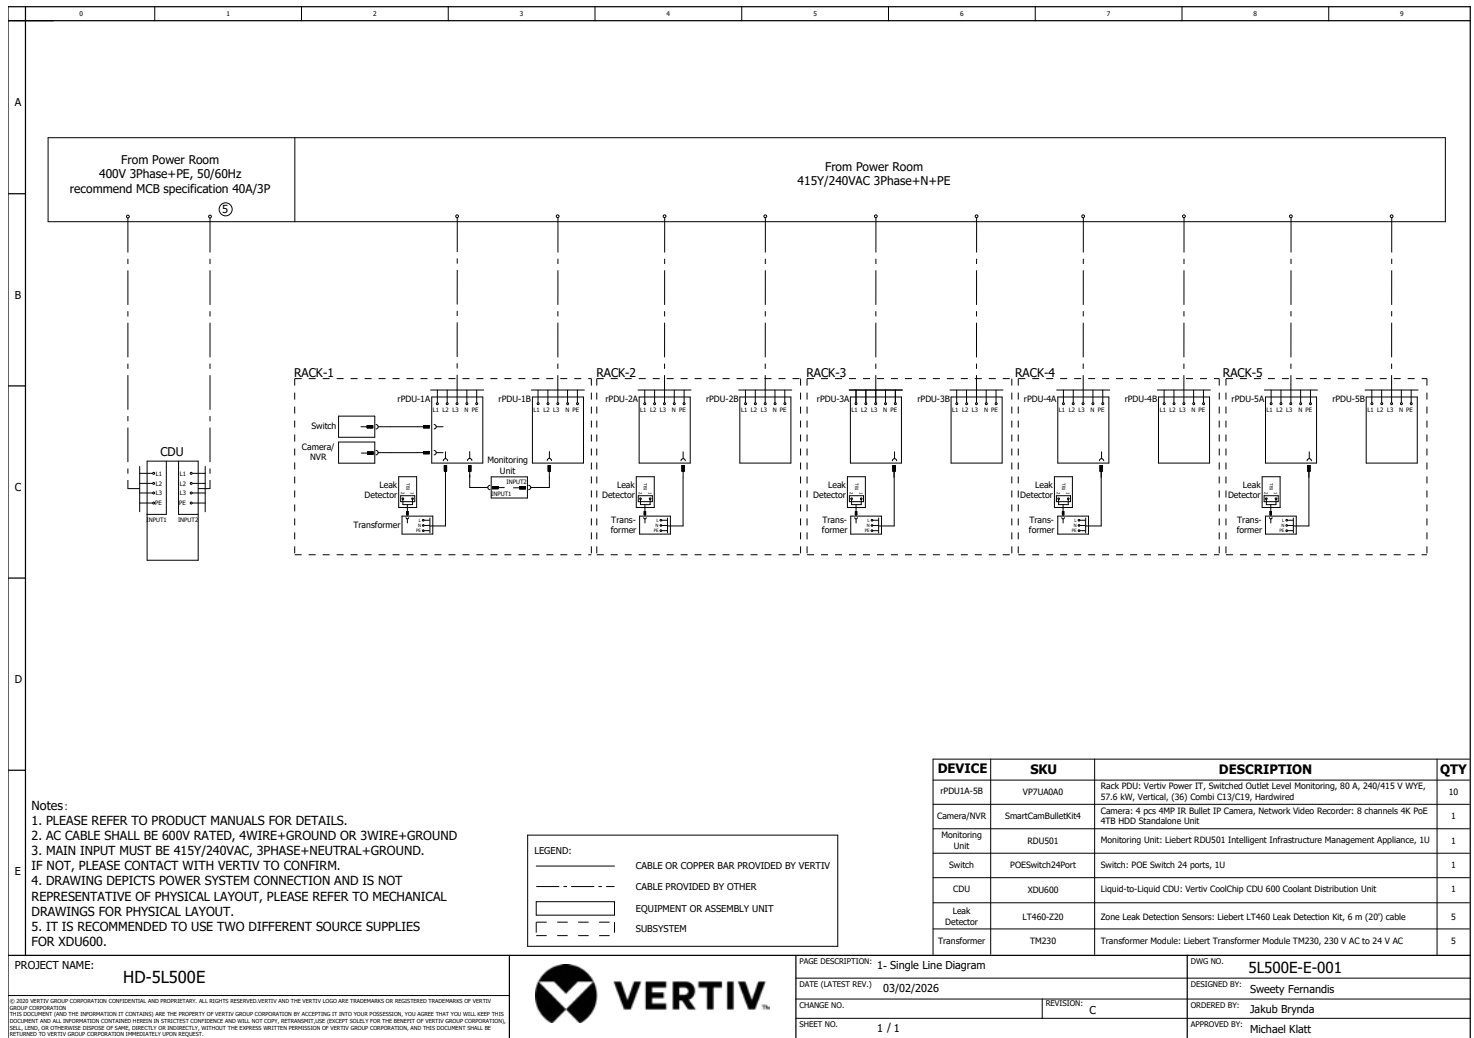

5.2 Monitoring diagram

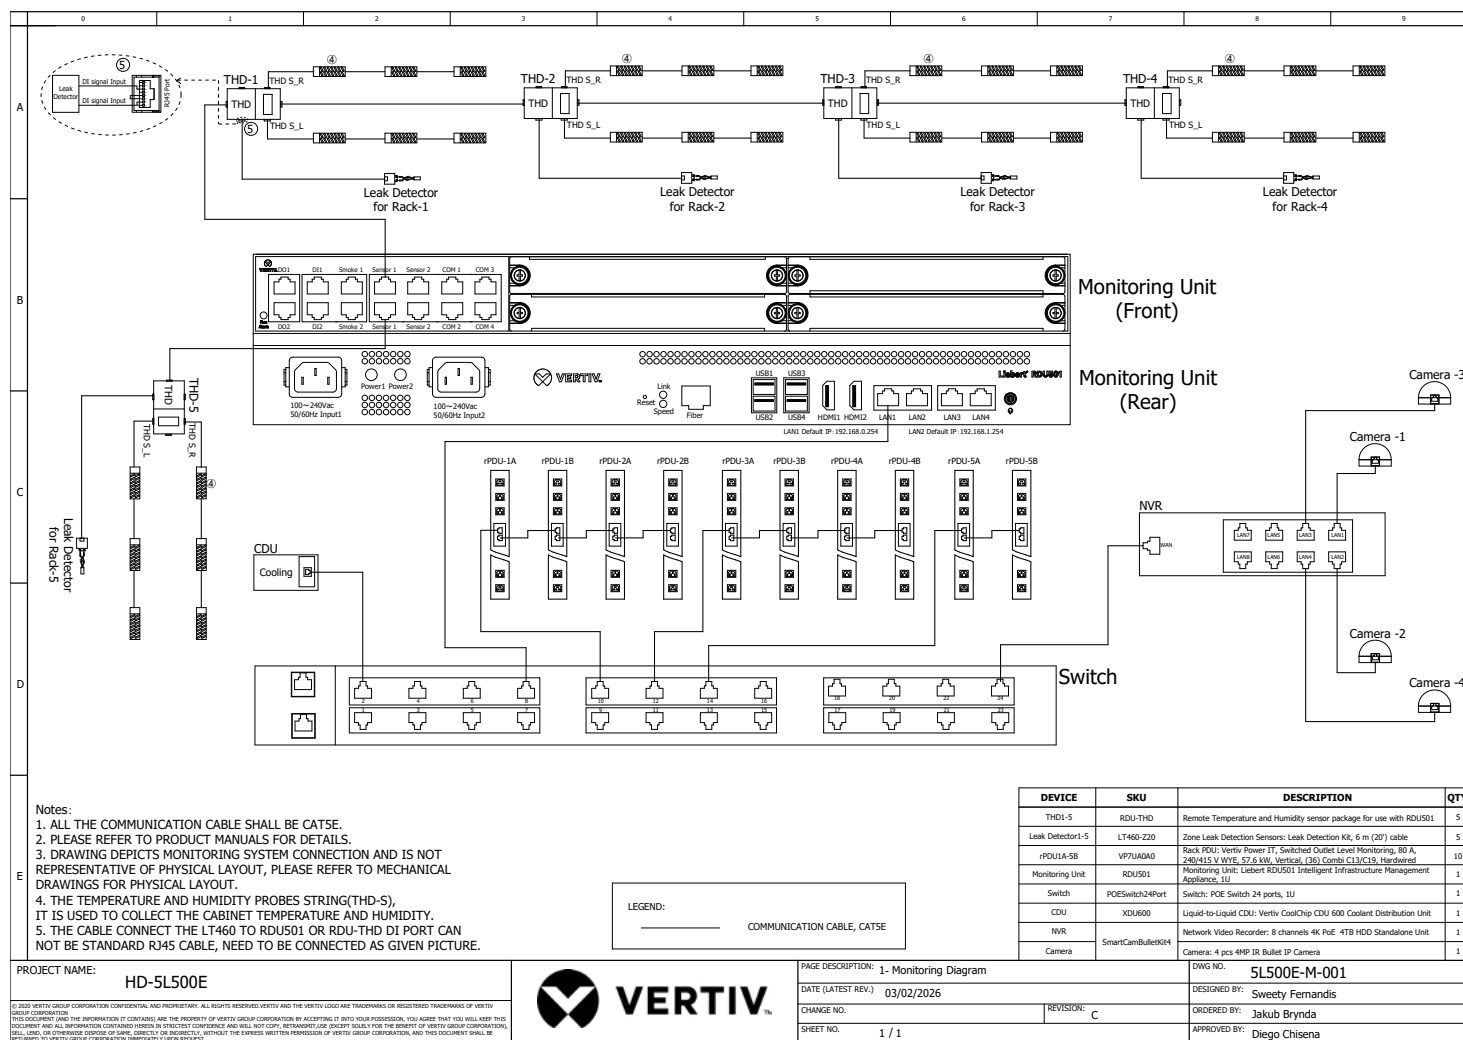



6. Technical specifications

6.1 Product weight

SKU	Quantity	Weight (per SKU)	Total weight
VR3357 (Rack)	5	180 kg (397 lbs)	900 kg (1985 lbs)
XDU600 (Coolant Distribution Unit)	1	429 kg (946 lbs)	429 kg (946 lbs)
RM124 (Rack manifold)	5	38 kg (83 lbs)	190 kg (415 lbs)
LT460-Z20 (Leak detector)	1	0.9 kg (2.0 lbs)	0.9 kg (2.0 lbs)
VP7UA0A0 (Rack PDU)	10	10 kg (22 lbs)	100 kg (220 lbs)
RDU501 (Monitoring)	1	10 kg (22 lbs)	10 kg (22 lbs)

6.2 Maximum static load capacity of rack

SKU	Maximum static load capacity
VR3357 (Rack)	1363 kg (3000 lbs)

6.3 Operation & storage conditions

Operation conditions	Storage conditions
Operation temperature range: 10°C to 40°C (50°F to 104°F)	Storage temperature range: -20°C to 50°C (-4°F to 122°F)
Operation relative humidity range: 10% to 90% RH (non-condensing)	Storage relative humidity range: 5% to 93% RH (non-condensing)

7. Product specification


7.1 Vertiv™ VR3357 Rack

Standardize your deployments around the world and bring them online faster with the Vertiv™ VR rack. The Vertiv VR supports a wide variety of equipment including servers, storage, switches, routers, PDUs, UPSs, console port servers and KVM switches. The Vertiv VR is delivered ready for high density environments to serve your mission critical needs – even as they evolve and change. This rack gives you the flexibility you need with easy installation.



Key Benefits:

- Built-to-last engineering: This 48U rack is designed for rapid deployment even in high density environments with load capacities of 3,000 pounds static and 2,500 pounds dynamic.
- Fully configurable: Tool-less installation and removal of accessories and additional shelves allow you to modify this rack cabinet to suit the ever-changing needs of your network.
- 2.5 Inches more usable depth: The Vertiv VR Rack is designed to provide you around 2.5 inches more useable depth than any standard 19-inch rack cabinet.
- Dimensions: This server enclosure has dimensions of 2265mm x 800mm x 1200mm (height, width, and depth).
- Supports wide variety of equipment: This 48U server rack supports rack-based equipment including: servers, storage, PDUs, UPSs, console servers, and KVM switches.



Scan the QR code
to get more information

7.2 Vertiv™ CoolChip CDU 600 Coolant Distribution Unit

Designed to support liquid cooling within high density environments, the Vertiv™ CoolChip CDU 600 Coolant Distribution Unit is suitable for direct-to-chip and rear door cooling applications to offer easy, cost-effective deployment in any data center. The Vertiv CoolChip CDU 600 Coolant Distribution Unit utilizes a liquid-to-liquid heat exchange design, allowing you to tap into the benefits of liquid-cooled servers to more efficiently support higher rack densities while maintaining optimal system conditions.



Key Benefits:


- Secondary circuit flow of 450 l/m (19 gpm) at 2.2 bar (32 psi) external DP, up to 900 l/m (238 gpm) at 1.3 bar (19 psi) external in dual pump mode.
- Low pressure drop 2.5 in. pipe-work, components and heat exchanger.
- Two inverters, controlled via RS485 enables detailed reporting of data, status, seamless pump change-over, and dual pump running mode.
- Large heat exchanger for low "Approach Temp Diff" 600 kW at 4.0°C (7.2°F).
- Effective separation of primary/ secondary water circuits.
- All stainless-steel secondary circuit with self-filling and venting capability.
- Large dual redundant secondary filters at 50μ and primary filter at 500μ for concurrent maintainability.
- Large capacity dual redundant expansion vessels.
- Easy to install, pipe connection options including internal manifold.
- Low center of gravity helps with Seismic compliance and logistics.
- 7 in. color touchscreen Human-Machine Interface (HMI) and ARM Cortex M7 based controller.
- Communication via Modbus RTU (RS485) and TCP/IP protocols.
- Triple redundant secondary supply sensors and redundant RH sensors.
- Fully configurable for various installation options and features.
- CE, cULus and IEC compliant.



Scan the QR code
to get more information

7.3 Vertiv™ CoolChip Fluid Network

The Vertiv™ CoolChip Fluid Network is an in-rack manifold that provides a reliable, clean, and effective route between server and coolant distribution unit. Mounting in the zero-U space of any industry-standard rack, the stainless-steel rack manifolds were designed with dripless quick disconnects and multiple coupling sizes for easy install and highly tailored to any deployment size.

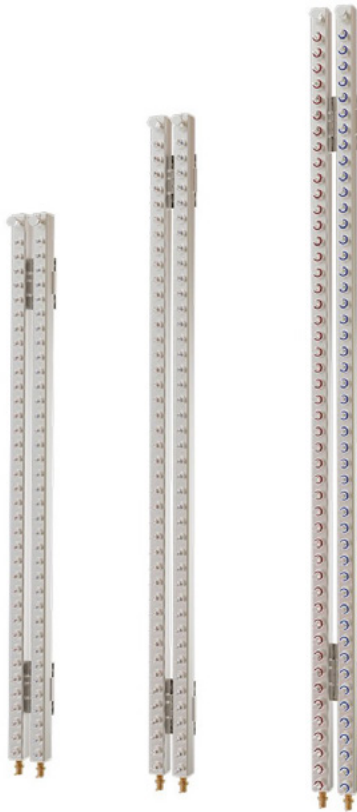

Key Benefits:

- Meet various deployment needs with multiple configurations.
- Provide high cooling availability and efficiency with several coupling options for proper sizing.
- Universal mounting bracket speeds installation
- Assured cleanliness with vacuum brazed stainless-steel construction and factory validated precleaning process.

Main Features:

- Stainless Steel Construction provides a durable and robust product.
- Multiple Sizes and Flow Rates allow for customization of your liquid cooling deployment.
- Universal Mounting Bracket support mounting on any industry-standard rack.
- Dripless Quick Disconnects support quick and safe installation and service operation.
- Air Bleeder Valve eases installation complexity and increases system efficiency, maximizing the amount of cooling fluid in the circuit.
- Integrated Drain Valve allows for easy installation and maintenance.
- Top or Bottom Connections enable configuration in the field, adding flexibility to the install and application.



Scan the QR code
to get more information

7.4 Vertiv™ Liebert® LT460 Zone Leak Detection Sensors

The zone leak detection sensor modules install quickly and work simply for reliable warning of potentially hazardous moisture conditions. The supervised zone leak detector uses up to 100 feet of flexible Vertiv™ Liebert® moisture sensing cable, offering protection from unwanted leaks. Designed for use with Vertiv™ Liebert® LT500Y leak detection cable, the Vertiv™ Liqui-tect™ 460 is the ideal solution for perimeter sensing or serpentine coverage of small areas. Selectable modes of operation provide flexible alarming options and protection for the cable. Selectable alarm delays minimize false-positive conditions.



Key Benefits:

- Dual output relays can signal to a local alarm panel, a remote building management system, or to Vertiv™ Liebert® SiteScan™ Web.
- Selectable alarm delays allow reporting customization.
- Perimeter sensing or serpentine coverage of small area.

Main Features:

- Zone leak detection sensor.
- Monitors up to 100 feet of leak detection cable.
- Reports to local or centralized monitor panels.
- Installs easily.



**Scan the QR code
to get more information**

7.5 Vertiv™ PowerIT rPDU VP7UA0A0

Upgradeable Switched Outlet Level Monitored rPDUs provide reliable power distribution to critical IT equipment while delivering individual outlet level control and a comprehensive view of outlet level power usage via remote network access. Includes environmental monitoring capabilities to obtain real-time environmental metrics.




Product Summary:

- Vertiv™ PowerIT rPDU, Switched Outlet Level Monitoring, 80 A, 240/415 V WYE, 57.6 kW, Vertical, (36) Combination C13/C19, Hardwired, Black Powder Coat.

Key Benefits:

- Remotely reboot outlets to power cycle unresponsive IT equipment or increase runtime of critical equipment upon power failure with outlet-level control.
- Reliable power distribution with local and remote outlet-level power monitoring options offers quick access to critical power usage information down to the device level to evaluate energy usage trends and maximize uptime.
- The monitoring offers redundant power capability providing continuous supervision even during an outage. Receive alert and alarm notifications when user-specified thresholds are breached via email, SMS, and SNMP traps.
- Environmental monitoring capabilities with the addition of optional environmental sensors help users have critical infrastructure data at their fingertips to prevent climate-related equipment failure and system downtime.
- Fault-Tolerant Daisy Chaining with RSTP simplifies intelligent rPDU connectivity and secures data is reported even when a break in the network chain occurs. Supports up to 40 rPDUs.
- Daisy-chain up to 50 devices on a single IP address and reduce deployment time with self-configuration of downstream devices.
- Provide reliable protection with a secure boot and a hardware trust anchor safeguarding critical infrastructure against unauthorized access.



Scan the QR code
to get more information

7.6 Vertiv™ Liebert® RDU501

The Liebert® RDU501 is an intelligent infrastructure management solution from Vertiv that allows data center administrators to monitor environmental conditions and infrastructure appliances such as UPS, precision cooling units, generator sets, etc.

The Liebert RDU501 is a premium infrastructure gateway appliance equipped with out-of-band access to service processors as well as serial console management capabilities.



Fast Deployment:

- R 2.5D SmartSolutions Modelling with drag-and-drop interface.

Environmental Monitoring:

- Heat, Power and Assets Monitoring Dashboard.
- Thermal Management (including CRAC teamwork).
- Power Management.
- Security Management.
- Alarm and Data Reports.

IT Management Monitoring:

- Remote and local server management via IPMI 2.0 protocol
- Serial Console Management (Out-of-band access)
- Automated Startup and Shutdown of IT servers.



**Scan the QR code
to get more information**

