
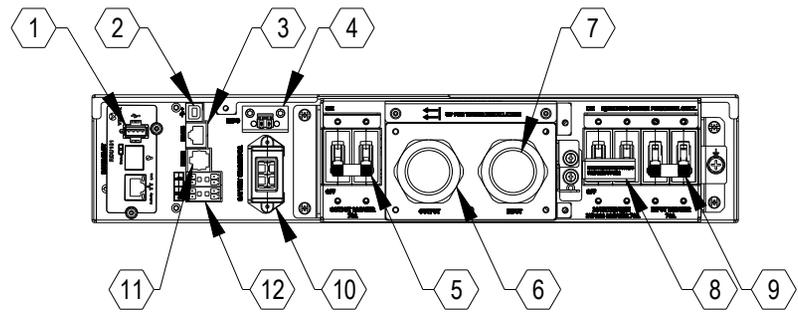



2

1

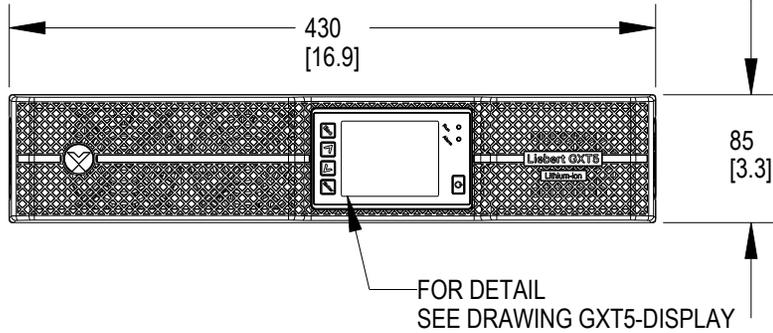

FRONT VIEW

REAR VIEW

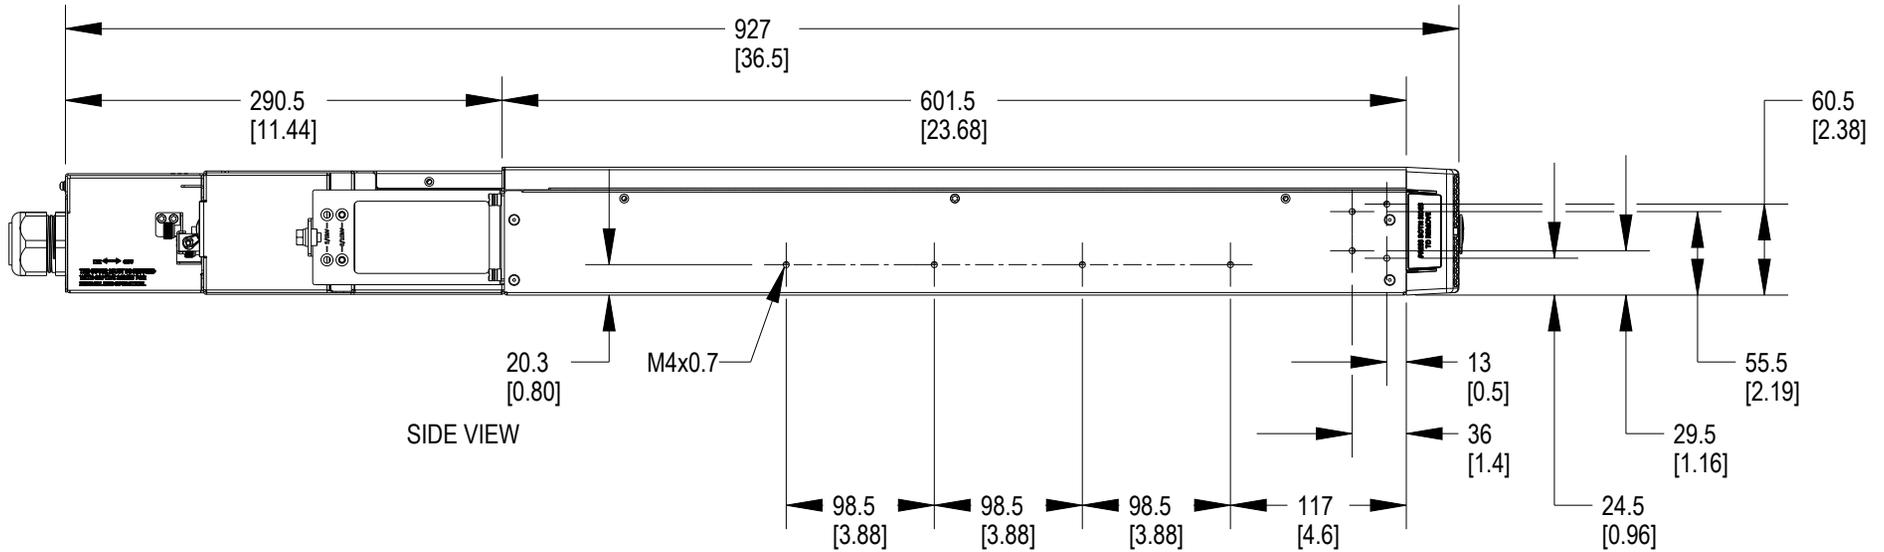

SIDE VIEW

- ① INTELLISLOT PORT
- ② USB PORT
- ③ EXTERNAL BATTERY CABINET (EBC) COMMUNICATION PORT (RS485)
- ④ REPO CONNECTOR
- ⑤ 70A OUTPUT CIRCUIT BREAKER
- ⑥ OUTPUT HARDWIRE CONNECTION
- ⑦ INPUT HARDWIRE CONNECTION
- ⑧ 70A MAINTENANCE BYPASS CIRCUIT BREAKER
- ⑨ 70A INPUT CIRCUIT BREAKER
- ⑩ EBC CONNECTOR
- ⑪ RS-232 PORT USED FOR (CLI)
- ⑫ DRY CONTACT COMMUNICATION TERMINAL BLOCK

NOTES

1. UNIT DIMENSIONS (WxDxH) 430mm x 927mm x 85mm (2U)
(16.9" x (36.5") x (3.3"))
2. UNIT WEIGHT WITH EBC: 48kg (105lbs)
3. UNIT WEIGHT WITHOUT EBC: 26kg (57lbs)
4. SHIPPING DIMENSIONS (WxDxH) 798mm x 998mm x 532mm
(31.4" x (39.3") x (20.9"))
5. SHIPPING WEIGHT 75kg (165lbs)
6. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0") FRONT AND REAR.

SHEET NO. 1 OF 2	DRAWN BY: ANIKET PATIL
CO. NO. -	DESIGNED BY: PETE BENNER
REF DWG. -	APPROVED BY: LUKE JOHNSON

REFER TO PAGE 2 FOR BATTERY DRAWING AND DIMENSIONS

OUTLINE DRAWING
LIEBERT GXT5 LITHIUM-ION 10000VA
200/240 VAC RACK/TOWER UPS

DWG. NO. GXT5LI_10000GVRT
DATE (LATEST REV.) 2024/04/24
REVISION 0
505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082






2

1

2

1

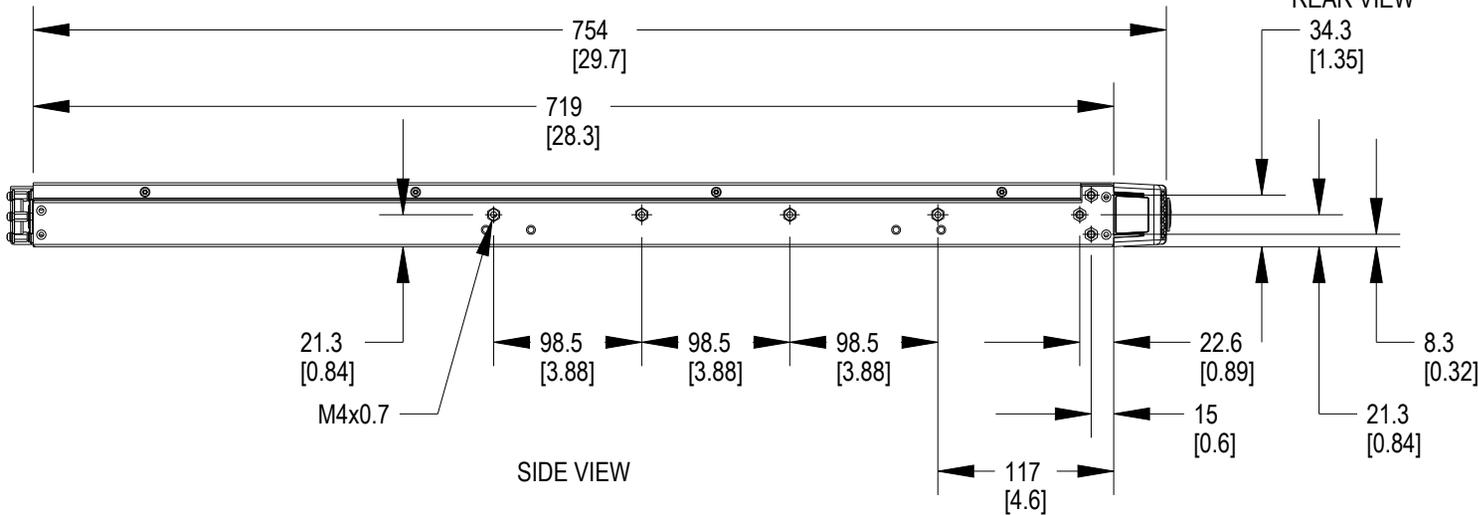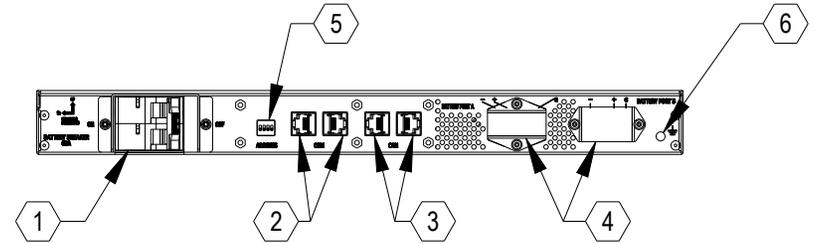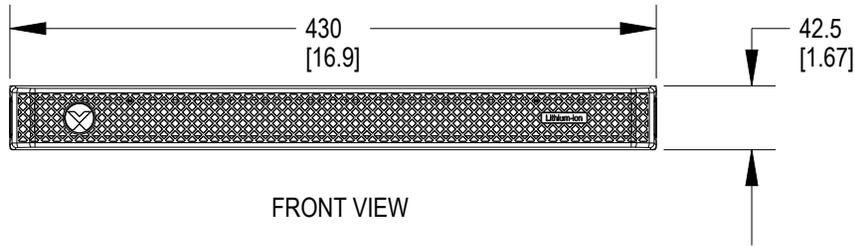

- 1 OUTPUT CIRCUIT BREAKER (63A)
- 2 EXTERNAL BATTERY CABINET COM PORTS
- 3 EXTERNAL BATTERY CABINET CAN PORTS
- 4 EXTERNAL BATTERY CABINET POWER CONNECTORS
- 5 ADDRESS DIP SWITCH
- 6 GROUND SCREW

NOTES

- 1. UNIT DIMENSIONS (WxDxH) 430mm x 754mm x 42.5mm (1U)
(16.9") x (29.7") x (1.7")
- 2. UNIT WEIGHT: 22kg (48.5lbs)
- 3. SHIPPING DIMENSIONS (WxDxH) 800mm x 1000mm x 285mm
31.4" xx 39.3" x 11.2"
- 4. SHIPPING WEIGHT 48.5kg (106.9lbs)
- 5. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0")
FRONT AND REAR.

SHEET NO. 2 OF 2	DRAWN BY: ANIKET PATIL
CO. NO. -	DESIGNED BY: PETE BENNER
REF DWG. -	APPROVED BY: LUKE JOHNSON

OUTLINE DRAWING LIEBERT GXT5 LITHIUM-ION 5-10kVA 192V EXTERNAL BATTERY CABINET	
---	--

DWG. NO. GXT5LI_10000GVRT
DATE (LATEST REV.) 2024/04/24
REVISION 0
505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082



2

1