


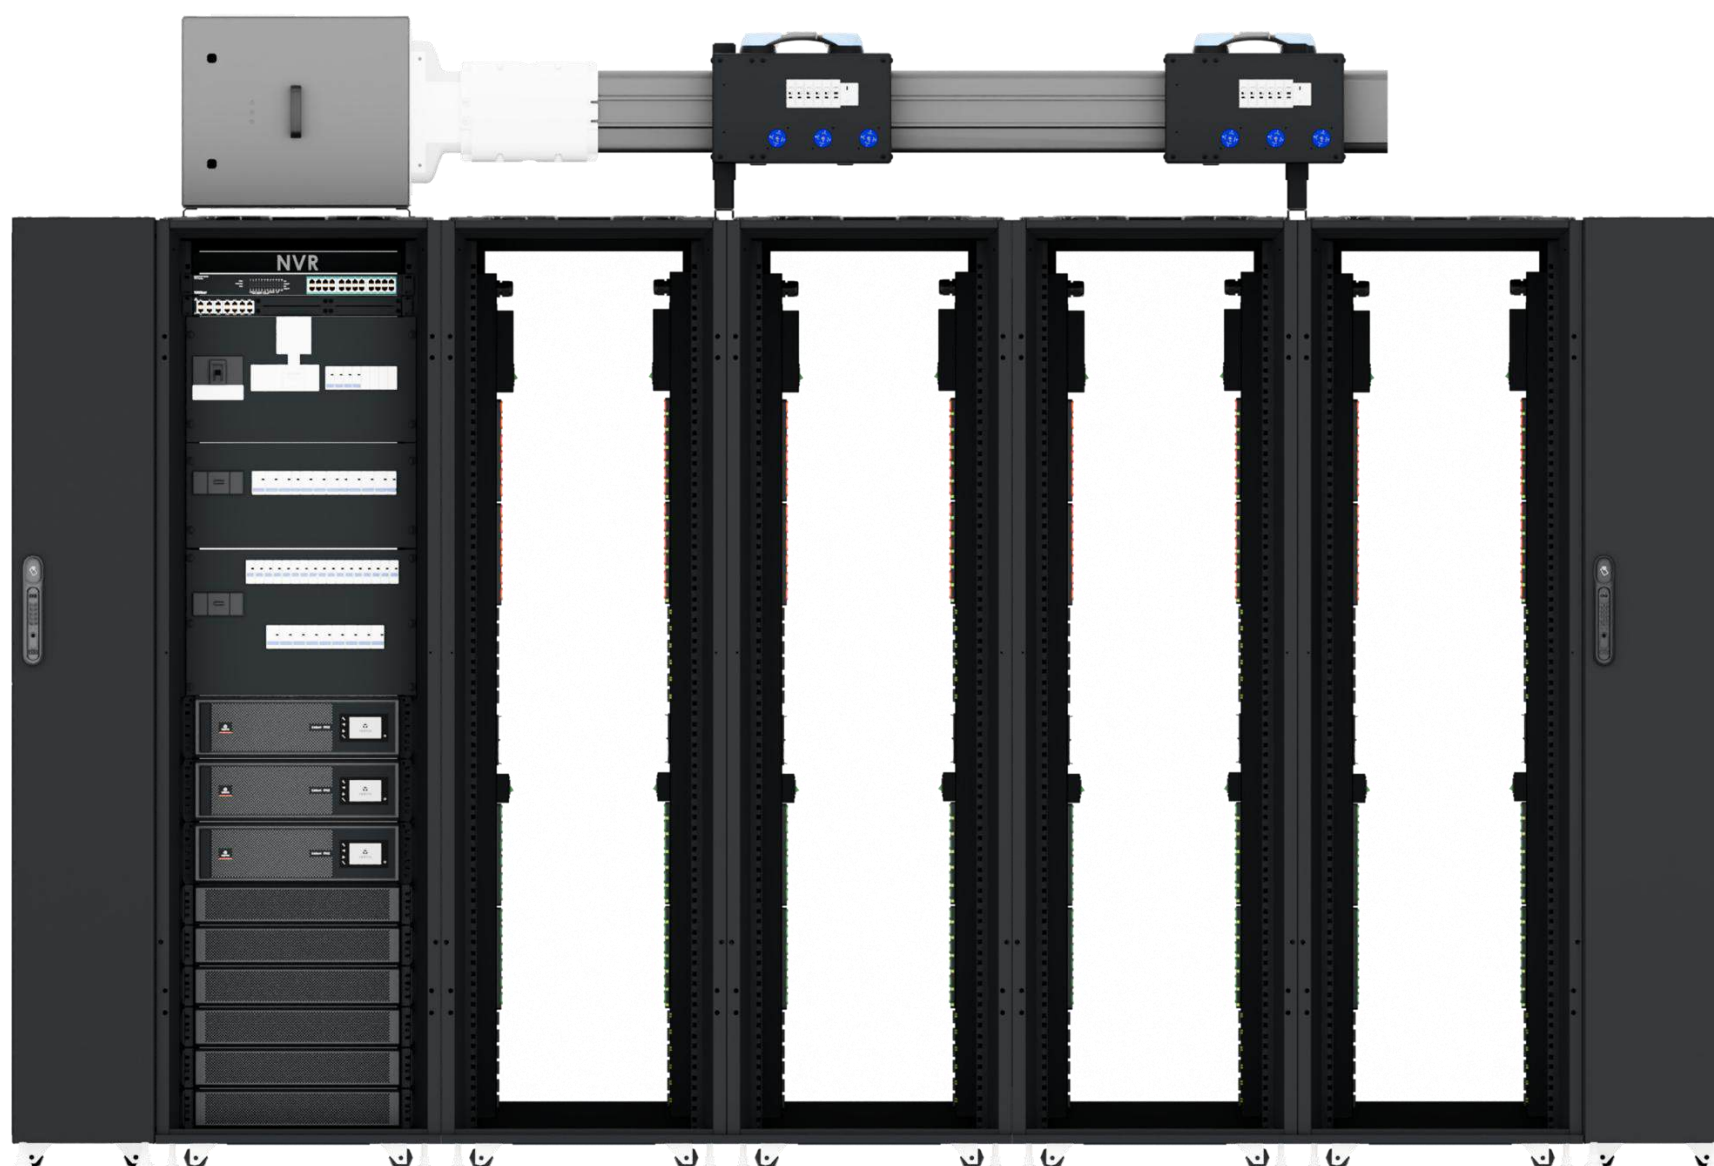

Solution: SR2N04040PAB1

1. Change Log..... 3

2. Site Planning Datasheet..... 4

3. Interconnection Guide (ICG)..... 5

4. Field Supplied Cable & Part List 21

5. Vertiv MSR2 600mm IT Rack 22

6. Power Management Cabinet - 40kW (PMC40) 23

7. CRD30 24

8. Plenum CRD30 25

9. IMPB4BAR 26

10. JOINTPACK 27

11. END CAP 28

12. ROOFBRACKETS 29

13. V2 TPN 2x 50A 30

14. IMPB CEB 250A TPN 31

15. IMPB CEB 250A TPN 32

16. SCOPE OF WORK 33

1. Change Log

Rev	Date	Author	Description	Number of Change
A	04/24/2026	TK	Initial Release	CO-1127543

2. Site Planning Datasheet

Smart Row 2 Site Planning Datasheet (208V, 3 phase + PE)

Configuration Number	Part Number	Max Row Capacity (kW)	IT Racks per Row	Capacity per Rack (kW)	Cooling Units per Row	Rack PDU Count	Main Input Breaker Size	Condenser Breaker Size	Condenser Dry Weight kg (lbs)	Row Dimensions (L x H x D) mm (in)	Row Weight kg (lbs)	Min. Staging Area m2 (ft2)
31	SR2N03030NAB1	30	3	10	1	3	200 A	70 A	193 (424.6)	2700 (106.3) x 2433 (95.8) x 1400 (55.1)	1858 (4095)	22.34 (240.47)
32	SR2N03030PAB1	30	3	10	1	6	200 A	70 A	193 (424.6)	2700 (106.3) x 2433 (95.8) x 1400 (55.1)	1959 (4318)	23.40 (251.88)
33	SR2N03030FAB1	30	3	10	2	6	200 A	70 A	193 (424.6)	3000 (118.1) x 2433 (95.8) x 1400 (55.1)	2385 (5258)	27.05 (291.16)
34	SR2N04030NAB1	30	4	7.5	1	4	200 A	70 A	193 (424.6)	3300 (129.9) x 2433 (95.8) x 1400 (55.1)	2069 (4562)	24.38 (262.42)
35	SR2N04030PAB1	30	4	7.5	1	8	200 A	70 A	193 (424.6)	3300 (129.9) x 2433 (95.8) x 1400 (55.1)	2178 (4802)	25.53 (274.80)
36	SR2N04030FAB1	30	4	7.5	2	8	200 A	70 A	193 (424.6)	3600 (141.7) x 2433 (95.8) x 1400 (55.1)	2604 (5742)	29.18 (314.09)
37	SR2N05030NAB1	30	5	6	1	5	200 A	70 A	193 (424.6)	3900 (153.5) x 2433 (95.8) x 1400 (55.1)	2281 (5028)	26.42 (284.38)
38	SR2N05030PAB1	30	5	6	1	10	200 A	70 A	193 (424.6)	3900 (153.5) x 2433 (95.8) x 1400 (55.1)	2397 (5284)	27.66 (297.73)
39	SR2N05030FAB1	30	5	6	2	10	200 A	70 A	193 (424.6)	4200 (165.4) x 2433 (95.8) x 1400 (55.1)	2823 (6224)	31.31 (337.02)
40	SR2N04040NAB1	40	4	10	2	4	200 A	70 A	193 (424.6)	3600 (141.7) x 2433 (95.8) x 1400 (55.1)	2484 (5476)	27.83 (299.56)
41	SR2N04040PAB1	40	4	10	2	8	200 A	70 A	193 (424.6)	3600 (141.7) x 2433 (95.8) x 1400 (55.1)	2581 (5690)	28.78 (309.79)
42	SR2N04040FAB1	40	4	10	3	8	200 A	70 A	193 (424.6)	3900 (153.5) x 2433 (95.8) x 1400 (55.1)	2007 (6630)	32.43 (349.07)
43	SR2N05040NAB1	40	5	8	2	5	200 A	70 A	193 (424.6)	4200 (165.4) x 2433 (95.8) x 1400 (55.1)	2709 (5973)	30.07 (323.67)
44	SR2N05040PAB1	40	5	8	2	10	200 A	70 A	193 (424.6)	4200 (165.4) x 2433 (95.8) x 1400 (55.1)	2828 (6234)	31.31 (337.02)
45	SR2N05040FAB1	40	5	8	3	10	200 A	70 A	193 (424.6)	4500 (177.2) x 2433 (95.8) x 1400 (55.1)	3254 (7174)	34.96 (376.31)
46	SR2N06040NAB1	40	6	6.8	2	6	200 A	70 A	193 (424.6)	4800 (189.0) x 2433 (95.8) x 1400 (55.1)	2951 (6505)	32.57 (350.58)
47	SR2N06040PAB1	40	6	6.8	2	12	200 A	70 A	193 (424.6)	4800 (189.0) x 2433 (95.8) x 1400 (55.1)	3096 (6827)	34.28 (368.99)
48	SR2N06040FAB1	40	6	6.8	3	12	200 A	70 A	193 (424.6)	5100 (200.8) x 2433 (95.8) x 1400 (55.1)	3523 (7767)	37.93 (408.28)
49	SR2N07040NAB1	40	7	5.7	2	7	200 A	70 A	193 (424.6)	5400 (212.6) x 2433 (95.8) x 1400 (55.1)	3169 (6986)	34.71 (373.62)
50	SR2N07040PAB1	40	7	5.7	2	14	200 A	70 A	193 (424.6)	5400 (212.6) x 2433 (95.8) x 1400 (55.1)	3329 (7339)	36.61 (394.07)
51	SR2N07040FAB1	40	7	5.7	3	14	200 A	70 A	193 (424.6)	5700 (224.4) x 2433 (95.8) x 1400 (55.1)	3755 (8279)	40.26 (433.36)
52	SR2N08040NAB1	40	8	5	2	8	200 A	70 A	193 (424.6)	6000 (236.2) x 2433 (95.8) x 1400 (55.1)	3380 (7452)	36.75 (395.57)
53	SR2N08040PAB1	40	8	5	2	16	200 A	70 A	193 (424.6)	6000 (236.2) x 2433 (95.8) x 1400 (55.1)	3547 (7821)	38.74 (416.99)
54	SR2N08040FAB1	40	8	5	3	16	200 A	70 A	193 (424.6)	6300 (248.0) x 2433 (95.8) x 1400 (55.1)	3974 (8761)	42.39 (456.28)


Notes:

- System Environmental Conditions: Indoors, 41°F to 104°F (5°C to 40°C), RH to 80% with Max dew point of 82.4°F (28°C) Meets the requirements of data center or computer room environments.
- Floor surface must be level and continuous (expansion joints sealed, raised floor tile gaps sealed) Ground bearing capacity is more than 1000 kg/m2
- No building springler head should be within 19.7 in (0.5 m)
- Install in accordance with national and local electrical codes
- Cable Sizing (Main Input Breaker Size) 3/0 AWG
- Row Dimensions do not include necessary space needed for access including per ADA or local codes

SHEET NO.	DRAWN BY:	© 2024 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE THE PROPERTY OF VERTIV GROUP CORPORATION. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, TRANSMIT, USE EXCEPT AS AUTHORIZED BY VERTIV GROUP CORPORATION, SELL, LEND, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.		DWG. NO.	 VERTIV [™]	
CO. NO.	DESIGNED BY:	DATE (LATEST REV.)				
REF. DWG.	APPROVED BY:	REVISION 05.N. CLEVELAND AVE WESTERVILLE, OHIO 43081				
TITLE Smart Row 2 Site Planning Datasheet (208V, 3 phase + PE)						

3. Interconnection Guide (ICG)

Vertiv Row Solution Knowledge to Build Optimized Infrastructure Solutions 																	
Vertiv™ SmartRow™ 2: 4x IT Rack 40kW																	
																	
Row IT Load Capacity: 40 kW Power Redundancy UPS: Yes Power Redundancy rPDU: Yes Cooling Redundancy: No Dimensions: Length: 11.81 ft [3600 mm] Depth: 4.6 ft [1400 mm] Height: 7.98 ft [2433 mm]																	
SHEET NO. 1 / 16		DRAWN BY: Nilesch Patil		DWG NO. SR2N04040PAB1													
CHANGE NO.		APPROVED BY: Petr Harant		DATE (LATEST REV) 01.09.2026		 VERTIV™											
PAGE DESCRIPTION: 1 - Title page / cover sheet				REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081													
© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT IS THE PROPERTY OF VERTIV GROUP CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED HEREIN. IT IS NOT TO BE REPRODUCED, COPIED, OR OTHERWISE DISCLOSED TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.																	
TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 4x IT Rack 40kW																	

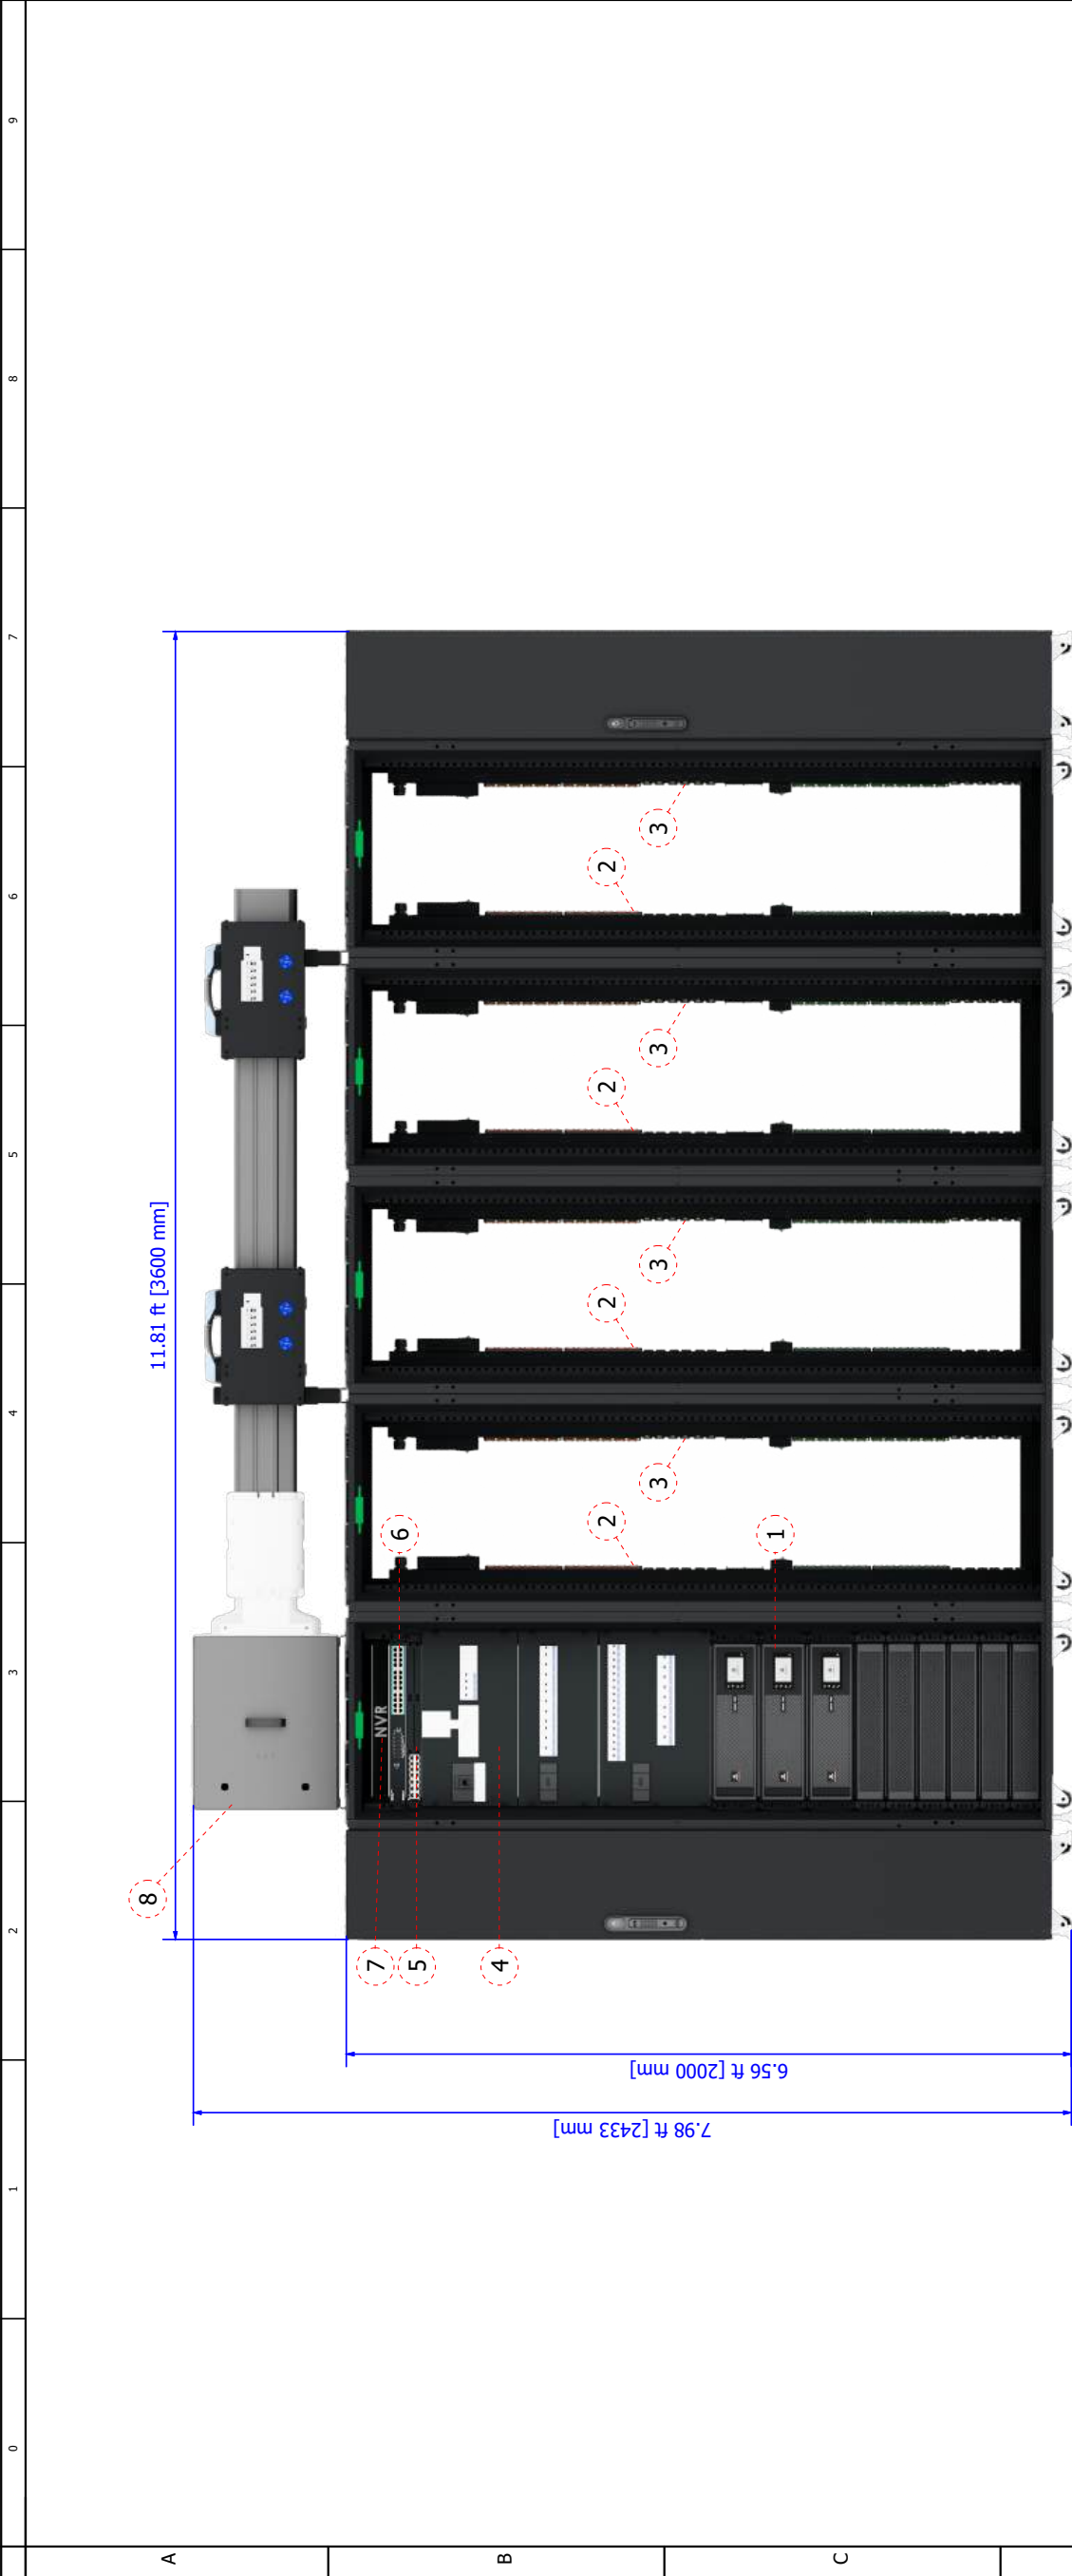

Front View


No.	Components	No.	Components
1	ITA2 20k UPS 2+1	6	PoE Switch
2	rPDU Feed A	7	NVR (optional)
3	rPDU Feed B	8	IMPB System A/B
4	Power Management Part PMC40		
5	RDU501		

Notes:


- 1. Row IT Load Capacity is driven by number of IT-Racks (IT-Rack x 10 kW per rack).
- 2. System Environmental Conditions: Indoors, 41 F to 104 F (5 C to 40 C), RH to 80% with Max dew point of 82.4 F (28 C).
- 3. Floor surface must be level and continuous (expansion joints sealed, raised floor tile gaps sealed, no floor drains, etc).
- 4. No building sprinkler head should be within 19.7 in (0.5 m).

— 2T Sensor mounted on rack roof


SHEET NO. 2 / 16		DRAWN BY: Nilesh Patil		DWG NO. SR2N04040PAB1			
CHANGE NO.		APPROVED BY: Petr Harant					
PAGE DESCRIPTION: 2 - vRow Front View				TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 4x IT Rack 40kW			
© 2020 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND INFORMATION CONFIDENTIAL AND PROPRIETARY AND WILL NOT REPRODUCE, COPIY, DISTRIBUTE, DISCLOSE, OR OTHERWISE MAKE AVAILABLE TO ANY OTHER PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.							
DATE (LATEST REV.) 01.09.2026						REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081	
							

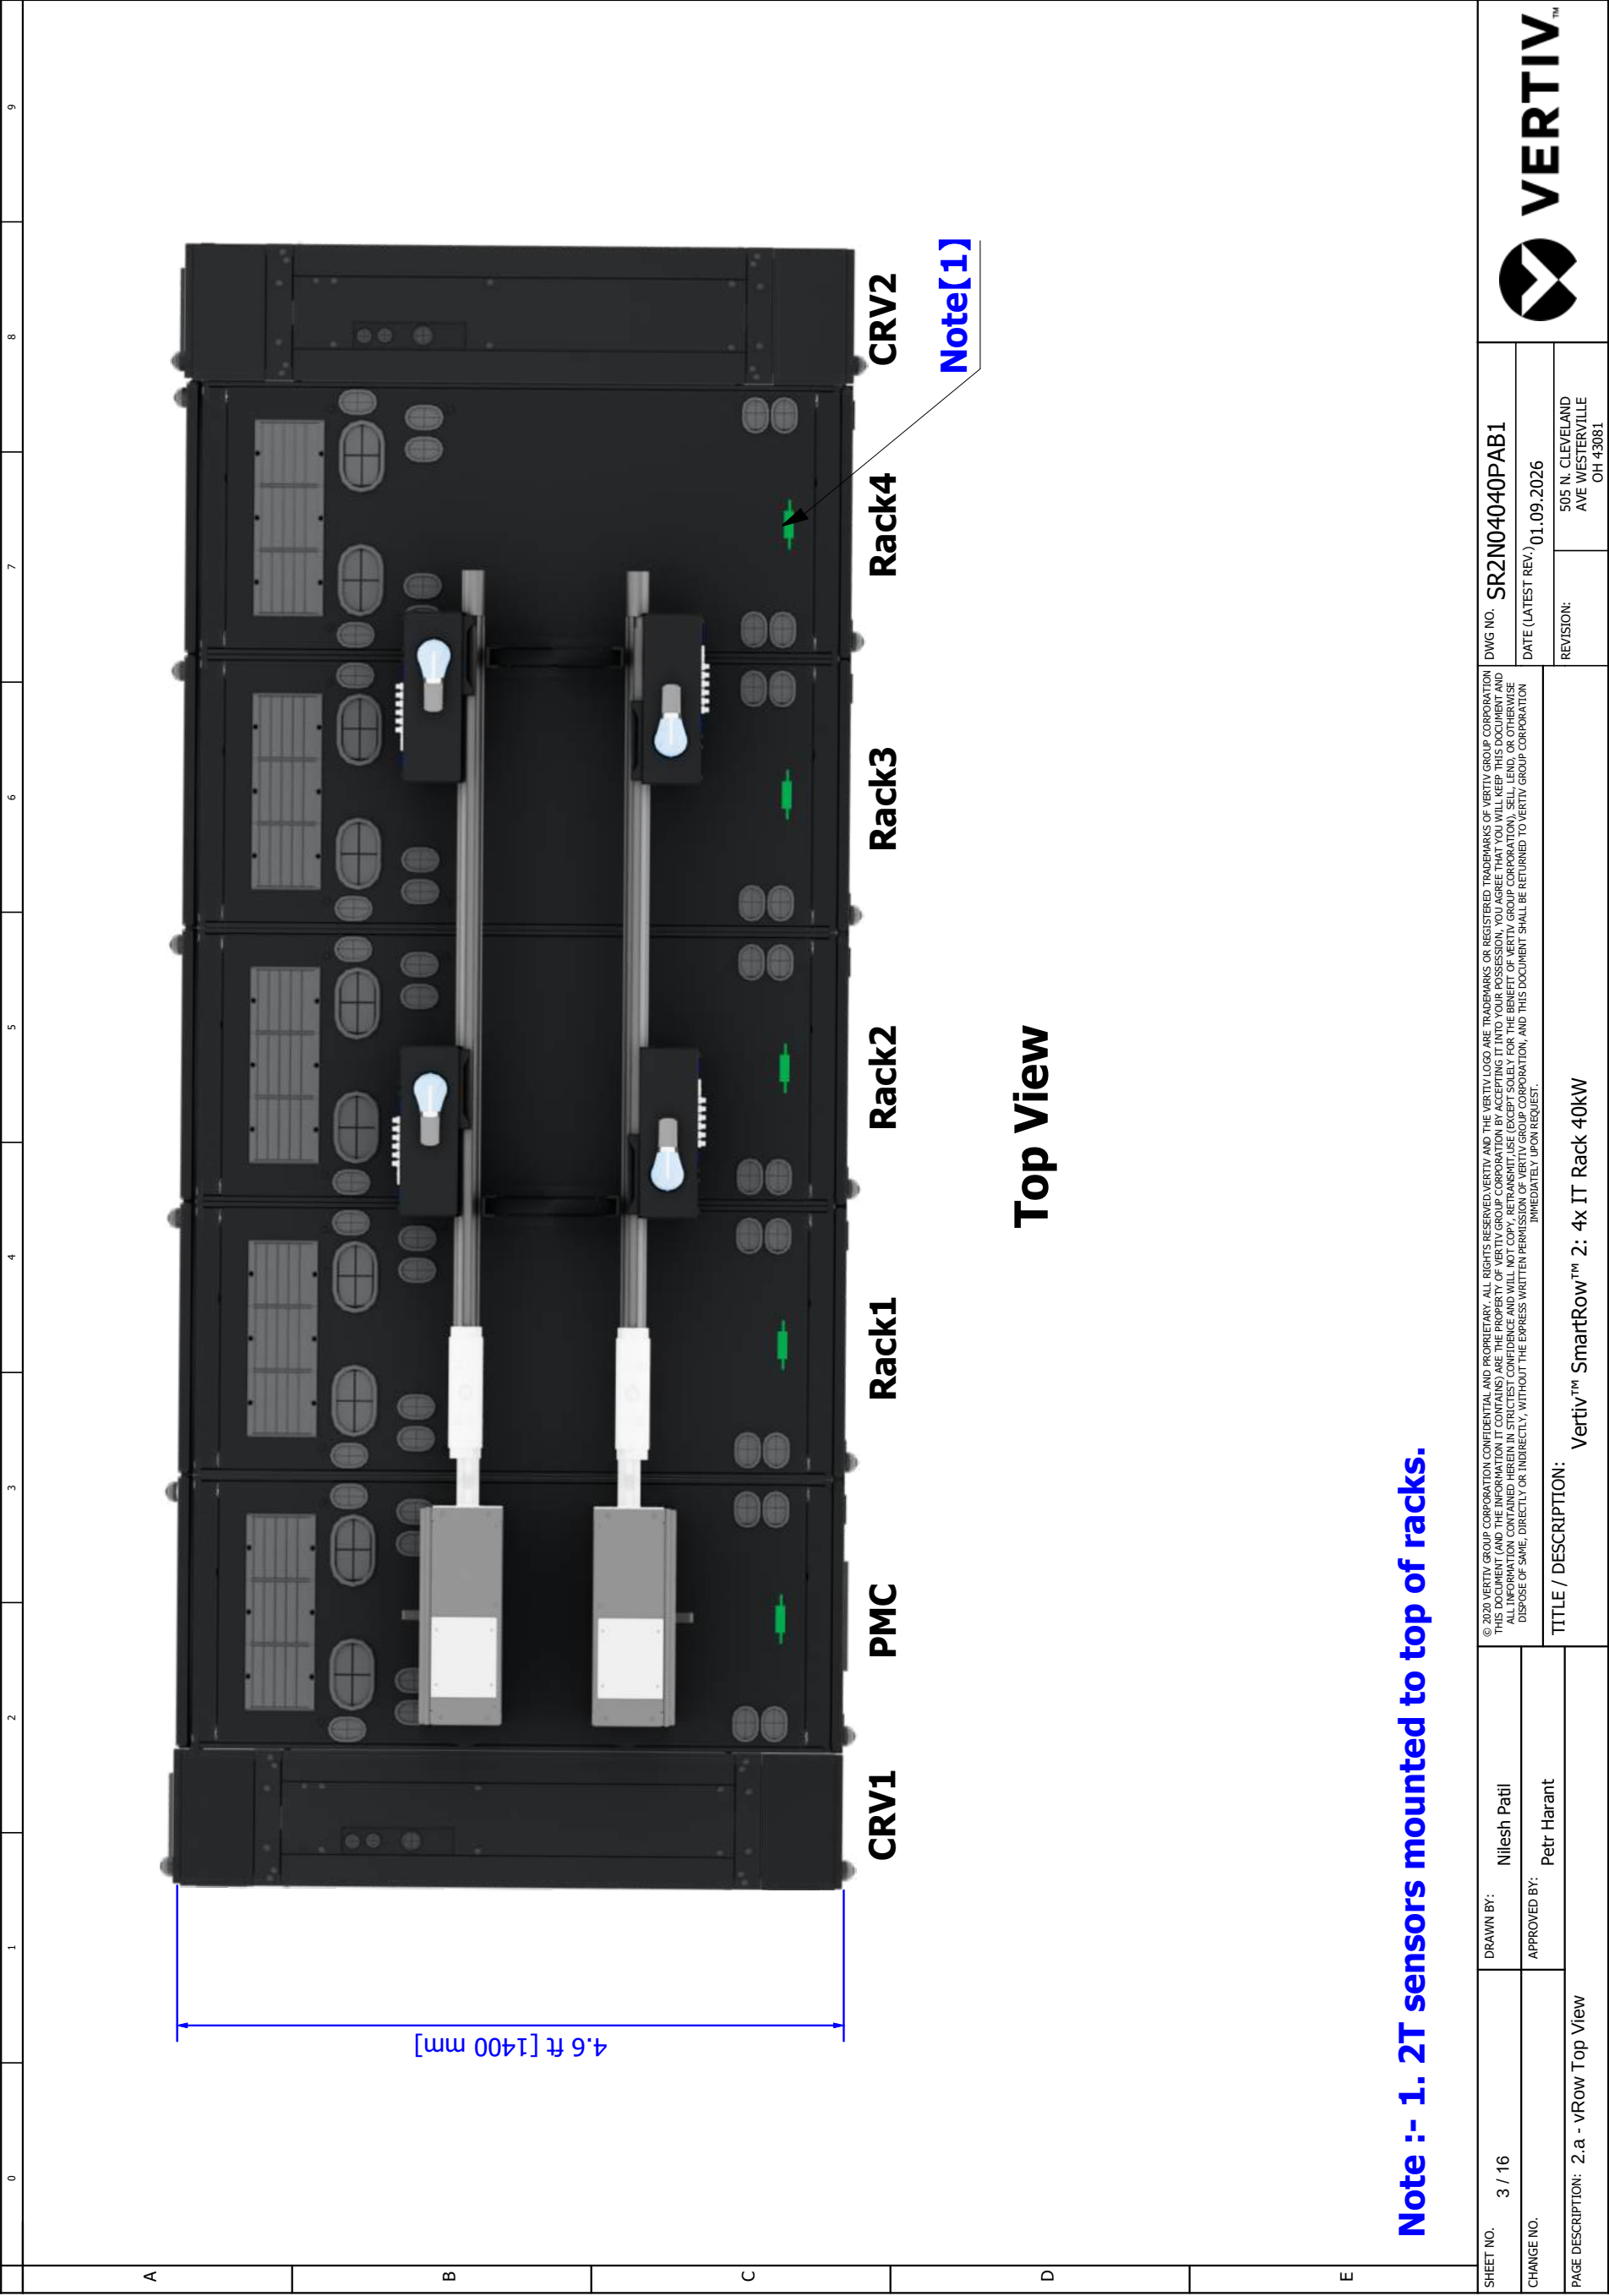

CRV Connection Details

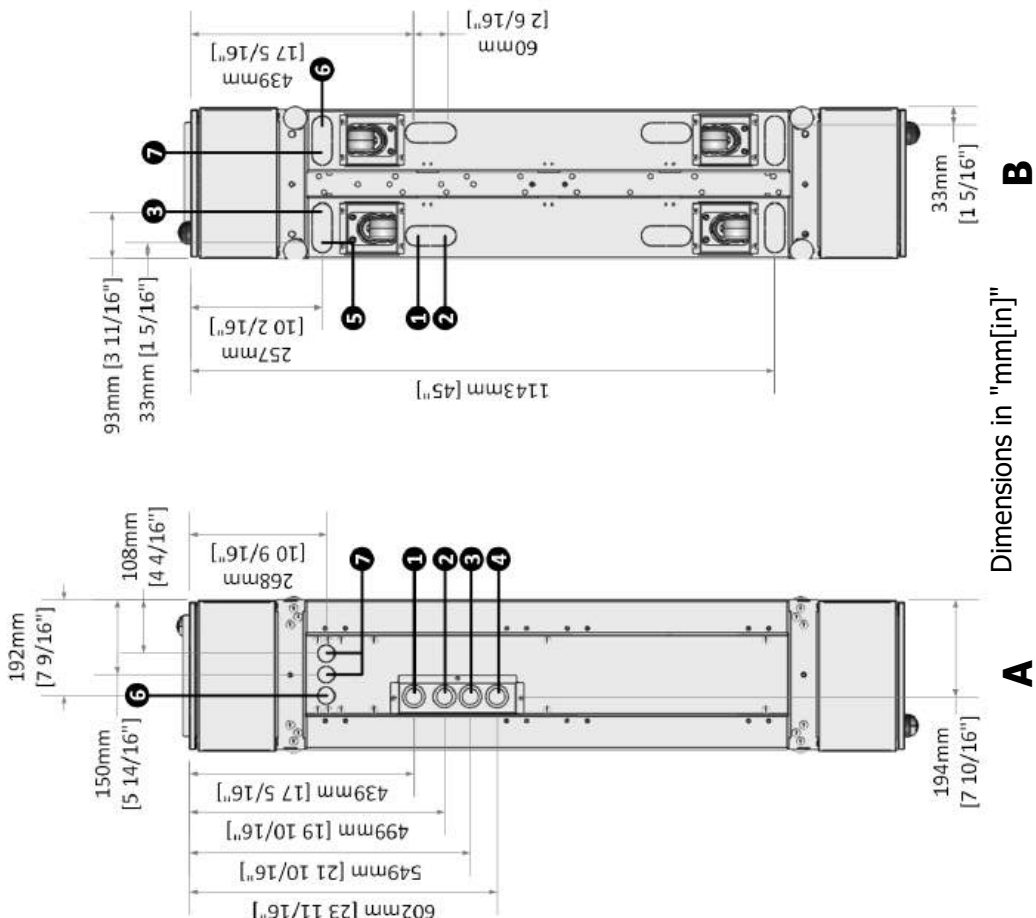

PMC/IT Cabinet Connection Details

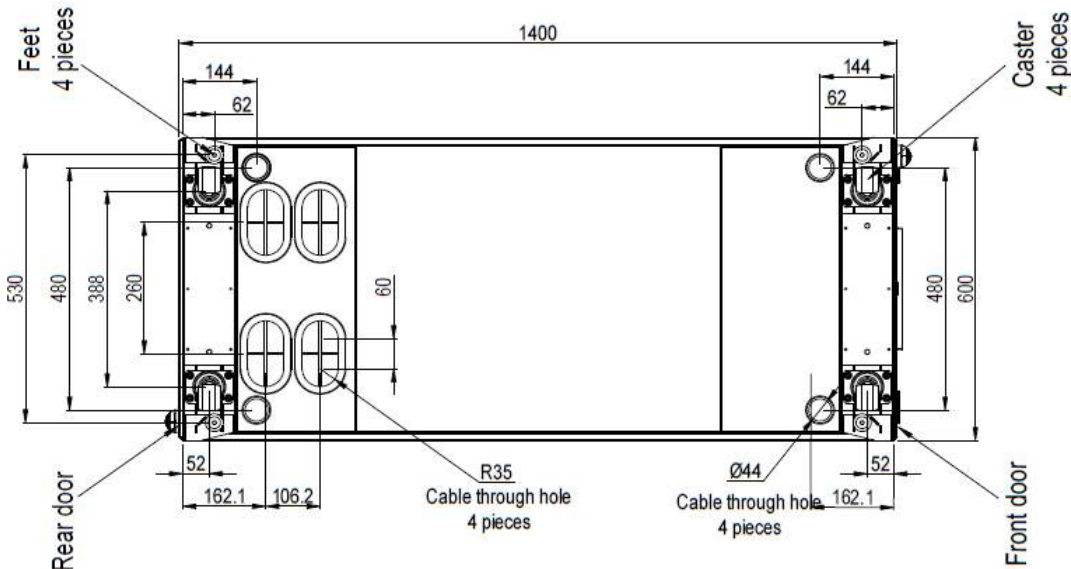

Item	Description	
A	Top Plate	
B	Bottom Plate	
1	RLT	Refrigerant liquid line inlet
2	RGT	Refrigerant gas line outlet
3	HS	Humidifier Supply
4	CPT	Condensate pump outlet
5	CGT	Condensate gravity outlet
6	HVT	High voltage cable access
7	LVT	Low voltage cable access

Note :- Pipe sizes are for connection purposes and not the required line size. Consult thermal manuals for line sizes.

PAGE DESCRIPTION: 2.b - vRow Bottom View		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 4x IT Rack 40kW	
DRAWN BY: Nilesht Patil		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081	
APPROVED BY: Petr Harant		DATE (LATEST REV.) 01.09.2026	
CHANGE NO.		DWG NO. SR2N04040PAB1	
SHEET NO. 4 / 16		© 2020 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION. YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ITS CONTENTS CONFIDENTIAL AND PROPRIETARY AND WILL NOT REPRODUCE, COPIY, OR DISCLOSE IT OR ITS CONTENTS TO ANY OTHER PERSON OR ENTITY WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.	
		 VERTIV™	

Cable overview

</



Cable overview

0										1										2										3										4										5										6										7										8										9									
Cable overview																																																																																																			
A										Packaging No.										Cable Category										Cable No.										Tag1										Tag2										Length (inch/mm)										Description																													
										0411B76D										UPS input cable (Onsite assembled)										W152										UPS3 Input: L1;L2;L3;N;G										UPS3 : inputA;B;C;N;G										51/1300										Input cable from PMC40 to UPS3																													
																				UPS output cable (Onsite assembled)										W153										UPS1 output : L1;L2;L3;N;G										UPS1 : outputA;B;C;N;G										51/1300										Output cable from UPS1 to PMC40																													
																				UPS output cable (Onsite assembled)										W154										UPS2 output: L1;L2;L3;N;G										UPS2 : outputA;B;C;N;G										51/1300										Output cable from UPS2 to PMC40																													
																				UPS output cable (Onsite assembled)										W155										UPS3 output: L1;L2;L3;N;G										UPS3 : outputA;B;C;N;G										51/1300										Output cable from UPS3 to PMC40																													
																				IMPB System input cable (Onsite assembled)										W157										IMPB System A:L1 L2 L3 N G										PMC:IMPB System A_L1 L2 L3 N G										102/2600										Cable between PMC40 and IMPB System A																													
B																				IMPB System input cable (Onsite assembled)										W158										IMPB System B:L1 L2 L3 N G										PMC:IMPB System B_L1 L2 L3 N G										102/2600										Cable between PMC40 and IMPB System B																													
																				CRV Input Power Cable (Onsite assembled)										W156-Short										L1 L2 G										L1 L2 G										197/5000										PMC40 to CRAC Short cable-CRV1																													
																				CRV Input Power Cable (Onsite assembled)										W156-Mid										L1 L3 G										L1 L3 G										283/7200										PMC40 to CRAC Mid cable -CRV2																													
										0411B76E										Internal DC&HMI power cables of the PMC40 (Factory assembled)										W018										TB9:11;12										HMI:DC+;DC-										67/1700										HMI power cable																													
																				PMC40 Internal communication cable (Factory assembled)										W203										PMC: SPD										4DJF:Door1/DI1										77/1950										Network cable from SPD port to 4DIF																													
																				PMC40 Internal communication cable (Factory assembled)										W205										PMC: Fan control										RDU501:DO1										69/1750										Network cable from emergency fan control port to RDU501																													
																				PMC40 Internal communication cable (Factory assembled)										W206										RS485+;RS485-										HMI-C;RDU501:COM2										34/850										Network cable from HMI to RDU501																													
C																				PMC40 Internal communication cable (Factory assembled)										W202										PMC: Red control										RDU501-DO2										75/1910										Network cable from controls the red light port to RDU501																													
																				PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)										W019										Rlight:DC+;Rlight:DC-										DC+;DC-										57/1450										PMC40 Rear door light power cable																													
																				PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)										W020										Flight:WH;RE;BK;BL										PMC-FLIGHT										69/1750										PMC40 Front door light power cable																													
																				PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)										W021										RSwitch:COM;NC										PMC_R-SW										59/1500										Rear door microswitch cable																													
																				PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)										W022										FSwitch:COM;NC										PMC_F-SW										67/1700										Front door microswitch cable																													
																				PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)										W023										Engency FAN:C13										PMC40:FAN;RACK FAN-R										48/1220										PMC40 emergency fan power cable																													
																				PMC40 Internal communication cable (Factory assembled)										W201										PMC: THD_RJ1										RDU501:Sensor 1										24/600										Network cable from PMC40 THD to RDU501																													
D																				PMC40 Internal communication cable (Factory assembled)										W204										PMC: Meter										RDU501:COM3										73/1850										PMU to RDU501 COM3 meter communication network cable																													
																				PMC40 Internal communication cable (Factory assembled)										W207										4DI:RJ1										RDU501:Sensor 2										14/350										Network cable from PMC40 4DJF to RDU501																													
										0411B76F										UPS protection control cable (Onside assembled)										W050										PMC:UPS1 contact										UPS1:EPO;3;1										48/1200										UPS1 protection control cable																													
																				UPS protection control cable (Onside assembled)										W051										PMC:UPS2 contact										UPS2:EPO;3;1										48/1200										UPS2 protection control cable																													
																				UPS protection control cable (Onside assembled)										W052										PMC:UPS3 contact										UPS3:EPO;3;1										48/1200										UPS3 protection control cable																													
E																				PMC40 Internal communication cable (Onsite assembled)										W251										UPS1:UNITY card										POE Switch(UPS1)										118/3000										Network cable from UPS1 to POE Switch																													
																				PMC40 Internal communication cable (Onsite assembled)										W252										UPS2:UNITY card										POE Switch(UPS2)										110/2800										Network cable from UPS2 to POE Switch																													
																				PMC40 Internal communication cable (Onsite assembled)										W253										UPS3:UNITY card										POE Switch(UPS3)										102/2600										Network cable from UPS3 to POE Switch																													
SHEET NO.										6 / 16										DRAWN BY: Nilesh Patil										© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED.VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, LEND, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.										DWG NO. SR2N04040PAB1										VERTIV™																																																	
CHANGE NO.																				APPROVED BY: Petr Harant										DATE (LATEST REV.) 01.09.2026										REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081																																																											
PAGE DESCRIPTION: 3.a - Cable overview										: =vRow+Power single line diagram-W152 - =vRow+Monitoring single line										Vertiv™ SmartRow™ 2: 4x IT Rack 40kW																																																																															



Cable overview


	0	1	2	3	4	5	6	7	8	9
Cable overview										
A	Packaging No.	Cable Category	Cable No.	Tag1	Tag2	Length (inch/mm)	Description			
	0411B76F	Network cable between the NVR and the switch (Onsite assembled)	W254	NVR	POE Switch(NVR)	47/1200	Network cable from NVR to POE Switch			
	0411B797	PMC40 Internal communication cable (Onsite assembled)	W250	RDU501:LAN2	POE Switch(RDU501)	59/1500	Network cable from RDU501 to POE Switch			
		CRV plenum department status collection & intelligent door lock communication cable (Onsite assembled)	W357	1-NO;2-NO;2-COM	385;1-COM	93/2350	CRV2 internal door status collection cable			
		CRV plenum department status collection & intelligent door lock communication cable (Onsite assembled)	W357	1-NO;2-NO;2-COM	385;1-COM	93/2350	CRV1 internal door status collection cable			
		CRV plenum department status collection & intelligent door lock communication cable (Onsite assembled)	W358	First LOCK(F);POE LOCK_RJ	Second LOCK;POE LOCK(F)	177/4500+67/1700	CRV1 internal intelligent POE door lock communication cable			
		CRV plenum department status collection & intelligent door lock communication cable (Onsite assembled)	W358	First LOCK(F);POE LOCK_RJ	Second LOCK;POE LOCK(F)	177/4500+67/1700	CRV2 internal intelligent POE door lock communication cable			
B	0411B798	POE Smart door lock Network cable (Onsite assembled)	W269	RACK1_POE LOCK	POE Switcher(RACK1)	99/2500	Network cable from Rack1 intelligent door lock to POE switch			
		POE Smart door lock Network cable (Onsite assembled)	W270	RACK2_POE LOCK	POE Switcher(RACK2)	126/3200	Network cable from Rack2 intelligent door lock to POE switch			
		POE Smart door lock Network cable (Onsite assembled)	W271	RACK3_POE LOCK	POE Switcher(RACK3)	165/4200	Network cable from Rack3 intelligent door lock to POE switch			
		POE Smart door lock Network cable (Onsite assembled)	W272	RACK4_POE LOCK	POE Switcher(RACK4)	193/4900	Network cable from Rack4 intelligent door lock to POE switch			
		Network cable between CRAC door status signal to RDU501 or 4DIF (Onsite assembled)	W261	385(CRAC1)	RDU501 : smoke1	177/4500	Network cable from CRAC_1 door status port to RDU501			
C		POE Smart door lock Network cable (Onsite assembled)	W277	CRAC_POE LOCK	POE Switcher(CRAC1)	126/3200	Network cable from CRV1 intelligent door lock to POE switch			
		Network cable between CRAC door status signal to RDU501 or 4DIF (Onsite assembled)	W262	385(CRAC2)	RDU501 : smoke2	236/6000	Network cable from CRAC_2 door status port to RDU501			
		POE Smart door lock Network cable (Onsite assembled)	W278	CRAC_POE LOCK	POE Switcher(CRAC2)	197/5000	Network cable from CRV2 intelligent door lock to POE switch			
		Network cable between the PDU and POE switch (Onsite assembled)	W264	PDU	POE Switch(PDU)	137.8/3500	Network cable from PDU to POE Switch			
		Network cable between the PDU and PDU (Onsite assembled)	W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack1			
		Network cable between the PDU and PDU (Onsite assembled)	W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack1/2			
		Network cable between the PDU and PDU (Onsite assembled)	W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack2			
D		Network cable between the PDU and PDU (Onsite assembled)	W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack2/3			
		Network cable between the PDU and PDU (Onsite assembled)	W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack3			
		Network cable between the PDU and PDU (Onsite assembled)	W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack3/4			
		Network cable between the PDU and PDU (Onsite assembled)	W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack4			
		POE Smart door lock Network cable (Onsite assembled)	W268	PMC40_POE LOCK	POE Switcher(PMC40)	36/900	Network cable from PMC40 intelligent door lock to POE switch			
		Network cable between the CRAC and the switch (Onsite assembled)	W255	CRV1	POE Switch(CRV1)	197/5000	Network cable from CRV1 to POE Switch			
		Network cable between the Water Leak and the switch or 4DIF (Onsite assembled)	W258	Water Leak1	RDU501:DI1	197/5000	Network cable from Water Leak1 to RDU501			
E		Network cable between the CRAC and the switch (Onsite assembled)	W256	CRV2	POE Switch(CRV2)	256/6500	Network cable from CRV2 to POE Switch			
		Network cable between the Water Leak and the switch or 4DIF (Onsite assembled)	W259	Water Leak2	RDU501:DI2	256/6500	Network cable from Water Leak2 to RDU501			
SHEET NO. 7 / 16			DRAWN BY: Nileshe Patil		DWG NO. SR2N04040PAB1			VERTIV™		
CHANGE NO.			APPROVED BY: Petr Harant		DATE (LATEST REV.) 01.09.2026			REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081		
PAGE DESCRIPTION: 3.b - Cable overview : =vRow+Monitoring single line diagram -W254 - =vRow+1CRV2-W259			Vertiv™ SmartRow™ 2: 4x IT Rack 40kW							



Cable overview

0											1											2											3											4											5											6											7											8											9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	

CRVs(CRD30)-SR2 for 40K (4*ITrack)

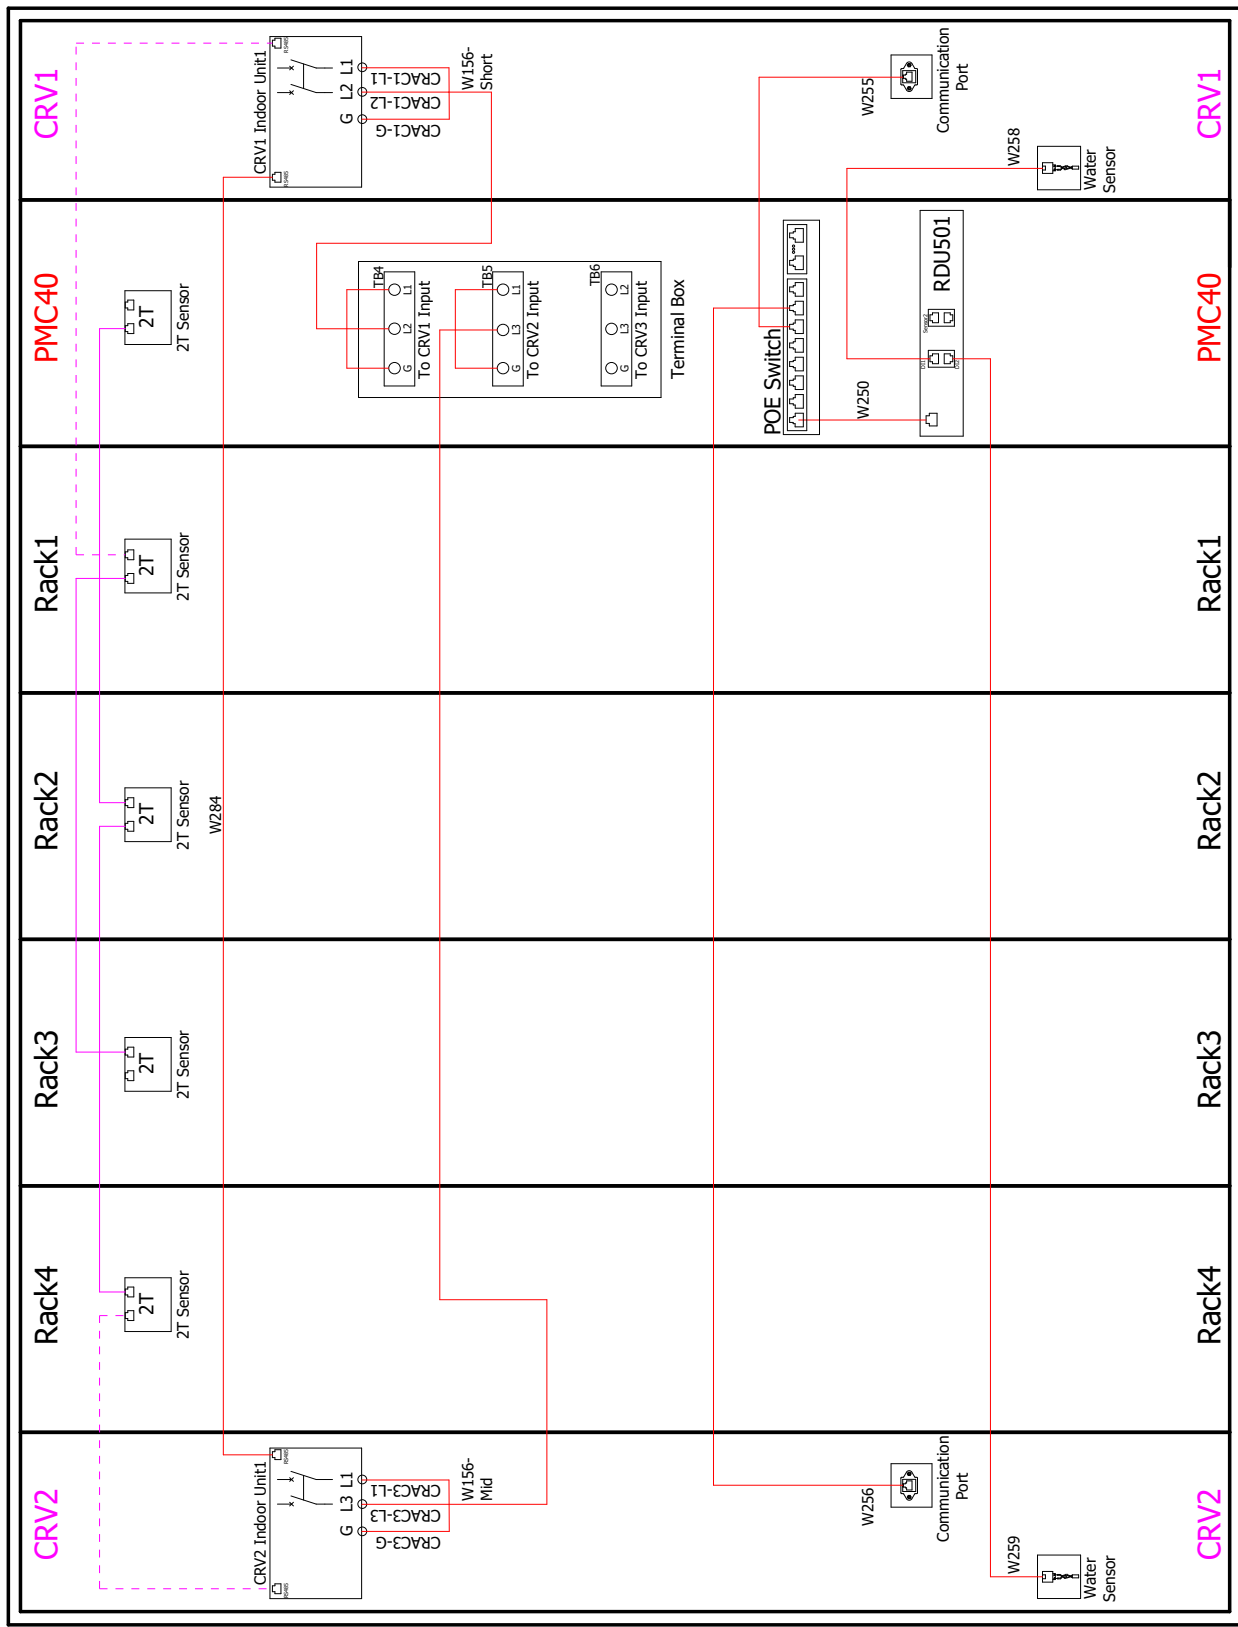


Rear View

—	Factory connected cables
—	Cables connected at assembly
—	300157G2 (10 ft)
—	300157G1 (6 ft)

PAGE DESCRIPTION: 4.a - Air conditioner wiring diagram		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 4x IT Rack 40kW	
DRAWN BY: Nilesh Patil		DWG NO. SR2N04040PAB1	
APPROVED BY: Petr Harant		DATE (LATEST REV.) 01.09.2026	
CHANGE NO.		REVISION:	
		505 N. CLEVELAND AVE WESTERVILLE OH 43081	
SHEET NO. 10 / 16			
		VERTIV™	
© 2020 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION THEREIN SEPARATELY, CONFIDENTIAL AND WILL NOT DISCLOSE OR REPRODUCE IT IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. ALL LEADS OR SERVICE REQUESTS MUST BE SUBMITTED TO VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.			

POE Locks -SR2 for 40K (4*ITRack)

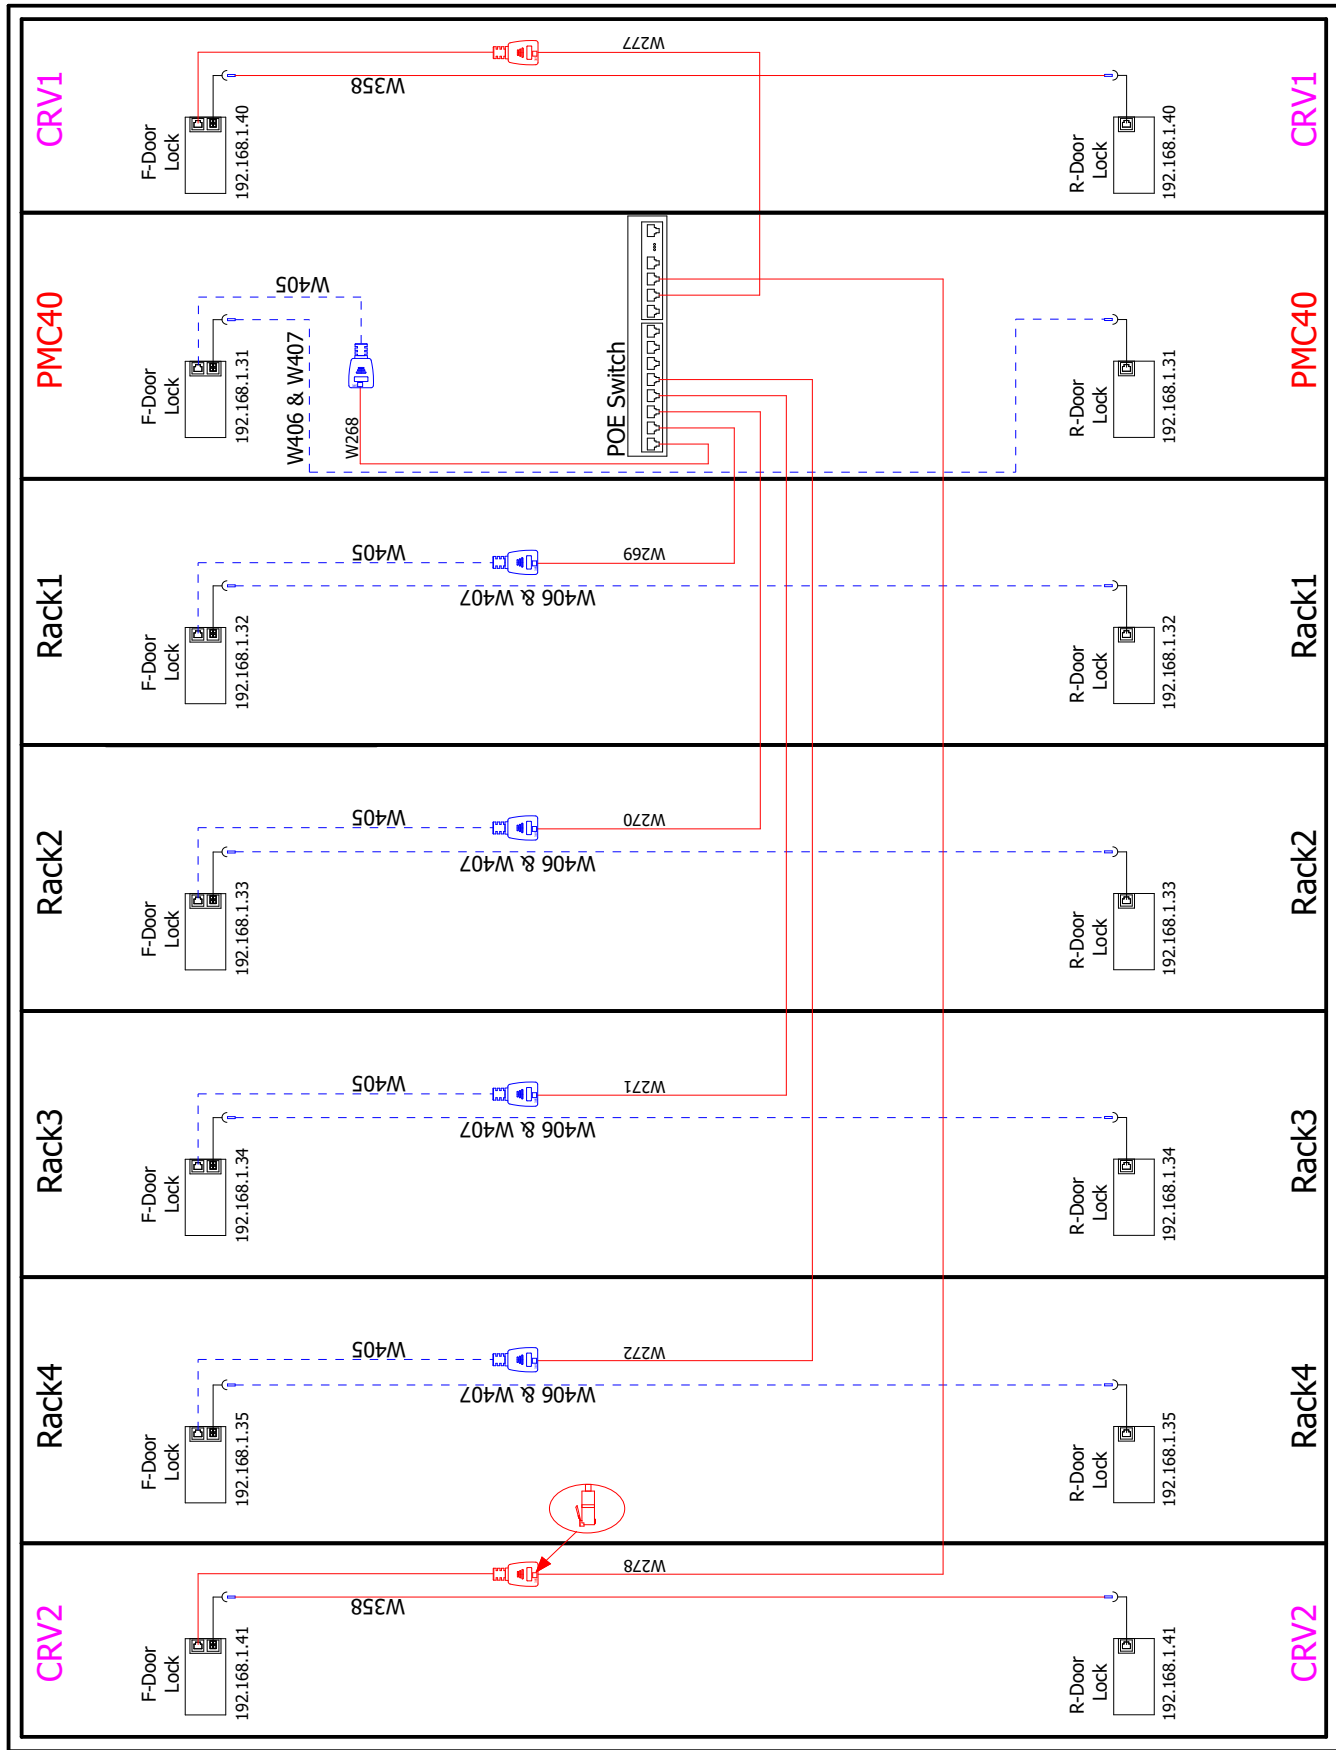


Rear View

Factory connected cables
Cables connected at assembly

PAGE DESCRIPTION: 4.b - Intelligent lock wiring diagram		APPROVED BY: Petr Harant		DRAWN BY: Nilesh Patil		SHEET NO. 11 / 16	
CHANGE NO.		DATE (LATEST REV.) 01.09.2026		DWG NO. SR2N04040PAB1		© 2020 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION AND THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, REUSE (EXCEPT SOLELY FOR THE BENEFIT OF VERTIV GROUP CORPORATION), SELL, LEND, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.	
TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 4x IT Rack 40kW		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081		VERTIV™			


LED & Micro Switch -SR2 for 40K (4*ITRack)

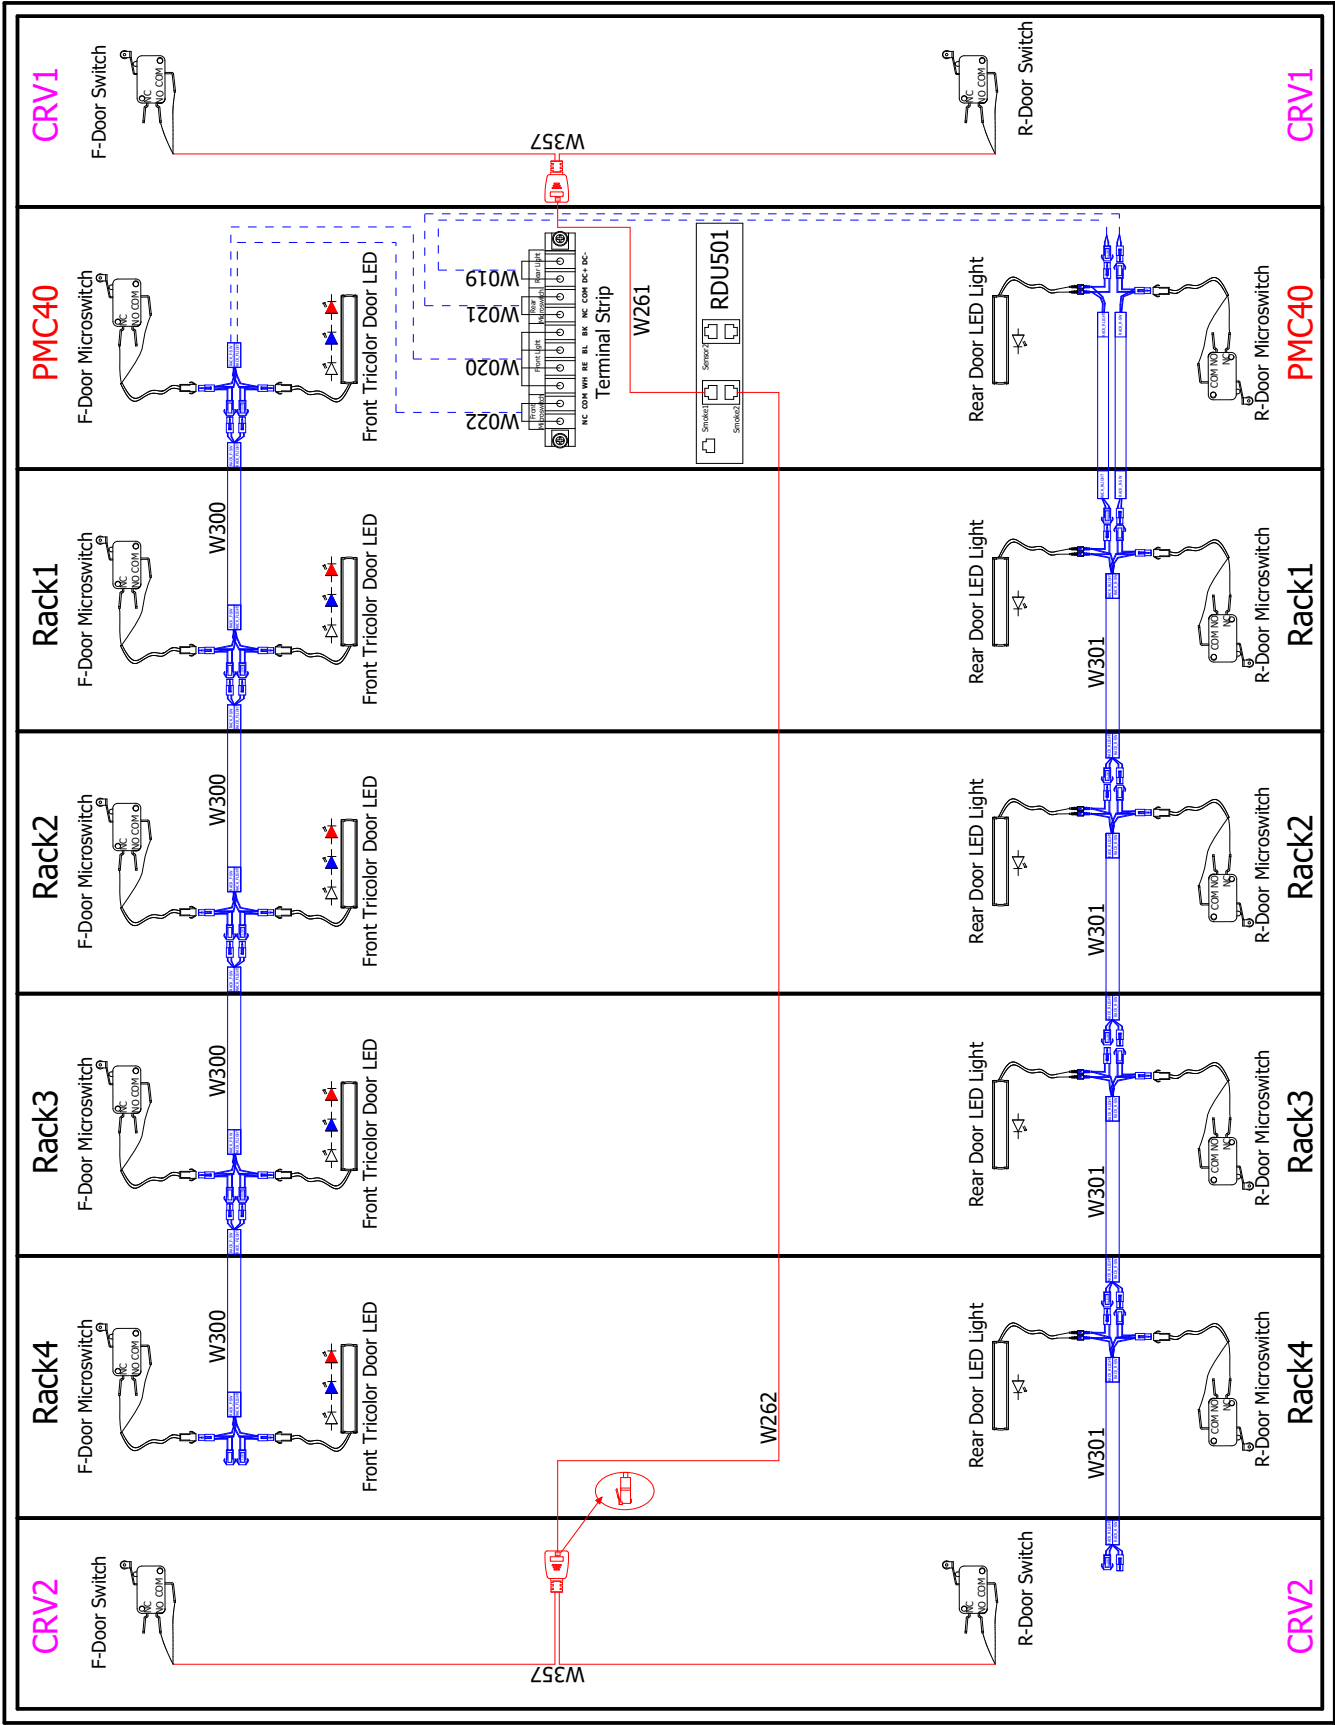

Rear View

----- Factory connected cables
----- Cables connected at assembly

SHEET NO.		12 / 16		DRAWN BY:		Nilesh Patil		DWG NO.		SR2N04040PAB1		 VERTIV™											
CHANGE NO.				APPROVED BY:		Petr Harant		DATE (LATEST REV.)		01.09.2026													
PAGE DESCRIPTION:		4.c - LED&Micro Switch wiring diagram						REVISION:		505 N. CLEVELAND AVE WESTERVILLE OH 43081													
TITLE / DESCRIPTION:												Vertiv™ SmartRow™ 2: 4x IT Rack 40kW											
© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND INFORMATION CONFIDENTIAL AND PROPRIETARY AND WILL NOT REPRODUCE, COPIY, OR DISCLOSE IT TO ANY OTHER PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.																							

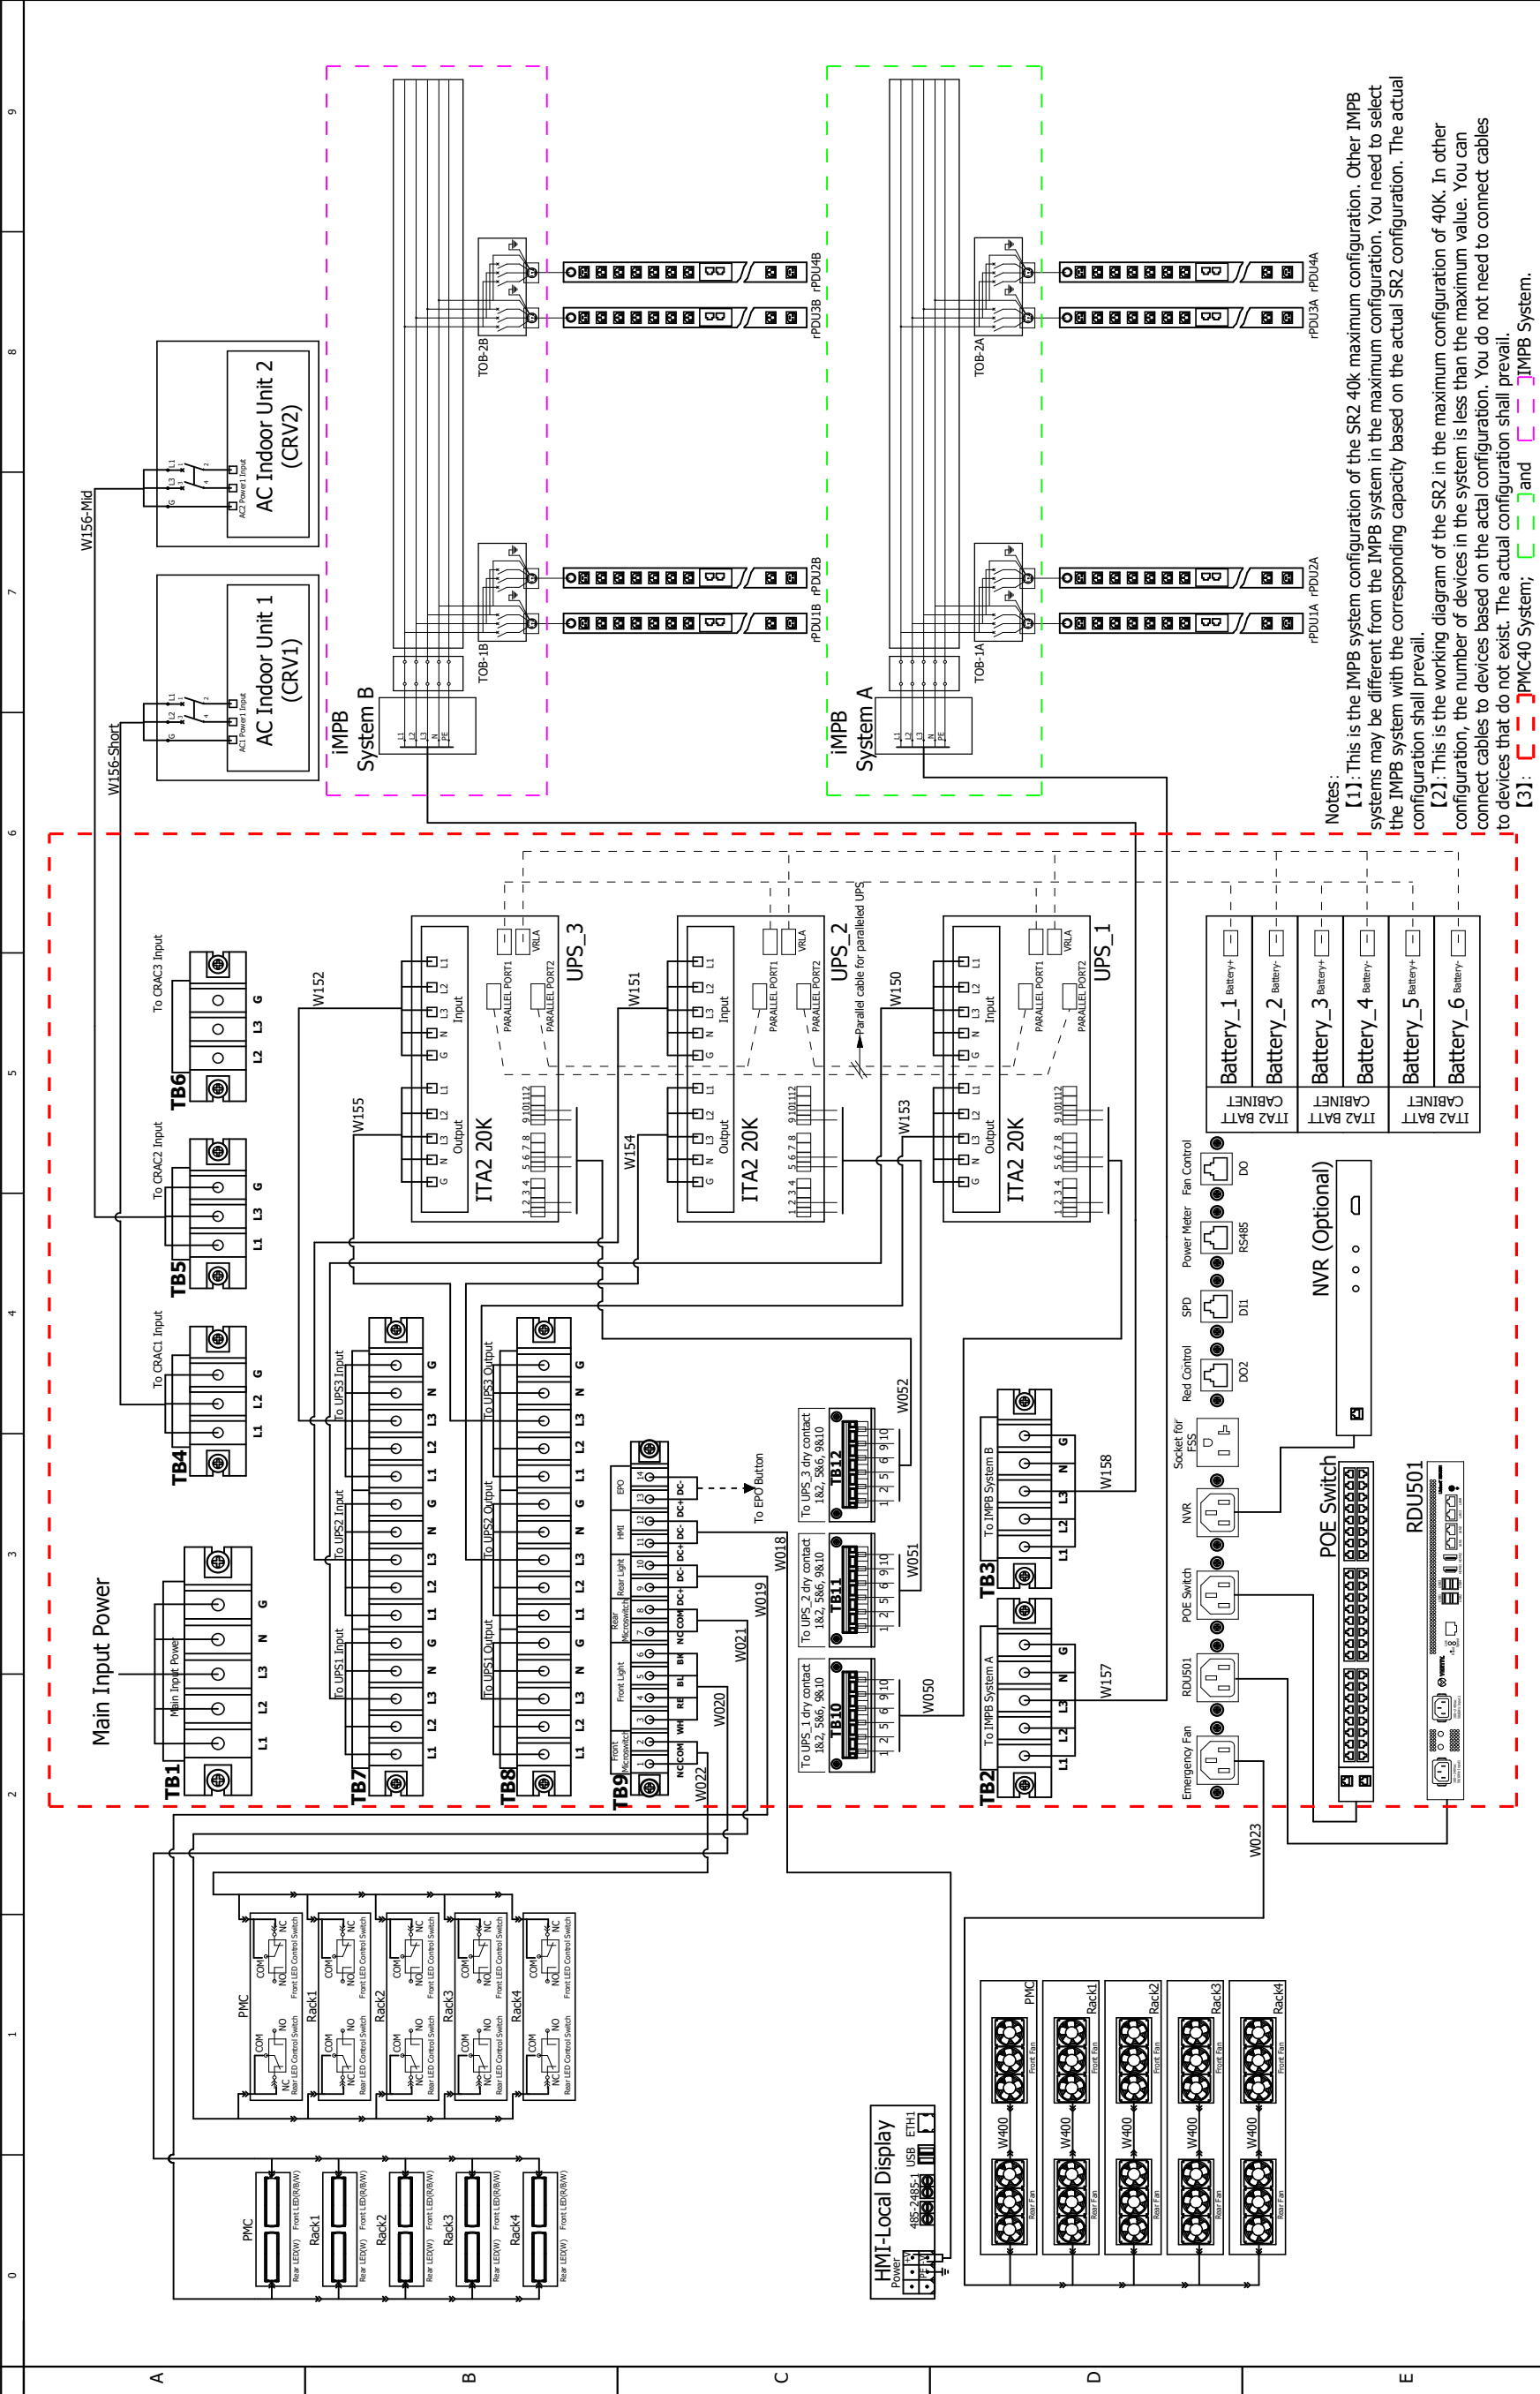

Notes:

[1]: This is the IMPB system configuration of the SR2 40k maximum configuration. Other IMPB systems may be different from the IMPB system in the maximum configuration. You need to select the IMPB system with the corresponding capacity based on the actual SR2 configuration. The actual configuration shall prevail.

[2]: This is the working diagram of the SR2 in the maximum configuration of 40K. In other configuration, the number of devices in the system is less than the maximum value. You can connect cables to devices based on the actual configuration. You do not need to connect cables to devices that do not exist. The actual configuration shall prevail.

[3]: --- PMC40 System; --- and --- IMPB System.

SHEET NO. 14 / 16		DRAWN BY: Nilesh Patil		© 2020 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) IS THE PROPERTY OF VERTIV GROUP CORPORATION. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND PROPRIETARY, AND WILL NOT DISCLOSE OR REPRODUCE IT OR ANY PART THEREOF WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. IF YOU ARE NOT AN EMPLOYEE OR AGENT OF VERTIV GROUP CORPORATION, YOU AGREE TO SIGN AND SUBMIT TO VERTIV GROUP CORPORATION A NON-DISCLOSURE AND PROPRIETARY INFORMATION AGREEMENT. IF YOU ARE AN EMPLOYEE OR AGENT OF VERTIV GROUP CORPORATION, YOU AGREE TO SIGN AND SUBMIT TO VERTIV GROUP CORPORATION A PROPRIETARY INFORMATION AGREEMENT. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.	
CHANGE NO.		APPROVED BY: Petr Harant			
PAGE DESCRIPTION: 5 - 40k Power single line diagram				TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 4x IT Rack 40kW	
				DWG NO. SR2N04040PAB1	
				DATE (LATEST REV.) 01.09.2026	
				REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081	
				 VERTIV™	



4. Field Supplied Cable & Part List

</

Net weight: 150 kg
Shipping weight: 260 kg

VERTIV

MSR2-NR6P

DATE: (LATEST REV.)

REVISION: 505 N. CLEVELAND AVE. WESTERVILLE, OHIO 43082

1. ALL DIMENSIONS ARE IN INCHES (MM)

2. FRONT AND REAR DOOR WITH THE GLASS AND INTELLIGENT LOCKS.

3. SWING RADIUS OF 120° (FRONT AND REAR DOORS).

4. EACH RACK HAS FOUR FEET BOLT AND ROLL WHEELS.

5. ON THE BOTTOM FRONT DOOR SIDE, THERE IS A EMERGENCE FAN UNIT(3 FANS); ON THE TOP OF REAR DOOR SIDE, THERE IS A EMERGENCE FAN UNIT(3 FANS).

6. ON THE TOP FRONT FRAME SIDE, THERE IS A TRI-COLOR LED AND MICRO SWITCH; ON THE TOP REAR FRAME SIDE, THERE IS A WHITE COLOR LED AND MICRO SWITCH.

1 OF 1



DESIGNED BY:

APPROVED BY:

FORM NO. DPN004659 REV - A

The drawing includes four views of the server rack: Top View, Front View, Rear View, and Front Side View. The Top View shows the top of the rack with dimensions 34.9 (887.1) for width and 20.2 (512.6) for depth. It features a 120° swing radius for the front door, a 20° POE lock, and a 4" x 4" fan outlet. The Front View shows the front of the rack with dimensions 78.7 (1997.9) for width and 20.9 (530.0) for depth. It includes a glass door, a POE lock, an emergency fan inlet, a 4" foot bolt, and 4" roll wheels. The Rear View shows the rear of the rack with dimensions 49.7 (1263.0) for width and 55.1 (1400.0) for depth. It includes a glass door, a POE lock, and a 4" foot bolt. The Front Side View shows the side of the rack with dimensions 41.5 (1054.3) for width and 23.6 (600.0) for depth. It includes a glass door, a POE lock, an emergency fan inlet, a 4" foot bolt, and 4" roll wheels.

6. Power Management Cabinet - 40kW (PMC40)

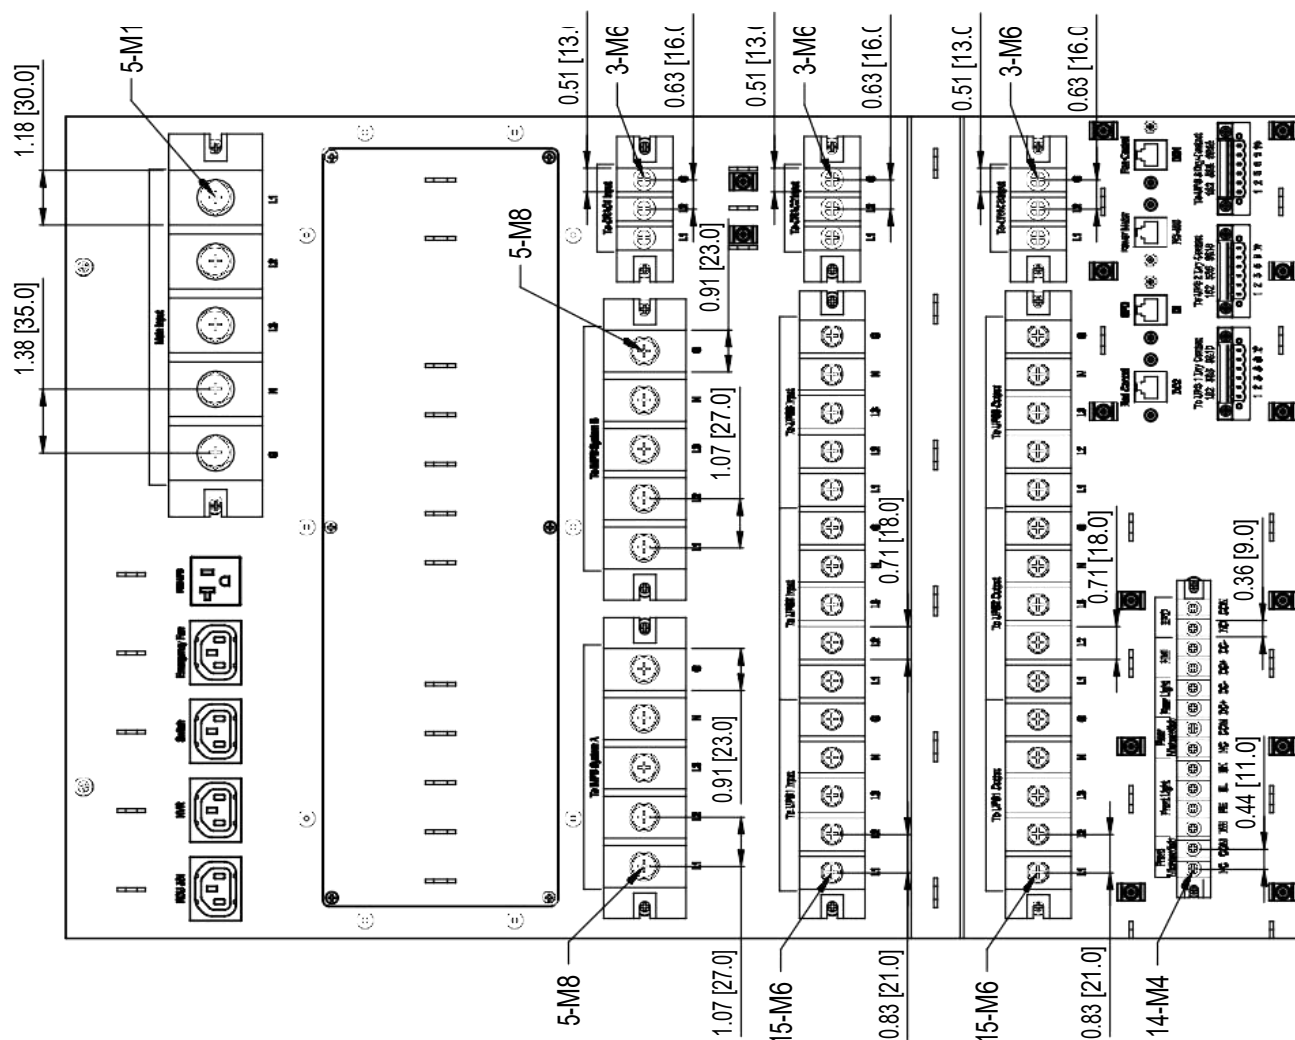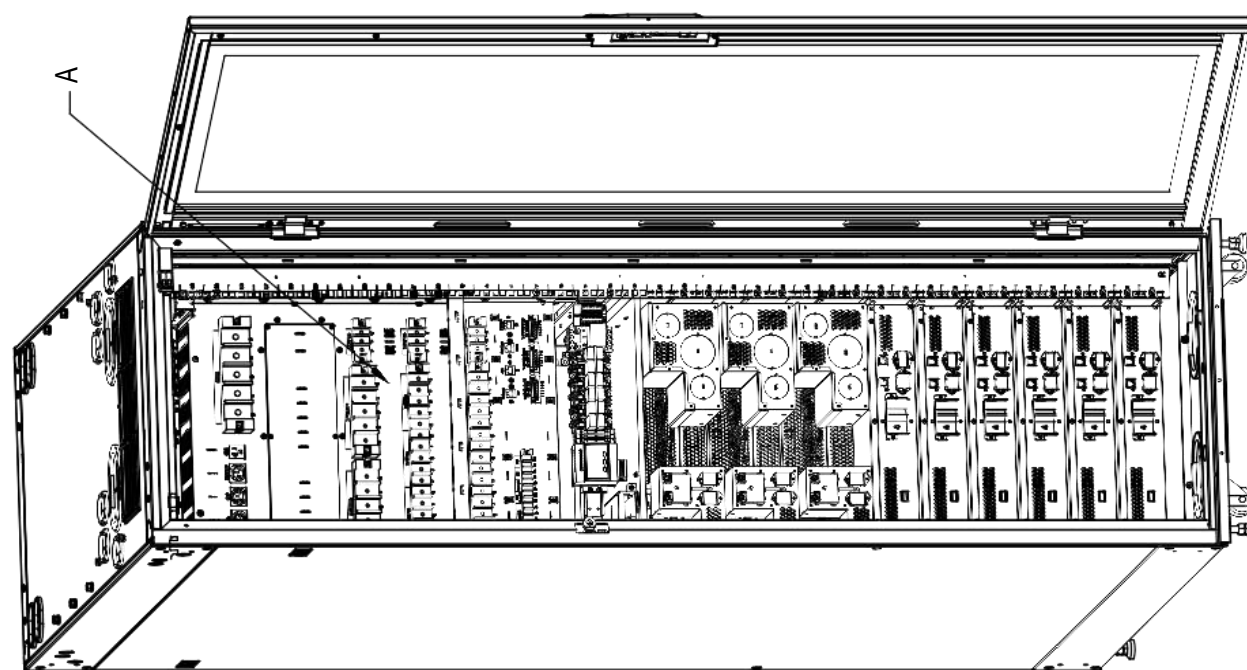


PMC40


Detail A
(PMC40 terminal blocks size)

III RI		FORM 8*	THIS DRAWING IS THE PROPERTY OF VERTIV INC. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREON. NO PART OF THIS DRAWING IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM VERTIV INC. VERTIV INC., 505 N. CLEVELAND AVE., WESTERVILLE, OHIO 43082	DATE PMD-40 REV. LATEST REVJ	PROJECT NAME PMD-40
I OF 1	Bruce			REVISIONS	SHEET NUMBER 505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082
II		BRUCE BY:			
-					
DWG		APPROVED BY:			
-					


8. Plenum CRD30

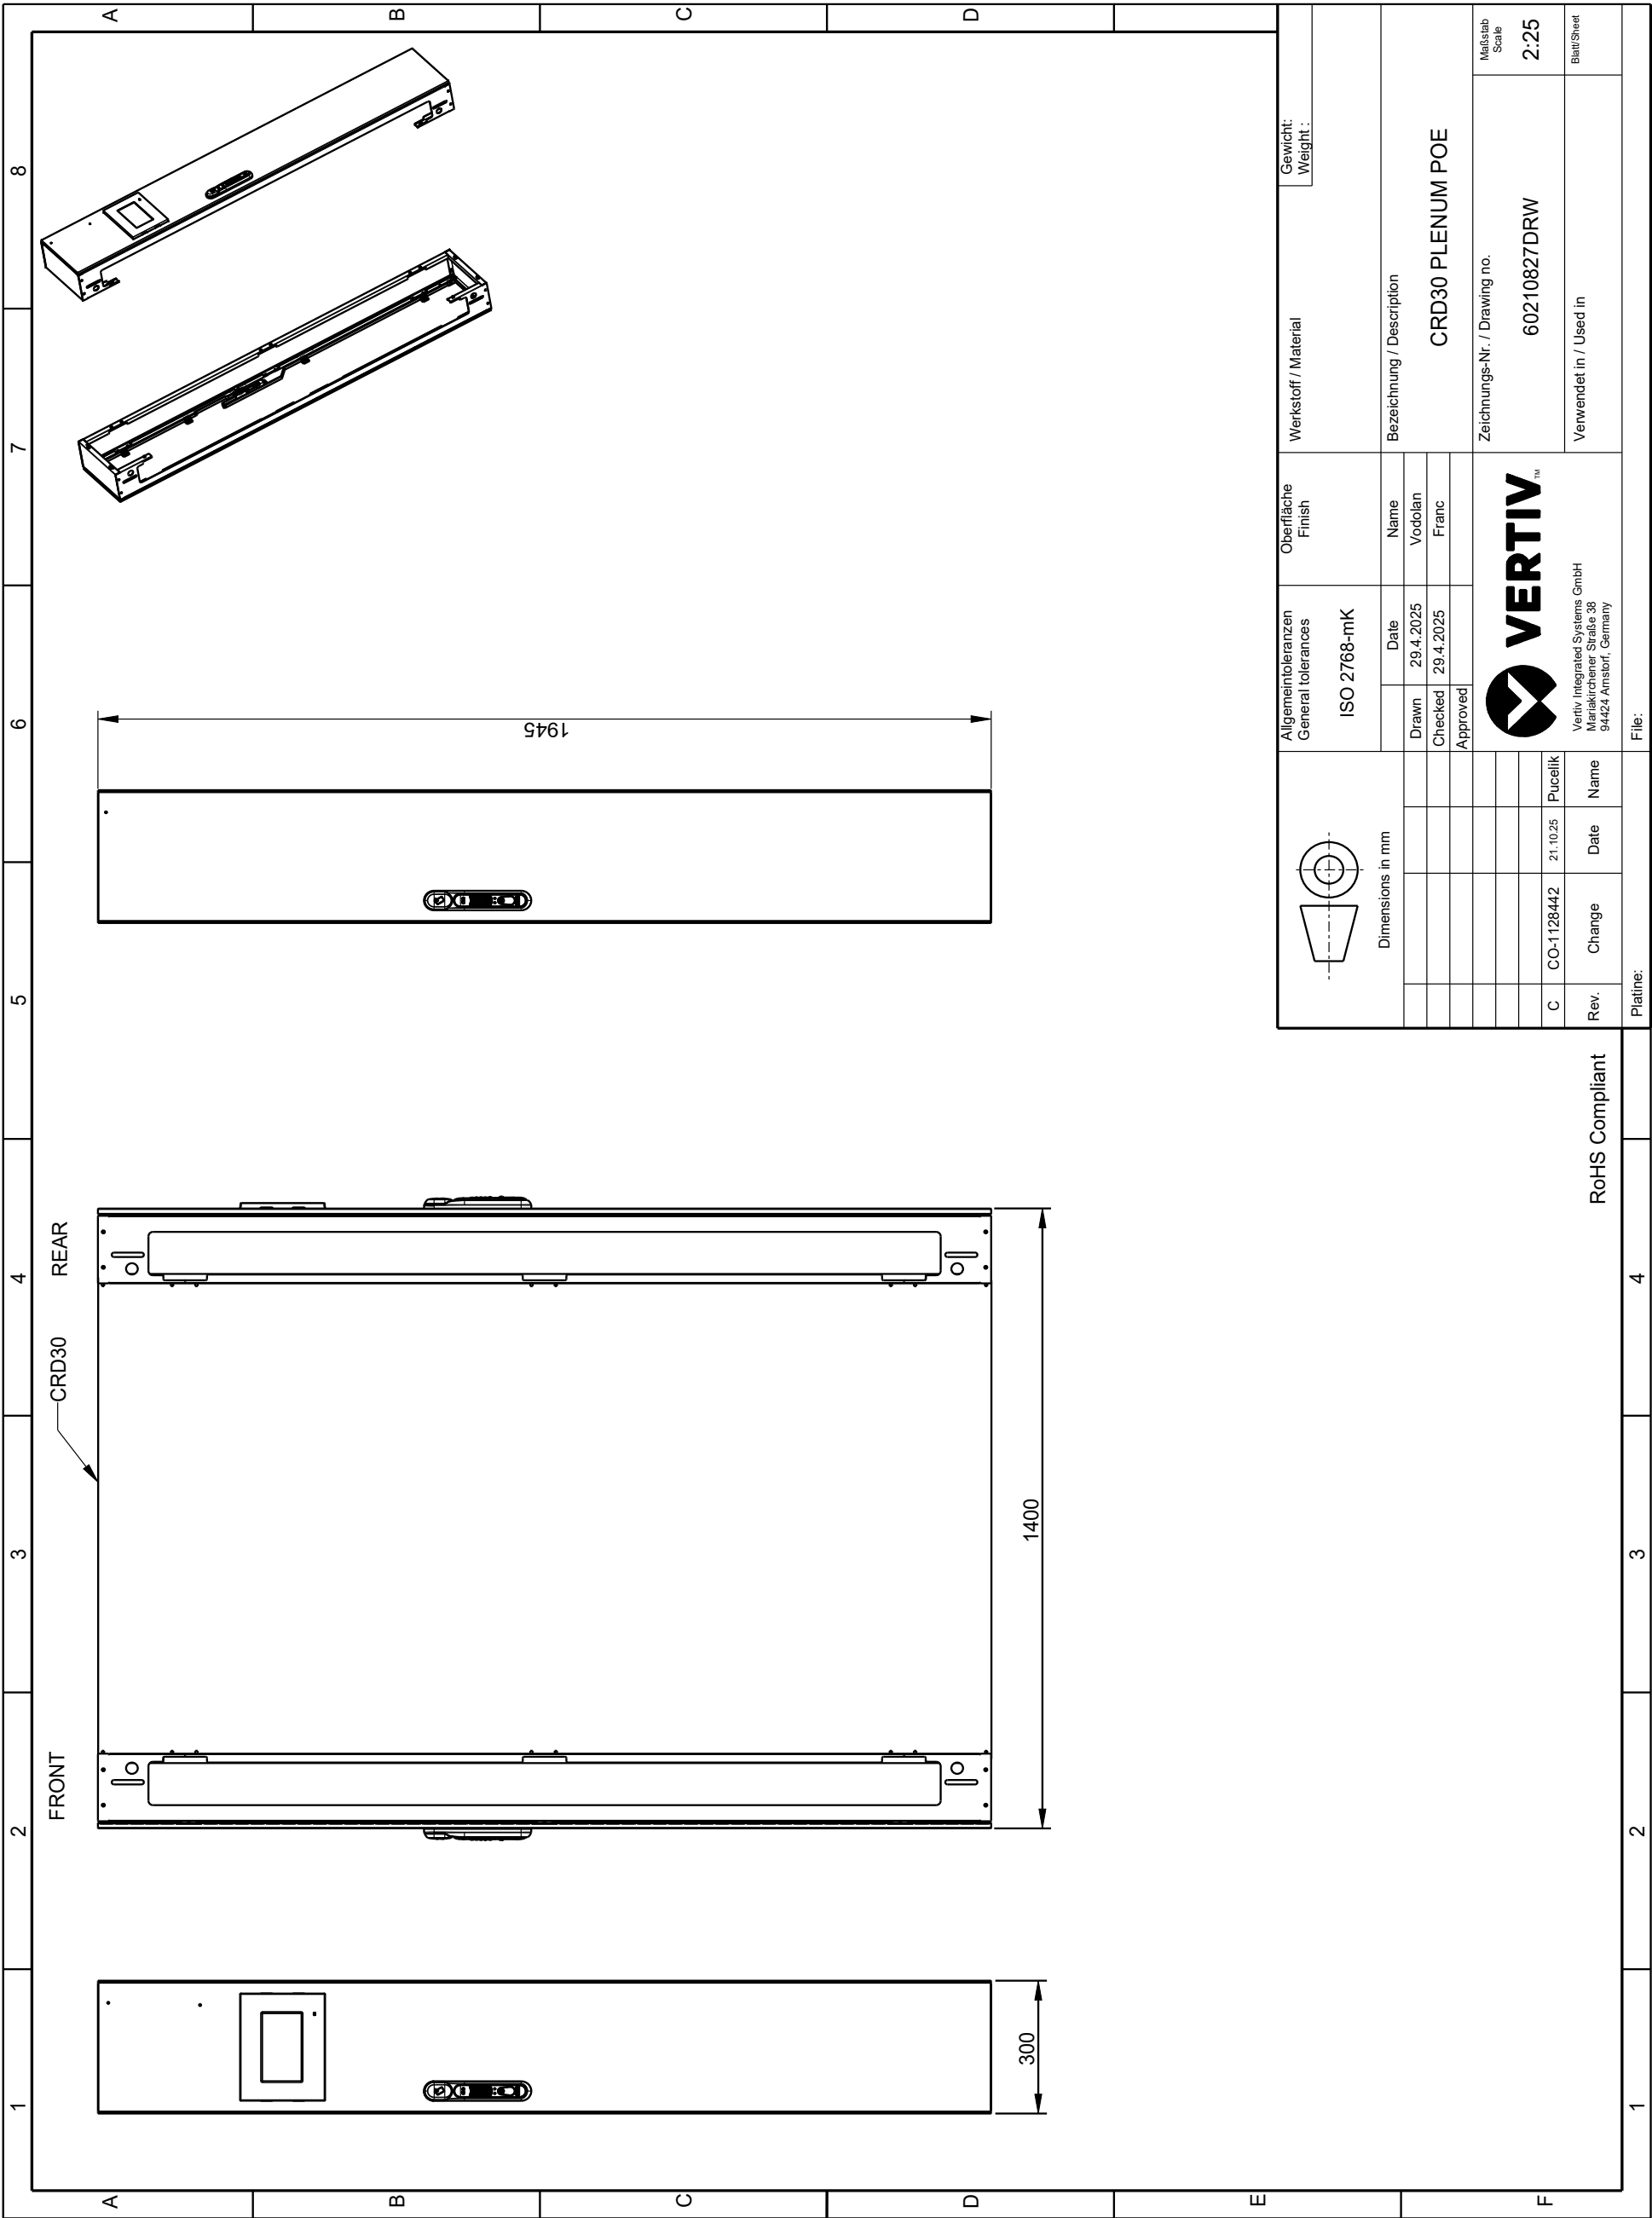


9. IMPB 4 BAR (T-IMPB-6.00-250-TPN-B-C1SKU)

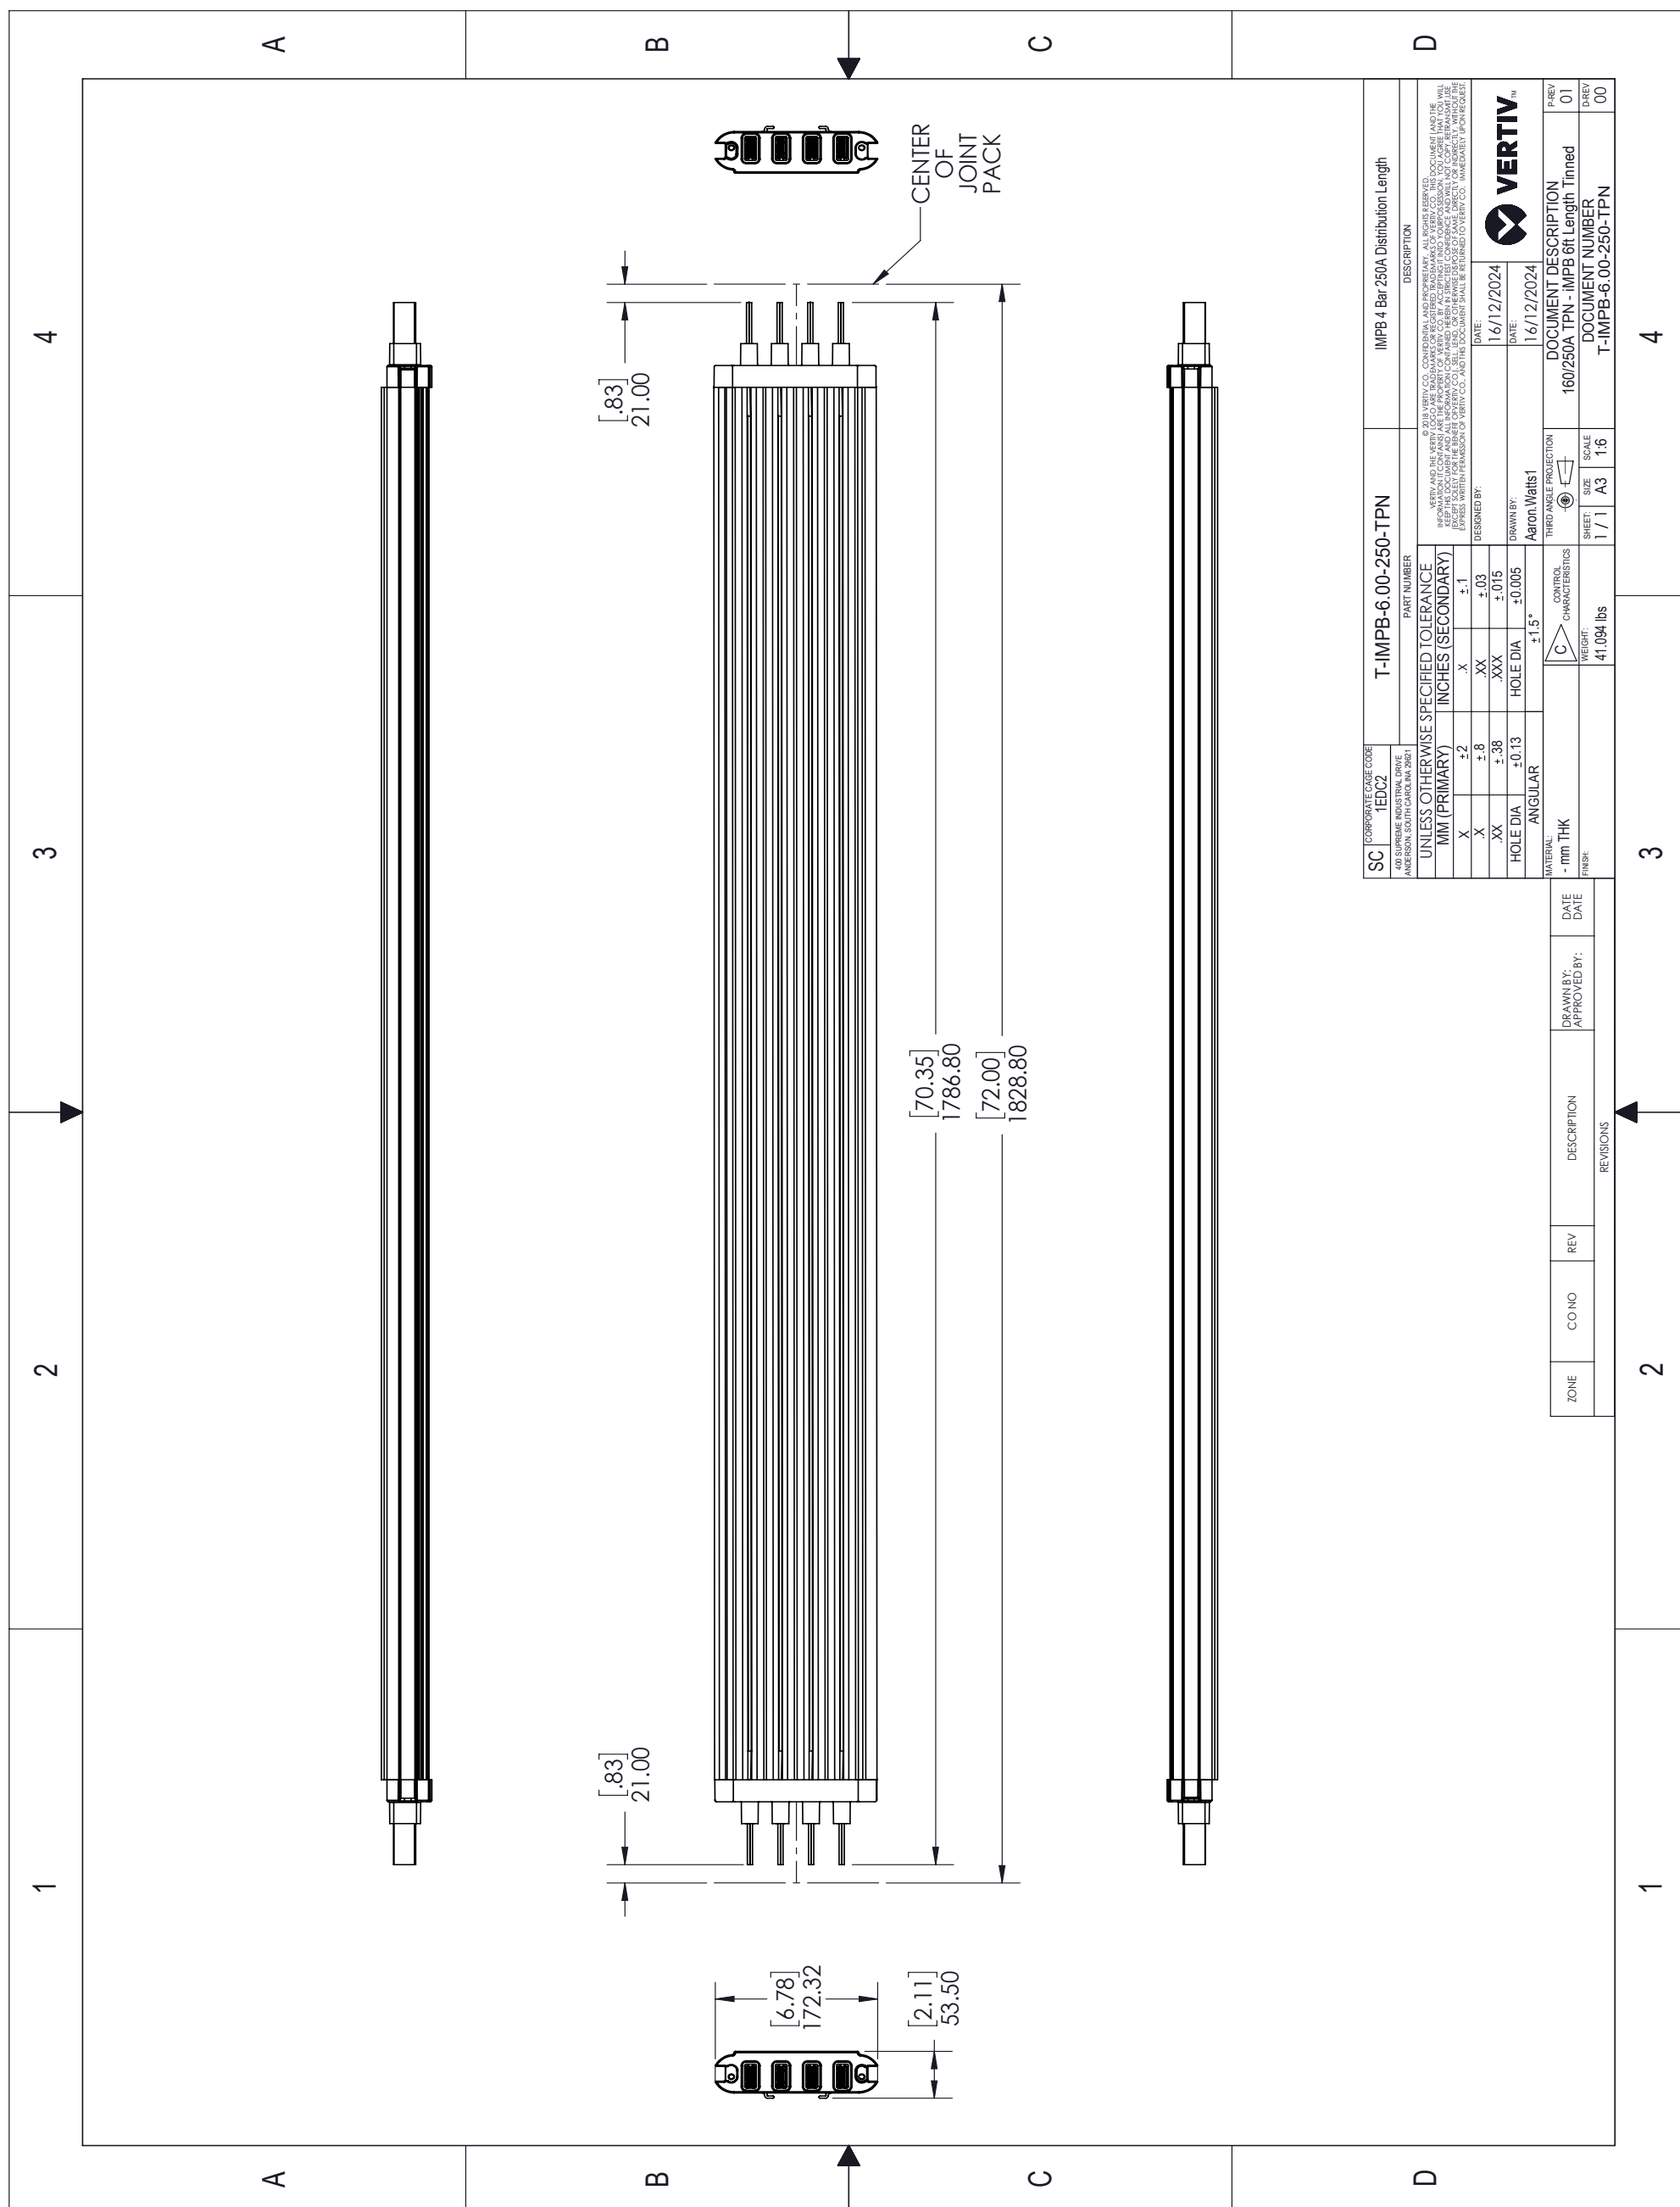

10. JOINT PACK (T-IMPB-JP-250-TPN-BE)

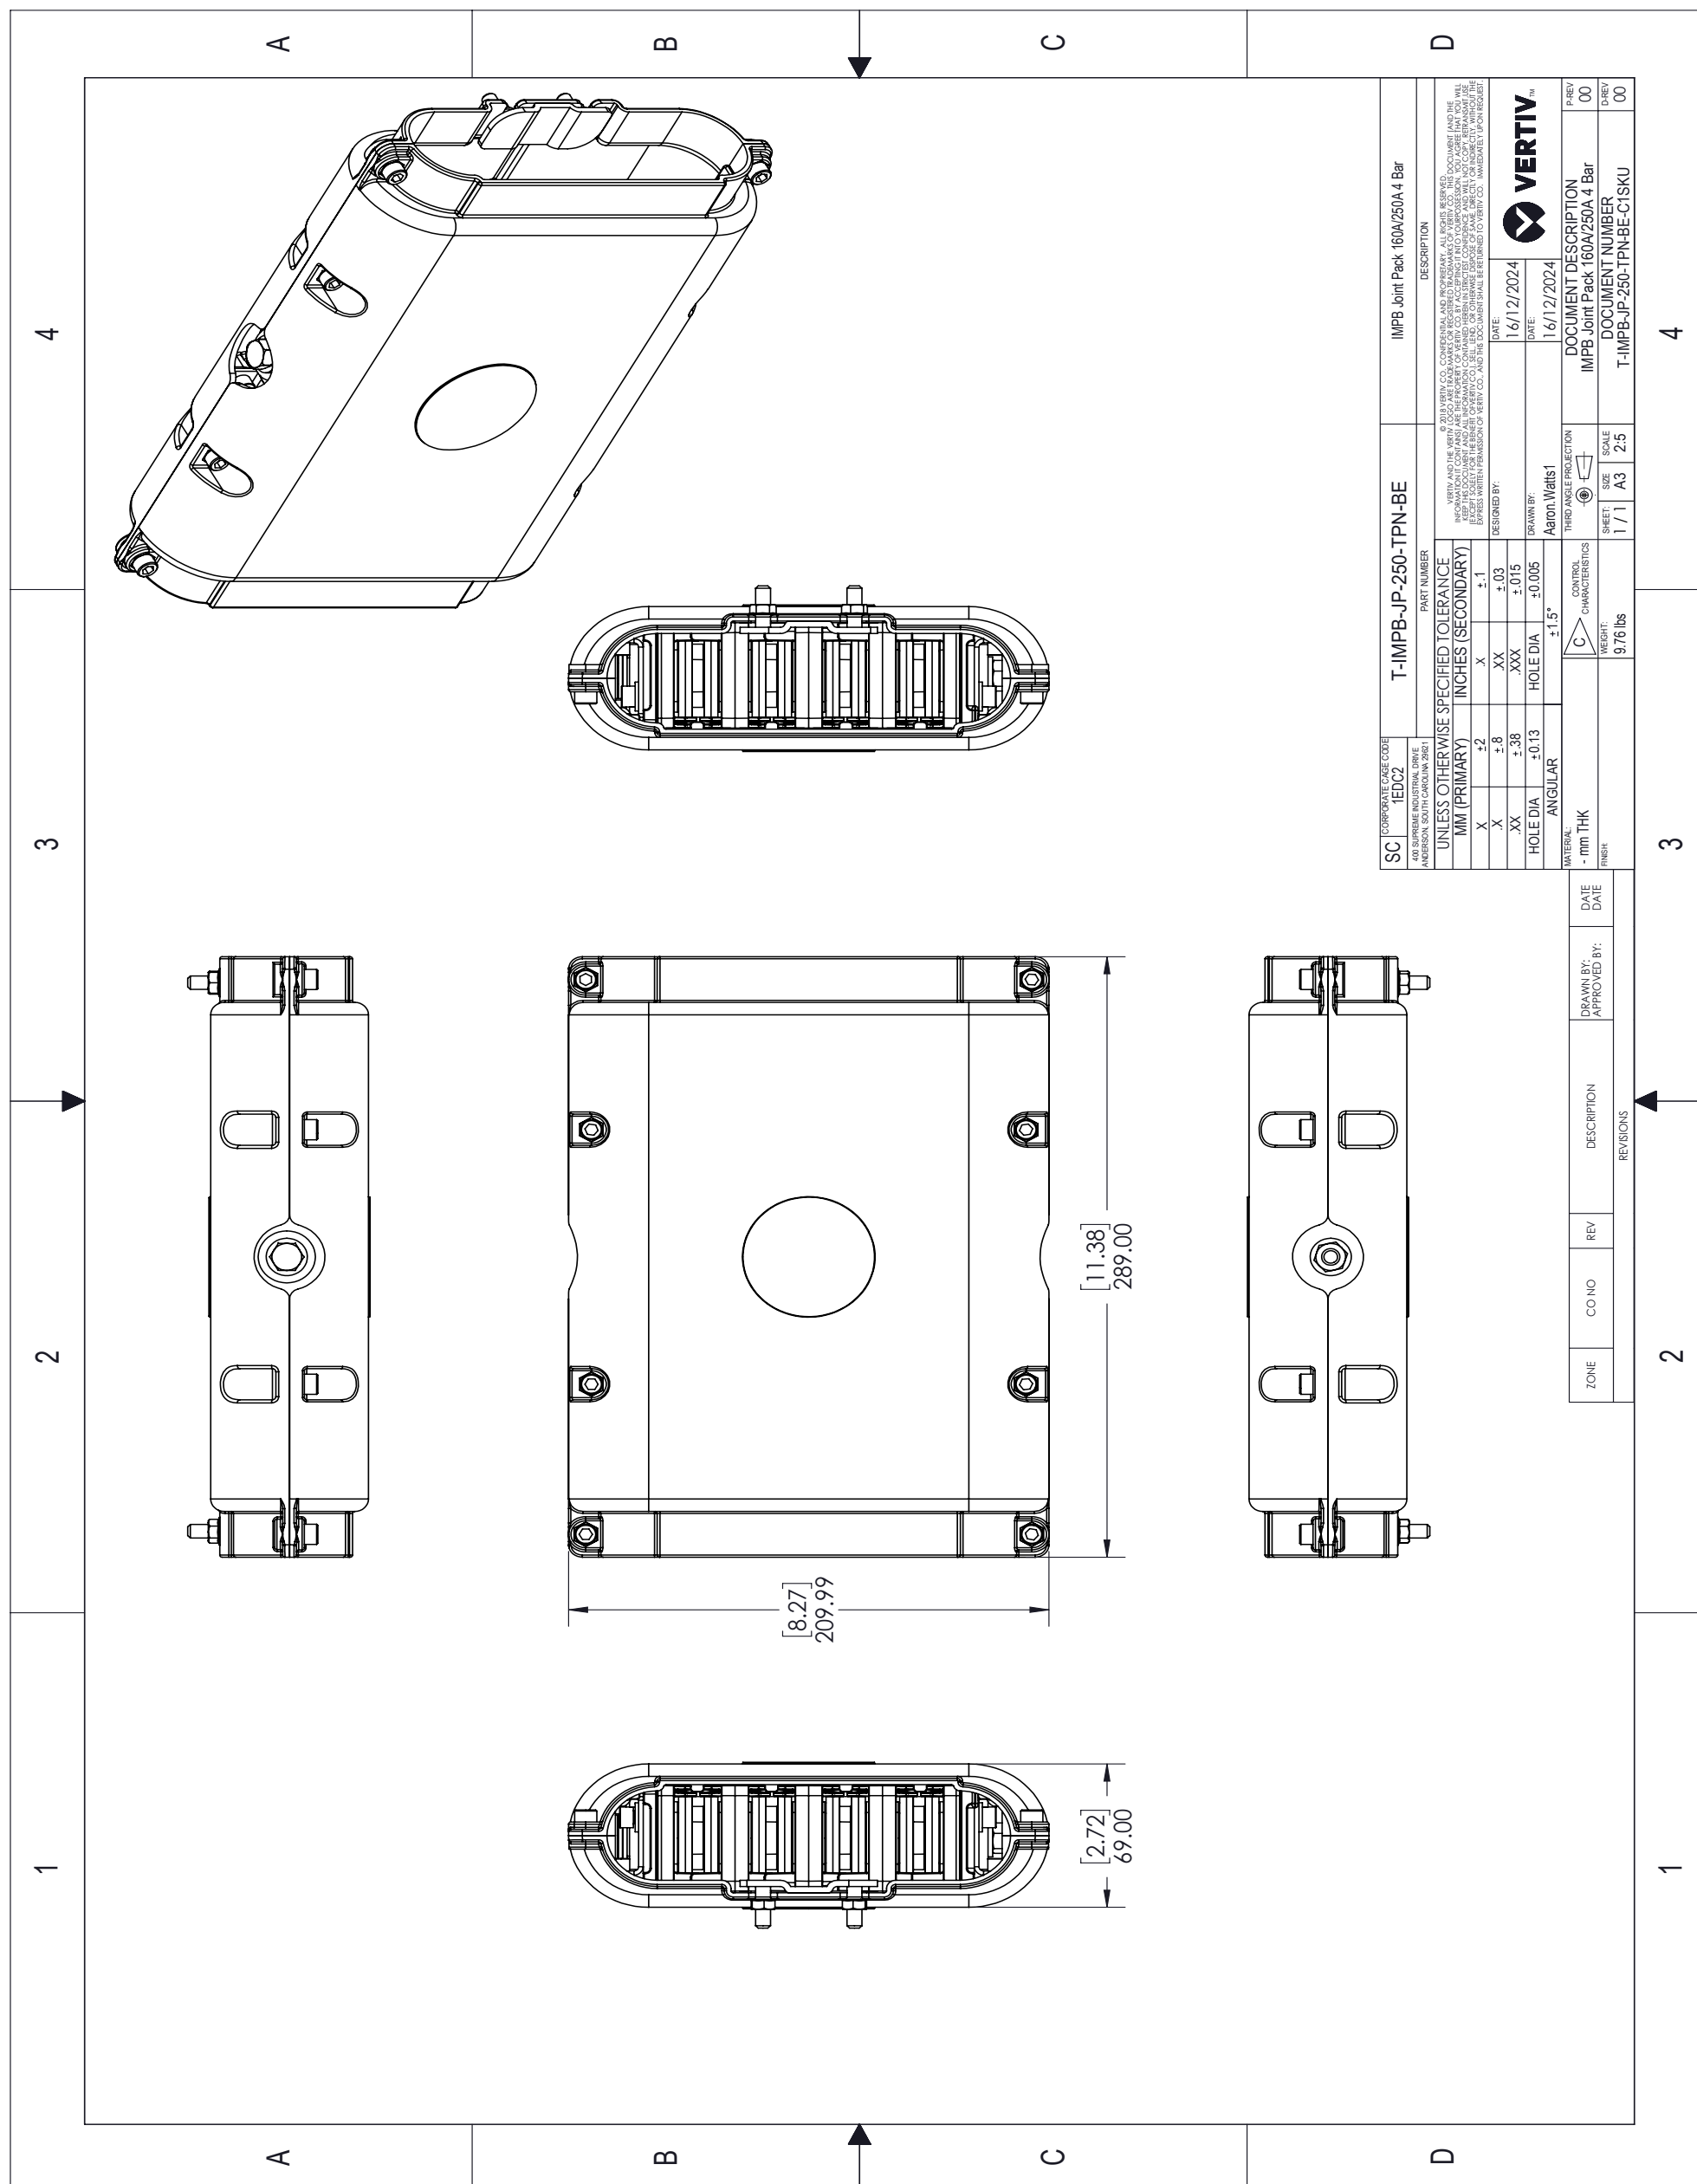

11. END CAP (IMPB-EC-4B-S)

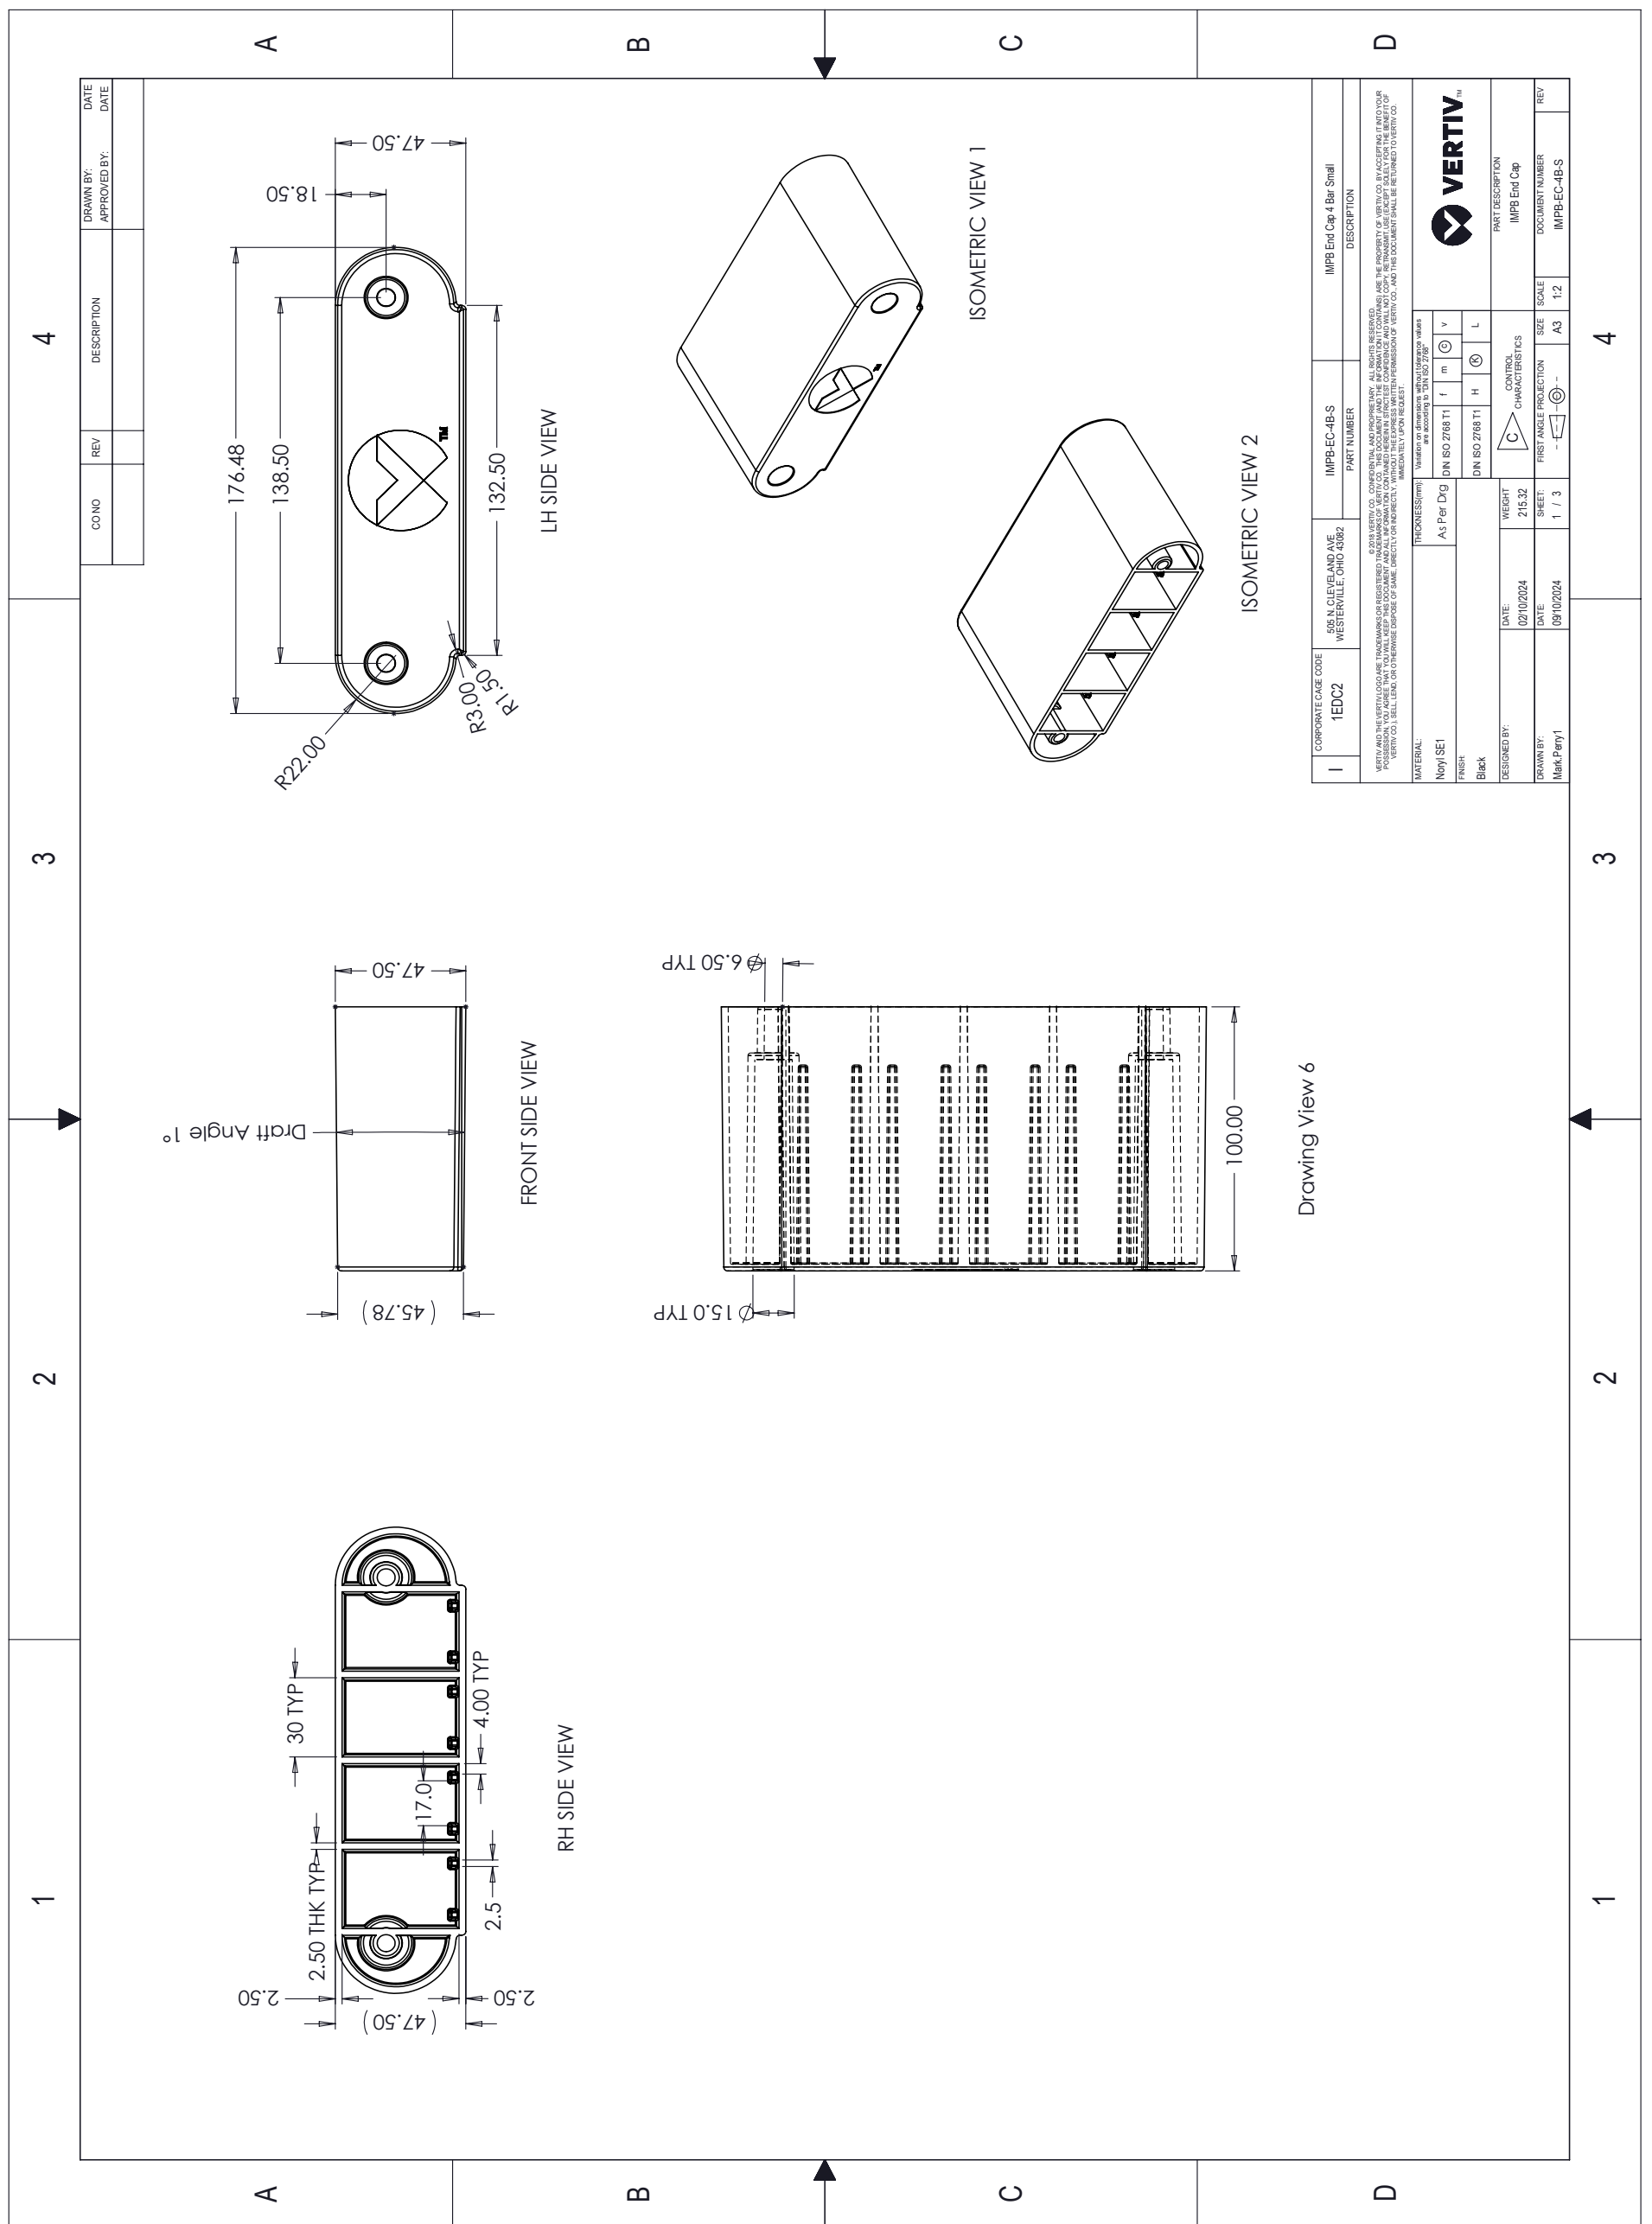

1 2 3 4

A B C D

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	IMPB-RMB-001-2	Rack Mounting Bracket - Top Hat Base	1
2	IMPB-RMB-002-2	Rack Mounting Bracket - Busbar Mounting Plate	2
3	IMPB-HB13	IMPB Vertical Fixing Bracket HB13	4

M10x20 HH BOLT + M10 NUT (QTY 4)

M6x10 HH BOLT + M6 DOME WASHER (QTY 10)

89.00
3.50
226.98
8.94


400.00
15.75
372.00
14.64

ZONE	CO NO	REV	DESCRIPTION	DRAWN BY: APPROVED BY:	DATE DATE
1	2	3	4		

SC	CORPORATE CODE	1EDC2	PART NUMBER	IMPB Roof Mounted Brackets c/w HB13 Hanging Brackets
UNLESS OTHERWISE SPECIFIED TOLERANCE INCHES (SECONDARY)				
X	±.2	XX	±.03	±.1
XX	±.38	XXX	±.015	±.005
HOLE DIA	±.013	HOLE DIA	±.005	±.15°
ANGULAR				
MATERIAL: SEE DETAILS - mm THK				
FRSH	xxx	WEIGHT: 7.750/lbs	CONTROL CHARACTERISTICS	THIRD ANGLE PROJECTION
DRAWN BY: Aaron, Watts1				
DATE: 16/12/2024				
DATE: 16/12/2024				
DESIGNED BY:				
VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OF VERTIV CO. THIS DOCUMENT (AND THE INFORMATION CONTAINED HEREIN) IS UNCLASSIFIED AND NOT FOR DISTRIBUTION OUTSIDE THE VERTIV COMPANY. VERTIV CO. SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE INFORMATION CONTAINED HEREIN. VERTIV CO. SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE INFORMATION CONTAINED HEREIN. VERTIV CO. SHALL BE RESPONSIBLE FOR THE PROTECTION OF THE INFORMATION CONTAINED HEREIN.				
VERTIV				
DOCUMENT DESCRIPTION				
IMPB Roof Mounted Brackets c/w HB13 Hanging Brackets				
DOCUMENT NUMBER				
C1 SKU IMPB-RMB-GA-001				

3 4

14. IMPB CEB 250A TPN (C25C4B208VN2000NNNW00GC)

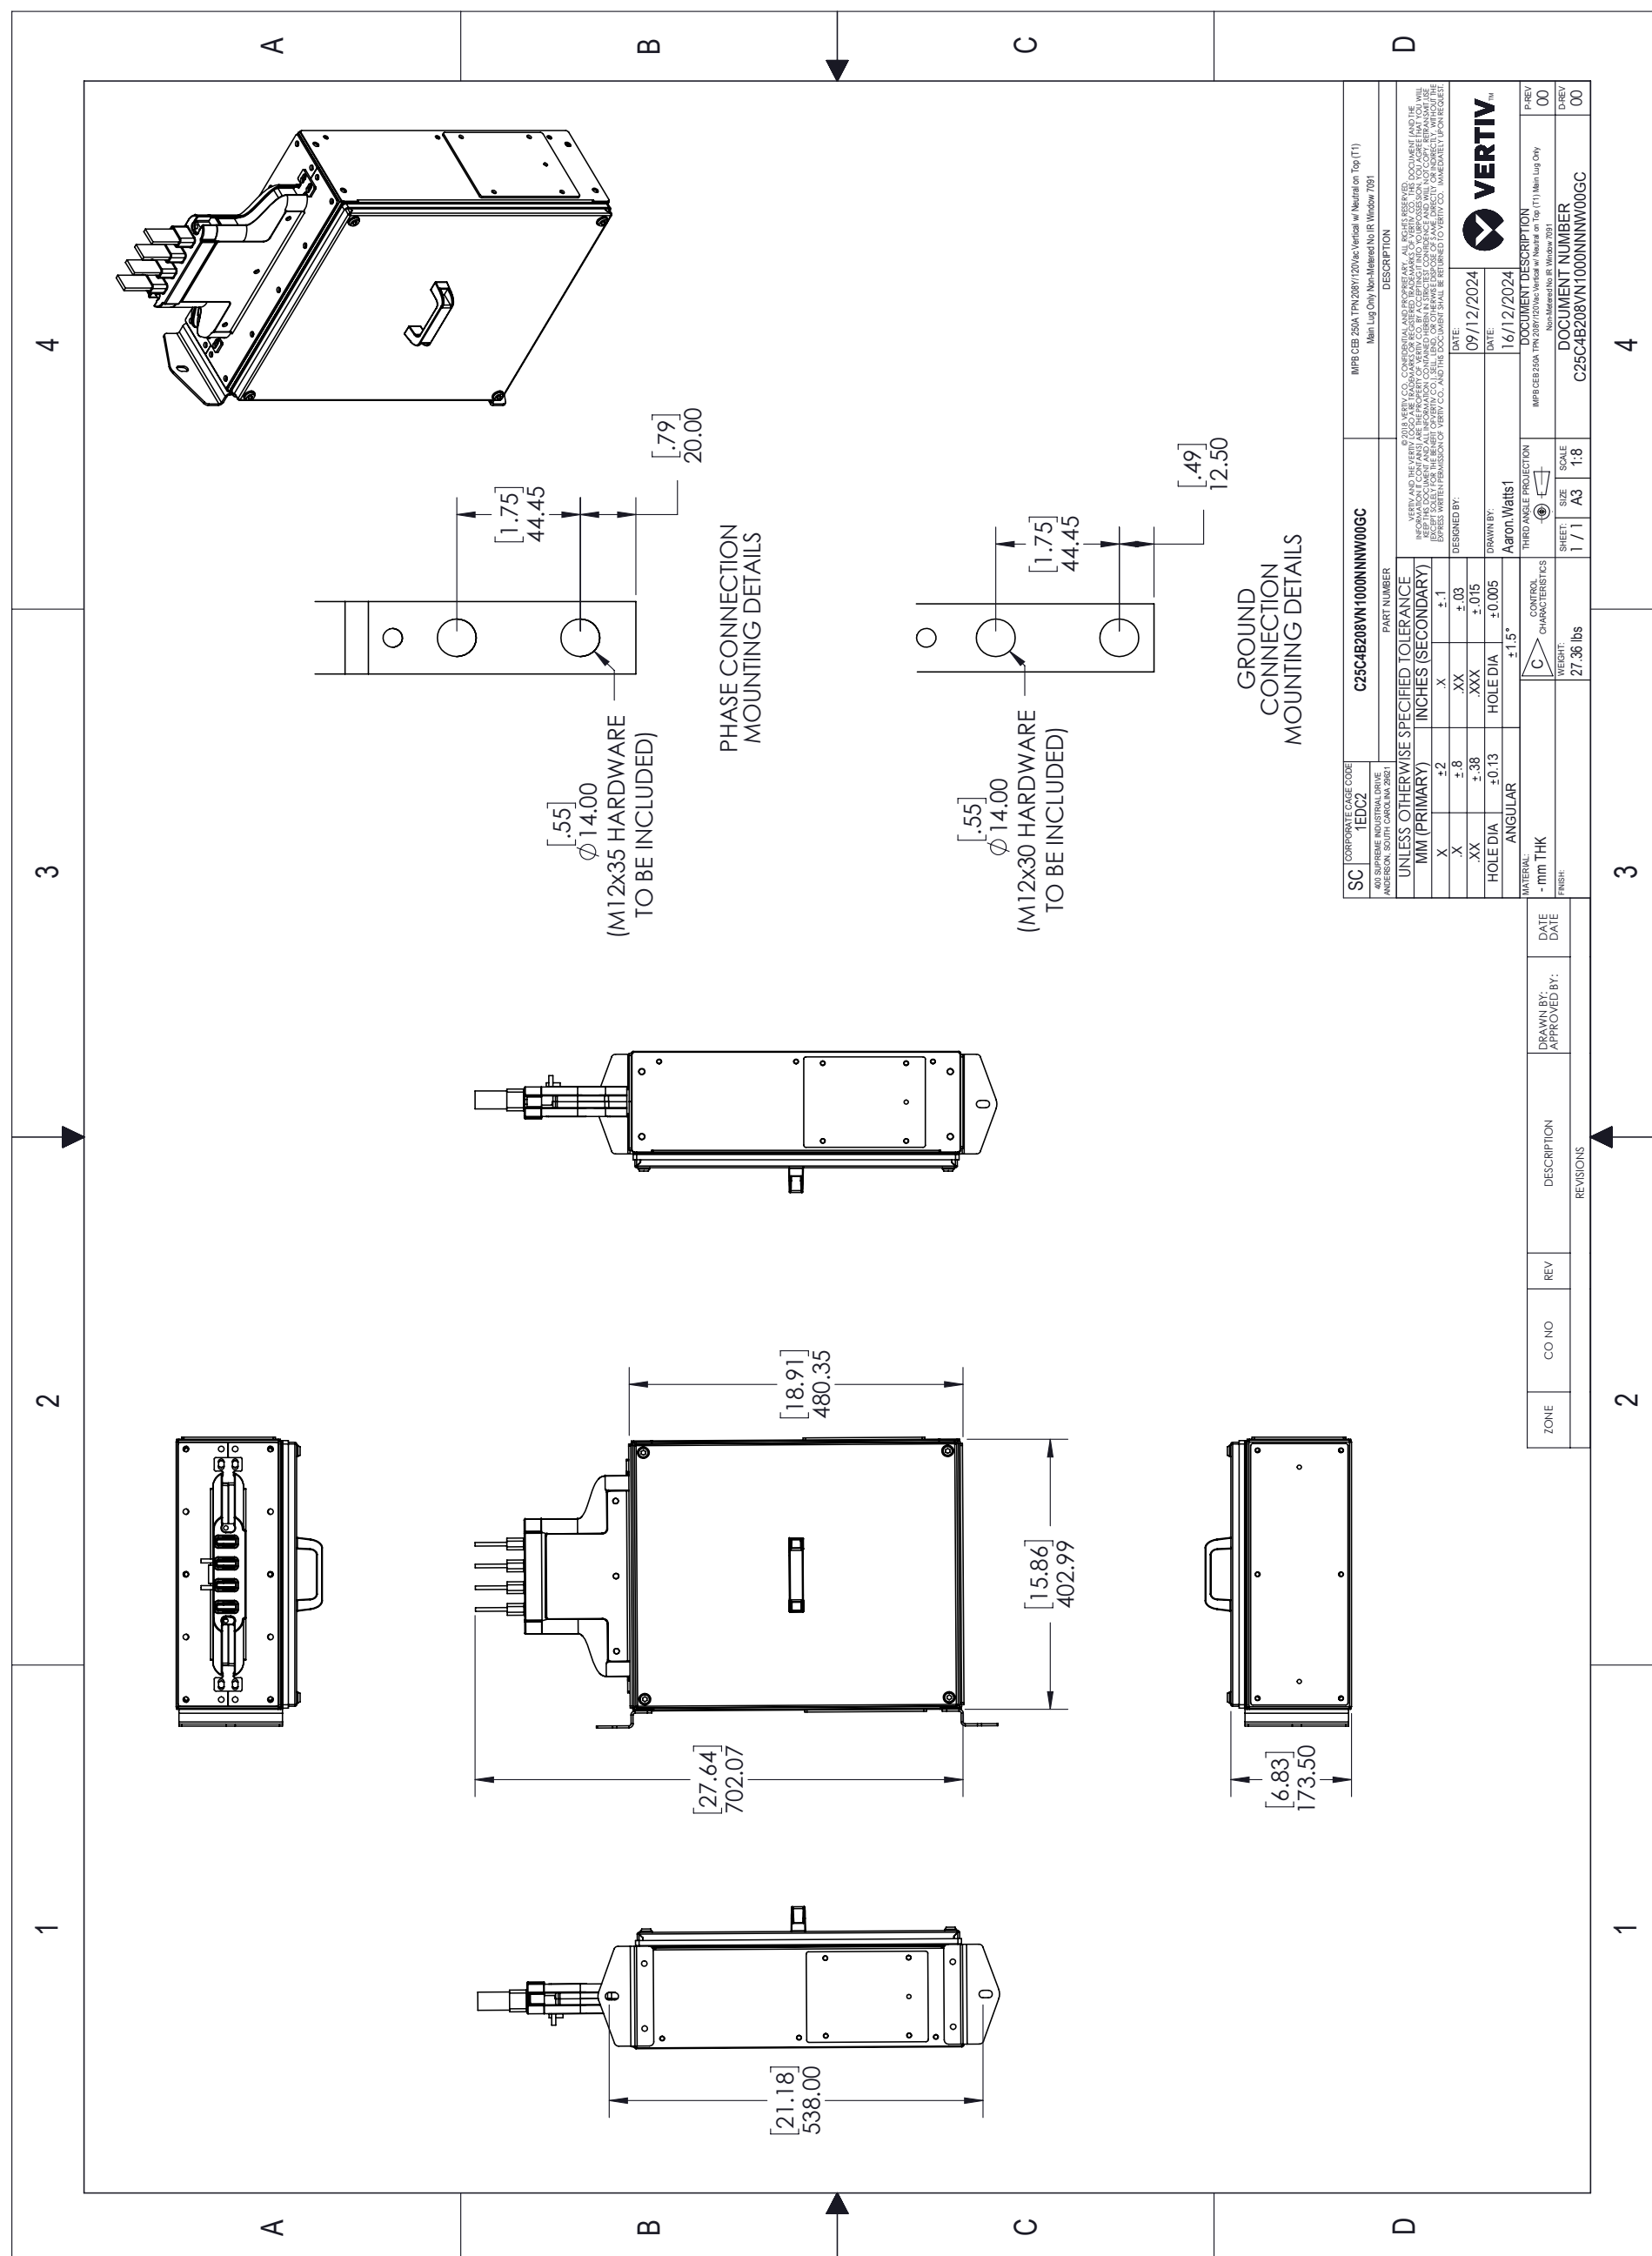

1 2 3 4

A B C D

Technical drawing of a VERTIV power supply unit, showing front, side, and detail views. The drawing includes dimensions in inches and millimeters, and a title block with part number, description, and revision information.

FRONT VIEW (Top):

- Overall Width: $[18.91]$ 480.35
- Overall Height: $[27.64]$ 702.07
- Bottom Flange Width: $[15.86]$ 402.99
- Bottom Flange Height: $[6.83]$ 173.50

FRONT VIEW (Bottom):

- Overall Width: $[21.18]$ 538.00
- Overall Height: $[21.18]$ 538.00

PHASE CONNECTION MOUNTING DETAILS:

- Mounting Hole Diameter: $\phi 14.00$ (M12x35 HARDWARE TO BE INCLUDED)
- Mounting Hole Spacing: $[1.75]$ 44.45
- Mounting Hole Diameter: $[.55]$
- Mounting Hole Spacing: $[.79]$ 20.00

GROUND CONNECTION MOUNTING DETAILS:

- Mounting Hole Diameter: $\phi 14.00$ (M12x30 HARDWARE TO BE INCLUDED)
- Mounting Hole Spacing: $[1.75]$ 44.45
- Mounting Hole Diameter: $[.55]$
- Mounting Hole Spacing: $[.49]$ 12.50

TITLE BLOCK:

SC	CORPORATE CAGE CODE	1EDC2	400 SUPREME INDUSTRIAL DRIVE ANDERSON, SOUTH CAROLINA 29621		
PART NUMBER					
C25C4B208VN2000NNW00GC					
DESCRIPTION					
IMPR CEB 250A 75W 288V/120VAC Vertical w/ Neutral on Top (T2)					
Main Lug Only Non-Isolated No R Window 7091					
UNLESS OTHERWISE SPECIFIED TOLERANCE					
INCHES (SECONDARY)					
MM (PRIMARY)					
X $\pm .2$					
X $\pm .1$					
X $\pm .03$					
X $\pm .015$					
HOLE DIA $\pm .013$					
HOLE DIA $\pm .005$					
ANGULAR $\pm 1.5^\circ$					
THIRD ANGLE PROJECTION					
DRAWN BY: Aaron Watts					
DATE: 09/12/2024					
DATE: 16/12/2024					
SHEET: 1 / 1					
SCALE: A3 1:8					
WEIGHT: 27.36 lbs					
FINISH: $\pm 1.5^\circ$					
REVISIONS					
ZONE	CO NO	REV	DESCRIPTION	DRAWN BY:	DATE
VERTIV					
IMPR CEB 250A 75W 288V/120VAC Vertical w/ Neutral on Top (T2)					
Main Lug Only Non-Isolated No R Window 7091					
DOCUMENT DESCRIPTION					
C25C4B208VN2000NNW00GC					
DOCUMENT NUMBER					
00					
P-REV					
00					
D-REV					
00					

16. SCOPE OF WORK

SMART ROW 2 – ASSEMBLY & START-UP

SERVICE SUMMARY

Feature	Detail
On-site Service	One site trip within the 48 contiguous states to start-up the system. Visit to be scheduled by the customer between 8am-5pm, Monday-Friday (excluding national holidays).
Customer Support	Includes access to the Customer Resolution Center (1-800-543-2378) and the Vertiv Customer Services Network Online Internet portal for extent of product warranty.
Consolidation	The SmartRow2 includes numerous shippable units (typically pallets or boxes) that originate from multiple factories and suppliers. Vertiv consolidates these items into a single customer shipment and reduces the likelihood of shippable units being lost at the customer site. This benefits the customer by relieving the burden of keeping track of multiple partial shipments.
Inside Delivery	Vertiv Service will move the shippable units from the delivery truck to the Staging Area. Vertiv Services will unpackage the shippable units and remove/dispose of the packaging material so that it is ready for assembly. Vertiv will verify that all material on the sales order has been received.
Project Management	Included with Consolidation and Inside Delivery. Vertiv will assign a project manager for the project. The Project Manager will supervise the Consolidation and Inside Delivery Process and communicate hardware shipment schedules with the customer.
Assembly	SmartRow2 is assembled onsite by Vertiv factory-trained and authorized technicians equipped with Vertiv. Proprietary tools and software. Vertiv CEs and Vertiv Partners are the only approved OEM service providers for Vertiv products. These technicians are supervised by a Site Manager who also gathers site- specific requirements like safety and work procedures.
Factory Startup	Warranty inspection and startup validates the warranty and initializes the warranty coverage period.

SERVICE PERFORMED

Consolidated Shipment

Shippable units may be available at time of order or built-to-order with a lead time. Vertiv safely stores these items in-warehouse until the customer is ready to receive the SmartRow2 in a single shipment. Other limits may apply; see Assumption and Clarifications as applicable for more details.

Inside Delivery

Vertiv Services will deliver the shippable units from the delivery truck to the Staging Area. Vertiv Services will unpackage the shippable units and remove/dispose of the packaging material so that it is ready for assembly. Vertiv will verify that all material has been received.

Change order option:

- There must be an appropriate loading dock with continuous, level floor from the dock to the staging area. If the shippable units must be moved up/downstairs, the customer must provide a suitable elevator, or charges for special rigging will be incurred. If the customer does not have an appropriate loading dock, nominal charges may/ may-not apply for a lift-truck delivery.

Project Management

Vertiv will assign a project manager and a site manager for the project.
The Project Manager will supervise the Consolidation and Inside Delivery Process and communicate schedules with the customer.
The Site Manager will supervise the assembly, startup, warranty inspection and turn over the SmartRow2 to the customer.

Site-Specific Requirements

All personnel will be available for up to two hours per week for Site Access, Safety Training, and other site-specific requirements.

Change Order Option:

- Vertiv can quote a price for additional man-hours if 2 hours per week is insufficient.

Assembly

There shall be continuous, level floor between the Staging Area and the Installation Location so that heavy items can be moved via casters/pallet jacks.

Change Order Option:

- If there is not continuous level floor, the customer must provide or pay for any necessary lift/rigging equipment.

Vertiv PMC, including RDU501 SmartRow2 Controller/Display

Vertiv will position, level, and bay together the PMC as described in the submittal documents. The customer is responsible for providing primary electrical power to the PMC.

Vertiv will program and configure the SmartRow2 RDU501 controller/display. This includes setting IP addresses so that the customer can monitor the system status remotely.

Change Order Option:

- Vertiv will quote IP addressing of equipment on the customer network, but this would be done by other personnel and scheduled separately. This is outside the scope of SmartRow2 assembly.

Vertiv IT Rack(s)

Vertiv will position, level, and bay together the Vertiv IT Racks as described in the submittal documents. Vertiv will not populate racks with customer IT gear, including blanking panels, servers, shelves, etc.

The customer must define addressing conventions (1,2,3,4, right-to-left or left-to-right) prior to start of work.

Cable Trays

Vertiv will install the SmartRow2 cable trays that are included with the SmartRow2 solution as described in the submittal documents.

Liebert® CRV's, Temperature Sensors, Modbus cables, and associated Plenums

Vertiv will position and level the Liebert® CRV and attach the associated plenums to provide cooling to the SmartRow2.

Vertiv will connect the necessary temperature sensors.

The customer is responsible for piping and primary power to the CRV along with connecting CANBus cable between the CRV and heat rejection. All specific requirements (such as piping traps and proper electrical grounding) for correct product installation are detailed in the product installation manual.

After the SmartRow2 is assembled and the Liebert® CRV is piped and powered by the customer in accordance with the product installation manual, Vertiv will perform a factory warranty inspection along with the rest of the SmartRow2.

Liebert® MC / CCD Condensers for Liebert® CRVs

The customer is responsible for installing the associated heat rejection. This includes primary power, CANBus communication wire, piping, refrigerant charging, and all other tasks in the Installation Manual. Any/all penetration points in the walls/ceilings/floors for any wiring or piping are also the customer's responsibility.

Rack PDUs

Vertiv will install and connect all rack PDUs (if applicable) including GXT5 power extensions (if applicable) as described in the submittal documents.

Liebert® GXT5 Single Phase UPS

Vertiv will install and connect all Liebert® GXT5 UPS's and connect power within the PMC cabinet and output to the PDUs as described in the submittal documents.

Additionally, Vertiv will install ancillary equipment such as Maintenance bypass and PD2-103 cabling and connectors if not already preinstalled.

After the SmartRow2 is assembled and Primary Power to the SmartRow2 is provided by the customer, Vertiv will perform factory startup of all GXT5 equipment along with the rest of the SmartRow2.

Switch

Vertiv will install and connect the switch within the PMC cabinet. as described in the submittal documents.

Firmware Updates

Vertiv will update firmware of any/all units to the current revision level. Shippable units are sourced globally, and firmware evolves as products may be in stock with prior revisions.

Wiring

Vertiv will run all necessary wiring for power and communication between cabinets as part of assembly. This includes setting IP/DIP switch settings for proper communication between the device and the PMC.

Accessories

The SmartRow2 is available with lights, door locks/sensors, temperature sensors that Vertiv will connect and install. Services associated with cameras are sold separately and out-of-scope for the SmartRow2 Assembly

RDU Monitor SmartRow2 mobile application.

Services associated with the RDU Monitor SmartRow2 mobile applications are quoted separately and out-of-scope for SmartRow2 assembly.

Fire Suppression Cabinet Assembly (if Applicable)

Vertiv will unpackage the Fire Suppression cabinet so that it is ready for installation.

Position level and bolt together the Fire Suppression cabinet to the adjoining cabinets.

Ensure all the wirings are connected, according to the information available in the submittal documents.

Install the piping in all the other cabinets in accordance with system drawings.

CUSTOMER RESPONSIBILITIES

In order to provide timely, accurate and thorough execution of the services described herein, Vertiv requests the following:

- Point of Contact: Provide an authorized point of contact(s), specific for the scope of work, for scheduling and coordination purposes.
- Scheduling: Make dates available for scheduling service. All visits must be requested 4 weeks in advance for assembly and 10 days for startup/warranty-inspection of need by contacting the Vertiv Project Manager. Site must be available for 5 consecutive business days. Customer may choose to pay for premium time if weekend work is necessary.
- Site Access: Prior to time of scheduled work, provide site access including any customer required escort, security clearance, safety training and badging for Vertiv personnel.
- Equipment Access: Convenient access to the equipment covered by the Scope of Work. Prior to scheduled time of work, notify Vertiv personnel of any special requirements for equipment access including lifts, ladders, etc.
- Shutdown: Service may require shutdown of load to ensure electrical connection integrity.
- Notification: If for any reason the work cannot be performed during scheduled time, notify Vertiv personnel 24-hours prior to scheduled event.
- Provide Method of Procedure (MOP) requirements/ templates, and required review period(s)

ASSUMPTIONS AND CLARIFICATIONS

- Vertiv will cover one month of storage costs as part of the consolidation service. If the original ship date is changed due to non-Vertiv delays, the customer is liable for any costs associated with the extended storage time.
- Vertiv start-up validates product warranty.
- Defects or damage resulting from installation not performed by Vertiv are not covered.
- Parts and Labor coverage is in accordance with Product Warranty. If a modified warranty is purchased, terms default to that specific package.
- Any customer site visit is limited to eight (8) hours per visit. Any time beyond forty (40) hours/wk or eight (8) hrs/day or additional Startup visits will be billed separately.
- Expenses incurred due to delays that are beyond the control of Vertiv may be billed at cost.
- Startup visit must be scheduled confirmation of proper installation (if Vertiv not involved with installation).
- This pricing excludes any load bank testing. This can also be quoted separately if required.
- Pricing excludes activities associated with 3rd party commissioning.
- Pricing excludes any type of circuit breaker NEMA testing. This can also be quoted separately if required.
- Customer/Installing contractor is responsible for providing elevated access as necessary.
- Any additional requests beyond the scope of this document will be billed separately by Vertiv.
- Vertiv will not perform physical changes to the site building (such as drilling holes, etc.)

TERMS AND CONDITIONS

Subject to all Terms & Conditions as noted in the Vertiv Terms & Conditions or the terms of a Master Agreement between the parties, if any, shall apply.

SCOPE OF WORK

SMART ROW 2 – FIRE SUPPRESSION

START-UP & OPTIONAL SERVICES

SERVICE SUMMARY

Feature	Detail
On-site Service	One site trip within the 48 contiguous states to start-up the system. Visit to be scheduled by the customer between 8am-5pm, Monday-Friday (excluding national holidays).
Service Professional	Performed by Vertiv factory-trained and authorized technician equipped with Vertiv Proprietary tools and software. Vertiv CEs and Vertiv Partners are the only approved OEM service providers for Vertiv products.
Permitting	Permits are the responsibility of the customer to see if one is required. Additional fees may apply and can vary based on the customer's location. (see Assumptions and Clarifications).
Optional services	Optional system integrity services can be requested by the customer as part of the startup and installation.

SERVICE PERFORMED

Fire Suppression Start-up:

1. Verify that 120V AC circuit has been ran to the fire suppression panel.
2. Verify all the items on the Fire Suppression readiness punch list have been completed and acknowledged.
3. Functionality test all input and output circuits for proper operation.
4. Complete the warranty inspection of the system.
5. Provide training to the customer on the operation of the Fire Suppression system.

Door Fan Test (if applicable):

1. Conduct a door fan test with the standardized Fan test system.
2. Measure the pressure retention rate and calculate the amount of air flowing through the Door fan.
3. Determine the total size of the air leaks (if any).
4. Provide the customer with the pressure test report.

Discharge Test (if applicable):

1. Replace the system cylinder with the Proinert test cylinder provided by the manufacturer.
2. Conduct a discharge test on the system.
3. Ensure that the oxygen level falls below 15% and maintains that level for a minimum of 10 minutes.
4. Place the system cylinder back into place and arm the system.
5. Provide the customer with a discharge test report.

CUSTOMER RESPONSIBILITIES

In order to provide timely, accurate and thorough execution of the services described herein, Vertiv requests the following:

- Point of Contact: Provide an authorized point of contact(s), specific for the scope of work, for scheduling and coordination purposes.
- Scheduling: Make dates available for scheduling service. All visits must be requested 10 business days in advance of need by contacting the Vertiv Customer Resolution Center at 1-800-543-2378.
- Site Access: Prior to time of scheduled work, provide site access including any customer required escort, security clearance, safety training and badging for Vertiv service personnel.
- Equipment Access: Convenient access to the equipment covered by the Scope of Work. Prior to scheduled time of work, notify Vertiv service personnel of any special requirements for equipment access including lifts, ladders, etc.
- Shutdown: Service may require shutdown of load to ensure electrical connection integrity.
- Notification: If for any reason the work cannot be performed during scheduled time, notify Vertiv service personnel 24-hours prior to scheduled event.

ASSUMPTIONS AND CLARIFICATIONS

- Assembly: The assembly of the Fire Suppression cabinet is included in the SmartRow2.
- Punch list: This document confirms system readiness and must be completed before startup. It is included in the submittal package.
- Permitting: The customer is responsible for any permits (if required), as it falls outside the original scope. While the process can be facilitated, the customer will be responsible for all permitting costs, including any optional services listed above.
- Maintenance: Per NFPA 2001, the FIKE Proinert IG-55 SHP Pro suppression system protecting the SmartRow2 shall be inspected on a semi-annual basis. These inspections are not only important in ensuring the included clean agent system is functionally operational but are necessary to qualify for any manufacturer warranties. Per the manufacturer's warranty guidelines, the equipment must be maintained on a semi-annual frequency by an authorized FIKE distributor commencing with the date of Startup.
- Optional Integrity testing: Manufacturer intends to provide both the integrity test services (Door fan test and Discharge test) at the customer's facility either directly or through a local Fike distributor. This pricing includes the necessary labor, equipment, and materials to complete this testing.
- Manufacturer does not guarantee a passing test after the system has been handed over to the customer and is not responsible for the patching and sealing of the enclosure if the cable and CRV penetrations have not been sealed.

TERMS AND CONDITIONS

Subject to all Terms & Conditions as noted in the Vertiv Terms & Conditions or the terms of a Master Agreement between the parties, if any, shall apply.

SmartRow 2

Scope of Work Checklist

Customer Name: _____

Project Name: _____

Project Number: _____

This document is to serve as a checklist to help identify and budget the various work activities involved with assembling and installing a SmartRow 2. It is the customers responsibility to ensure all tasks are assigned to partners which will result in a successful SmartRow 2 project.

Contact Vertiv for available local support resources to provide technical guidance as needed. Call 800 543-2378

The **X** indicates the responsible party for that task. Multiple **X**'s indicate shared responsibility.

This document is provided as a reference document and does not replace any product manuals or supporting documentation. Always read all product documentation before performing any work.

Customer (Name) *includes responsibility for Mechanical, Electrical, and/or General Contractors as needed* : _____

Project Management: _____

Assembly Team Lead: _____

Consolidator: _____

Vertiv Warranty Inspection Tech: _____

Vertiv Sales Rep (LVO): _____

		SR2N04040PAB1-SUBTL Revision: Rev A Author: Tomáš Krech Date: 04/24/2026																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
--	--	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

3	SR2N04040PAB1-SUBTL Revision: Rev A SmartRow 2 Assembly							
3,01	☐	☐	☐	☒	☐	☐	☐	Receive shipment(s).
3,02	☐	☐	☐	☒	☐	☐	☐	Bring equipment from truck into room, unpackage and remove debris (included with SmartRow 2 Delivery Service).
3,03	☐	☐	☐	☒	☐	☐	☐	Review equipment for shipping damage (recommended the same party who receives the equipment).
3,04	☐	☐	☐	☒	☐	☐	☐	Assemble, gasket and level PMC unit per submittal package.
3,05	☐	☐	☐	☒	☐	☐	☐	Assemble, gasket and level indoor cooling unit(s) per submittal package.
3,06	☐	☐	☐	☒	☐	☐	☐	Assemble, gasket and level racks per submittal package.
3,07	☐	☐	☐	☒	☐	☐	☐	Assemble and attach rubber cable grommets.
3,08	☐	☐	☐	☒	☐	☐	☐	Connect door switch wire and rack lighting wire harnesses.
3,09	☐	☐	☐	☒	☐	☐	☐	Install cable troughs on top of equipment.
3,10	☐	☐	☐	☒	☐	☐	☐	Neatly connect and route CANbus communication cables and address rack temperature 2T-sensors (set dip switches).
3,11	☐	☐	☐	☒	☐	☐	☐	Neatly route the rack temperature 2T temperature probes into position in front of EIA rails.
3,12	☐	☐	☐	☒	☐	☐	☐	Neatly route and connect all Ethernet cables between SmartRow 2 Network vNSA switch, and all UPS and cooling unit Unity monitoring cards, primary rack-PDU RPC2 monitoring cards, and cooling unit teamwork connections.
3,13	☐	☐	☐	☒	☐	☐	☐	Neatly route and connect all rack-PDU array Ethernet cables.
4	SmartRow 2 Installation including the Fire Suppression System							
4,01	☐	☐	☐	☒	☐	☐	☐	Install PMC to MBC (20KVA) or PMC to UPS (10KVA) interconnect cabling (cables provided with SmartRow 2)
4,02	☐	☐	☐	☒	☐	☐	☐	Install UPS to MBC (20KVA) interconnect cabling (cables provided with SmartRow 2) or Mount POD (Included in SmartRow 2) on UPS (10KVA).
4,03	☐	☐	☐	☐	☐	☐	☒	Connect low voltage wires to indoor cooling unit and outdoor heat rejection.
4,04	☒	☐	☐	☐	☐	☐	☐	Provide and connect condensate drain line to each indoor cooling unit.
4,05	☒	☐	☐	☐	☐	☐	☐	Connect utility high voltage building feed to main input in PMC.
4,06	☒	☐	☒	☐	☐	☐	☐	Ensure the handover document is completed and acknowledged by all responsible parties if startup activities are scheduled at different times.
5	SmartRow 2 Startup							
5,01	☐	☐	☐	☒	☐	☐	☐	Ensure all rubber cable grommets are installed
5,02	☐	☐	☐	☐	☐	☐	☒	Cooling system Warranty Inspection.
5,03	☐	☐	☐	☐	☐	☐	☒	UPS system Warranty Inspection.
5,04	☐	☐	☐	☐	☐	☐	☒	Configure RDU501 Controller
5,05	☐	☐	☐	☒	☐	☐	☐	Close breakers on rack-PDUs.
5,06	☐	☐	☐	☒	☐	☐	☐	Perform final SmartRow 2 functional test (Door switches, backup fans, HMI).
5,07	☐	☐	☐	☒	☐	☐	☐	Clean entire SmartRow 2, inside and outside. When cleaning see-through Plexiglas doors follow instructions in manual to avoid scratching.
5,08	☐	☐	☐	☒	☐	☐	☐	Ensure the SmartRow 2 Startup Form has been completed.
6	Fire Suppression System Start up							
6,01	☒	☒	☐	☒	☐	☒	☐	Ensure all the required parties are present on site for the installation of the Fire Suppression System.
6,02	☐	☐	☐	☒	☐	☐	☐	Position, level and bolt together the Fire suppression cabinet to the rest of the row.
6,03	☐	☐	☐	☒	☐	☐	☐	Ensure all the wiring is connected, according to the information available in the submittals.
6,04	☐	☐	☐	☒	☐	☐	☐	Install the piping in all the other cabinets.
6,05	☒	☒	☐	☐	☐	☒	☐	Ensure the Punch list items are completed and signed by the responsible parties.
6,06	☒	☒	☐	☐	☐	☒	☐	Review the closeout document with the information about the pre-test conducted at Flagship.
6,07	☐	☐	☐	☐	☐	☒	☐	Validate the warranty of the Fire supression system.
6,08	☐	☐	☐	☐	☐	☒	☐	Verify that all components are functioning as intended.
6,09	☒	☐	☐	☐	☐	☒	☐	Provide training to the customer on the system.
7	Optional - Fire Suppression System Integrity Test (upon customer request)							
7,01	☐	☐	☐	☐	☐	☒	☐	Conduct a door fan test with the standardized Fan test system.
7,02	☐	☐	☐	☐	☐	☒	☐	Measure the pressure retention rate and calculate the amount of air flowing through the Door fan.
7,03	☐	☐	☐	☐	☐	☒	☐	Determine the total size of the air leaks.
7,04	☐	☐	☐	☐	☐	☒	☐	Provide the customer with the pressure test report.
7,05	☐	☐	☐	☐	☐	☒	☐	Replace the system cylinder with the Proinert test cylinder provided by the manufacturer.
7,06	☐	☐	☐	☐	☐	☒	☐	Conduct a discharge test on the system.
7,07	☐	☐	☐	☐	☐	☒	☐	Ensure that the oxygen level falls below 15% and maintains that level for a minimum of 10 minutes.
7,08	☐	☐	☐	☐	☐	☒	☐	Place the system cylinder back into place and arm the system.
7,09	☐	☐	☐	☐	☐	☒	☐	Provide the customer with a discharge test report.