



Solution: SR2N08040PAB1

1. Change Log..... 3

2. Site Planning Datasheet..... 4

3. Interconnection Guide (ICG)..... 5

4. Field Supplied Cable & Part List 23

5. Vertiv MSR2 600mm IT Rack 24

6. Power Management Cabinet - 40kW (PMC40) 25

7. CRD30 26

8. Plenum CRD30 27

9. IMPB4BAR 28

10. JOINTPACK 29

11. END CAP 30

12. ROOFBRACKETS 31

13. V3 TPN 3x 30A 32

14. IMPB CEB 250A TPN 33

15. IMPB CEB 250A TPN 34

16. SCOPE OF WORK 35

1. Change Log

Rev	Date	Author	Description	Number of Change
A	04/24/2026	TK	Initial Release	CO-1127543



2. Site Planning Datasheet

Smart Row 2 Site Planning Datasheet (208V, 3 phase + PE)

Configuration Number	Part Number	Max Row Capacity (kW)	IT Racks per Row	Capacity per Rack (kW)	Cooling Units per Row	Rack PDU Count	Main Input Breaker Size	Condenser Breaker Size	Condenser Dry Weight kg (lbs)	Row Dimensions (L x H x D) mm (in)	Row Weight kg (lbs)	Min. Staging Area m2 (ft2)
31	SR2N03030NAB1	30	3	10	1	3	200 A	70 A	193 (424.6)	2700 (106.3) x 2433 (95.8) x 1400 (55.1)	1858 (4095)	22.34 (240.47)
32	SR2N03030PAB1	30	3	10	1	6	200 A	70 A	193 (424.6)	2700 (106.3) x 2433 (95.8) x 1400 (55.1)	1959 (4318)	23.40 (251.88)
33	SR2N03030FAB1	30	3	10	2	6	200 A	70 A	193 (424.6)	3000 (118.1) x 2433 (95.8) x 1400 (55.1)	2385 (5258)	27.05 (291.16)
34	SR2N04030NAB1	30	4	7.5	1	4	200 A	70 A	193 (424.6)	3300 (129.9) x 2433 (95.8) x 1400 (55.1)	2069 (4562)	24.38 (262.42)
35	SR2N04030PAB1	30	4	7.5	1	8	200 A	70 A	193 (424.6)	3300 (129.9) x 2433 (95.8) x 1400 (55.1)	2178 (4802)	25.53 (274.80)
36	SR2N04030FAB1	30	4	7.5	2	8	200 A	70 A	193 (424.6)	3600 (141.7) x 2433 (95.8) x 1400 (55.1)	2604 (5742)	29.18 (314.09)
37	SR2N05030NAB1	30	5	6	1	5	200 A	70 A	193 (424.6)	3900 (153.5) x 2433 (95.8) x 1400 (55.1)	2281 (5028)	26.42 (284.38)
38	SR2N05030PAB1	30	5	6	1	10	200 A	70 A	193 (424.6)	3900 (153.5) x 2433 (95.8) x 1400 (55.1)	2397 (5284)	27.66 (297.73)
39	SR2N05030FAB1	30	5	6	2	10	200 A	70 A	193 (424.6)	4200 (165.4) x 2433 (95.8) x 1400 (55.1)	2823 (6224)	31.31 (337.02)
40	SR2N04040NAB1	40	4	10	2	4	200 A	70 A	193 (424.6)	3600 (141.7) x 2433 (95.8) x 1400 (55.1)	2484 (5476)	27.83 (299.56)
41	SR2N04040PAB1	40	4	10	2	8	200 A	70 A	193 (424.6)	3600 (141.7) x 2433 (95.8) x 1400 (55.1)	2581 (5690)	28.78 (309.79)
42	SR2N04040FAB1	40	4	10	3	8	200 A	70 A	193 (424.6)	3900 (153.5) x 2433 (95.8) x 1400 (55.1)	2007 (6630)	32.43 (349.07)
43	SR2N05040NAB1	40	5	8	2	5	200 A	70 A	193 (424.6)	4200 (165.4) x 2433 (95.8) x 1400 (55.1)	2709 (5973)	30.07 (323.67)
44	SR2N05040PAB1	40	5	8	2	10	200 A	70 A	193 (424.6)	4200 (165.4) x 2433 (95.8) x 1400 (55.1)	2828 (6234)	31.31 (337.02)
45	SR2N05040FAB1	40	5	8	3	10	200 A	70 A	193 (424.6)	4500 (177.2) x 2433 (95.8) x 1400 (55.1)	3254 (7174)	34.96 (376.31)
46	SR2N06040NAB1	40	6	6.8	2	6	200 A	70 A	193 (424.6)	4800 (189.0) x 2433 (95.8) x 1400 (55.1)	2951 (6505)	32.57 (350.58)
47	SR2N06040PAB1	40	6	6.8	2	12	200 A	70 A	193 (424.6)	4800 (189.0) x 2433 (95.8) x 1400 (55.1)	3096 (6827)	34.28 (368.99)
48	SR2N06040FAB1	40	6	6.8	3	12	200 A	70 A	193 (424.6)	5100 (200.8) x 2433 (95.8) x 1400 (55.1)	3523 (7767)	37.93 (408.28)
49	SR2N07040NAB1	40	7	5.7	2	7	200 A	70 A	193 (424.6)	5400 (212.6) x 2433 (95.8) x 1400 (55.1)	3169 (6986)	34.71 (373.62)
50	SR2N07040PAB1	40	7	5.7	2	14	200 A	70 A	193 (424.6)	5400 (212.6) x 2433 (95.8) x 1400 (55.1)	3329 (7339)	36.61 (394.07)
51	SR2N07040FAB1	40	7	5.7	3	14	200 A	70 A	193 (424.6)	5700 (224.4) x 2433 (95.8) x 1400 (55.1)	3755 (8279)	40.26 (433.36)
52	SR2N08040NAB1	40	8	5	2	8	200 A	70 A	193 (424.6)	6000 (236.2) x 2433 (95.8) x 1400 (55.1)	3380 (7452)	36.75 (395.57)
53	SR2N08040PAB1	40	8	5	2	16	200 A	70 A	193 (424.6)	6000 (236.2) x 2433 (95.8) x 1400 (55.1)	3547 (7821)	38.74 (416.99)
54	SR2N08040FAB1	40	8	5	3	16	200 A	70 A	193 (424.6)	6300 (248.0) x 2433 (95.8) x 1400 (55.1)	3974 (8761)	42.39 (456.28)


Notes:

1. System Environmental Conditions: Indoors, 41°F to 104°F (5°C to 40°C), RH to 80% with Max dew point of 82.4°F (28°C) Meets the requirements of data center or computer room environments.
2. Floor surface must be level and continuous (expansion joints sealed, raised floor tile gaps sealed) Ground bearing capacity is more than 1000 kg/m2
3. No building springler head should be within 19.7 in (0.5 m)
4. Install in accordance with national and local electrical codes
5. Cable Sizing (Main Input Breaker Size) 3/0 AWG
6. Row Dimensions do not include necessary space needed for access including per ADA or local codes

SHEET NO.	DRAWN BY:	© 2024 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE THE PROPERTY OF VERTIV GROUP CORPORATION. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, TRANSMIT, OR OTHERWISE DISCLOSE IT TO ANY OTHER PERSON OR ENTITY WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. AND THE DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.		DWG. NO.		
CO. NO.	DESIGNED BY:	DATE (LATEST REV.)				
REF. DWG.	APPROVED BY:	REVISION 05/21/2024 05/21/2024 05/21/2024				
TITLE Smart Row 2 Site Planning Datasheet (208V, 3 phase + PE)						

3. Interconnection Guide (ICG)

A		0		1		2		3		4		5		6		7		8		9			
Vertiv Row Solution Knowledge to Build Optimized Infrastructure Solutions VERTIV™																							
B																							
Vertiv™ SmartRow™ 2: 8x IT Rack 40kW																							
											Row IT Load Capacity: 40 kW Power Redundancy UPS: Yes Power Redundancy rPDU: Yes Cooling Redundancy: No Dimensions: Length: 19.68 ft [6000 mm] Depth: 4.6 ft [1400 mm] Height: 7.98 ft [2433 mm]												
E																							
SHEET NO.		1 / 18		DRAWN BY:		Nilesh Patil		DWG NO. SR2N08040PAB1														VERTIV™	
CHANGE NO.				APPROVED BY:		Petr Harant		DATE (LATEST REV.) 01.09.2026															
PAGE DESCRIPTION:		1 - Title page / cover sheet		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081																			

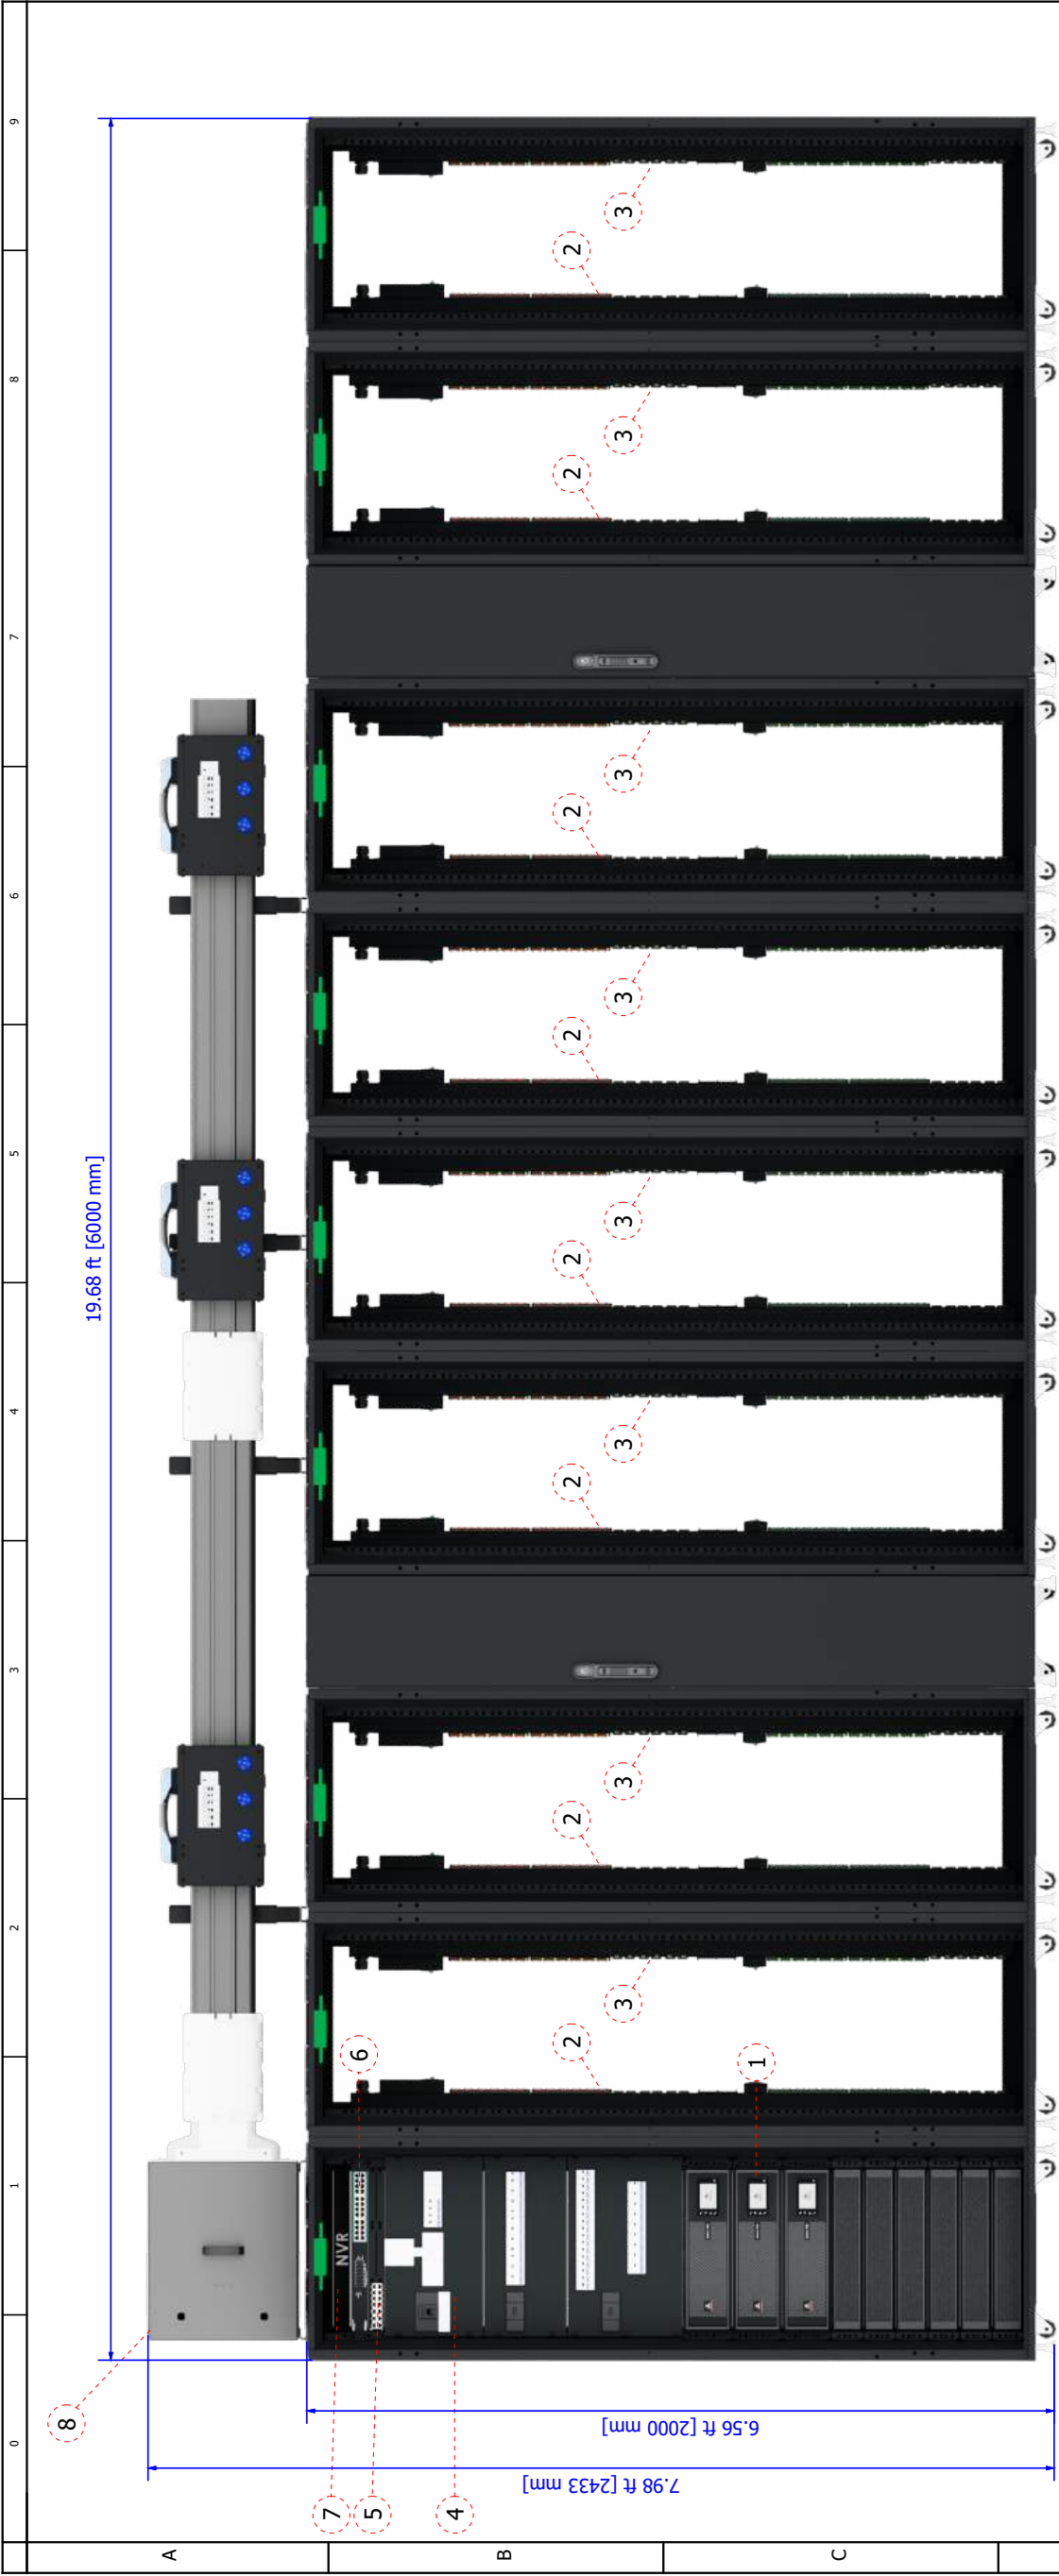

Front View


No.	Components	No.	Components
1	ITA2 20k UPS 2+1	6	PoE Switch
2	rPDU Feed A	7	NVR (optional)
3	rPDU Feed B	8	IMPB System A/B
4	Power Management Part PMC40		
5	RDU501		

- Notes:
- Row IT Load Capacity is driven by number of IT-Racks (IT-Rack x 5 kW per rack).
 - System Environmental Conditions: Indoors, 41 F to 104 F (5 C to 40 C), RH to 80% with Max dew point of 82.4 F (28 C).
 - Floor surface must be level and continuous (expansion joints sealed, no floor drains, etc).
 - No building sprinkler head should be within 19.7 in (0.5 m).


 2T Sensor mounted on rack roof

PAGE DESCRIPTION: 2 - vRow Front View		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 8x IT Rack 40kW		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081		 VERTIV™
CHANGE NO.		APPROVED BY: Petr Harant		DATE (LATEST REV.) 01.09.2026		
SHEET NO. 2 / 18		DRAWN BY: Nilesh Patil		DWG NO. SR2N08040PAB1		
© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, REUSE, OR OTHERWISE DISCLOSE IT TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.						

PMC/IT Cabinet Connection Details

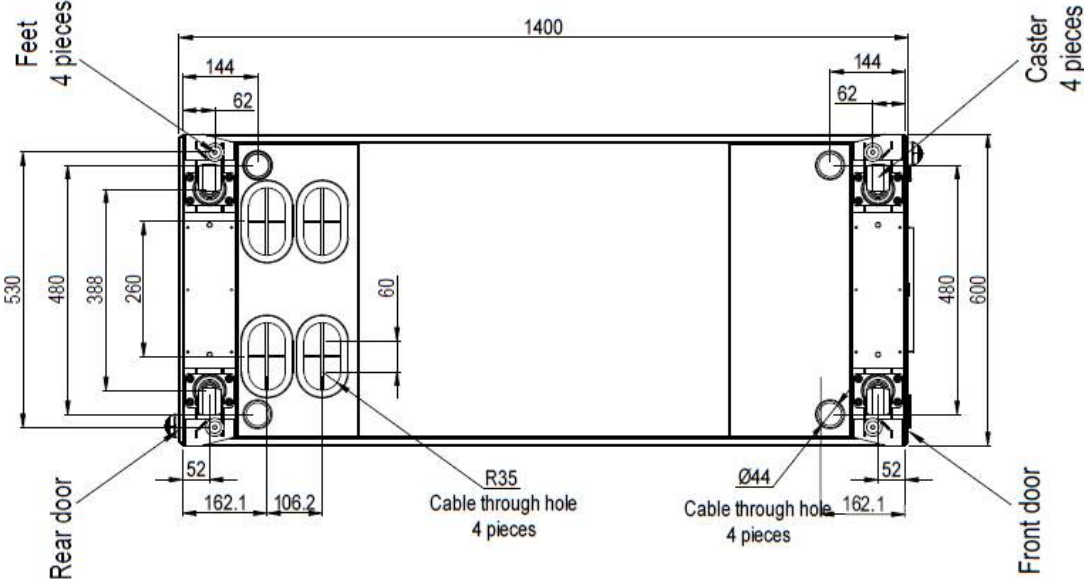

CRV Connection Details

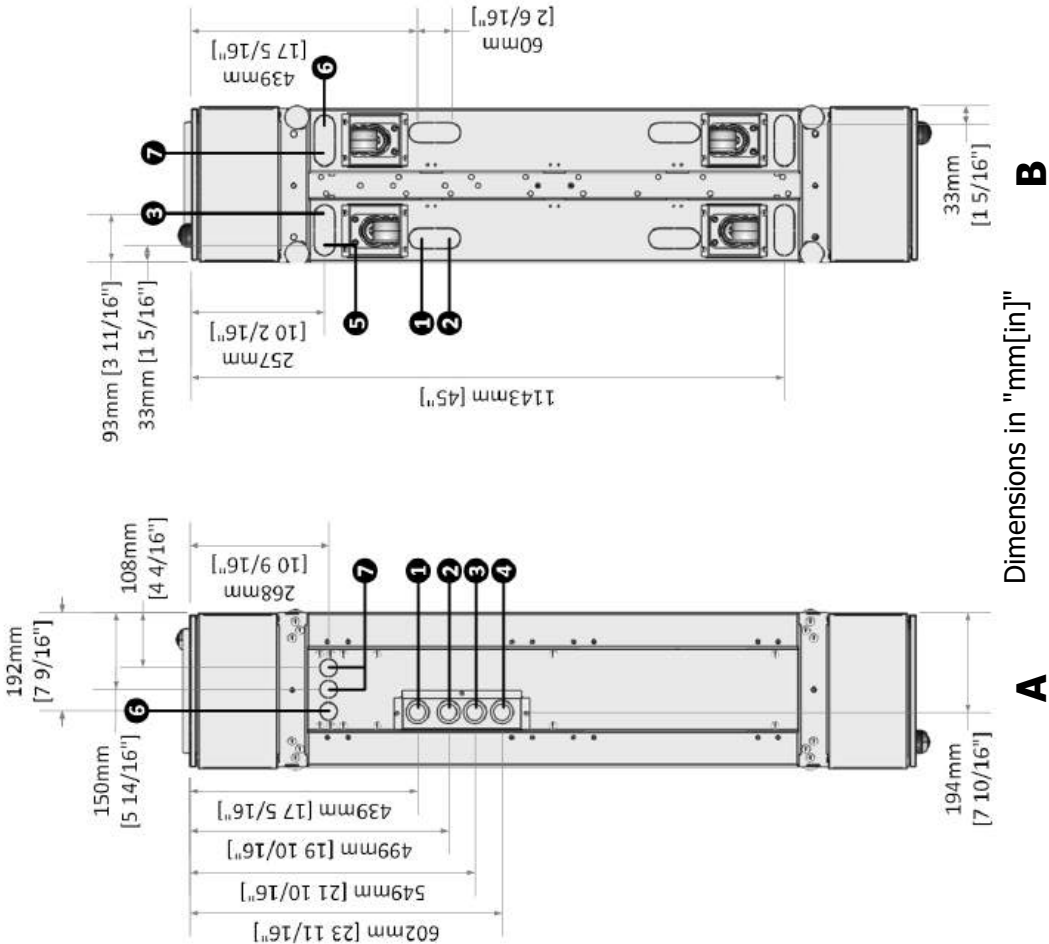

Item	Description	
A	Top Plate	
B	Bottom Plate	
1	RLT	Refrigerant liquid line inlet
2	RGT	Refrigerant gas line outlet
3	HS	Humidifier Supply
4	CPT	Condensate pump outlet
5	CGT	Condensate gravity outlet
6	HVT	High voltage cable access
7	LVT	Low voltage cable access
		5/8 in. O.D. copper sweat
		7/8 in. O.D. copper sweat
		Rc 1/2 in. female copper, threaded joint
		G 3/4 x Rc 1/2 in.
		Rc 1/2 in. female copper, threaded joint
		Combination knockout:28 mm (1-1/8 in.)
		Combination knockout:28 mm (1-1/8 in.)

Note :- Pipe sizes are for connection purposes and not the required line size.
Consult thermal manuals for line sizes.

SHEET NO. 4 / 18		DRAWN BY: Nilesh Patil		DWG NO. SR2N08040PAB1		VERTIV™
APPROVED BY: Petr Harant						
PAGE DESCRIPTION: 2.b - vRow Bottom View		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 8x IT Rack 40kW				
CHANGE NO.		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081				
		DATE (LATEST REV.) 01.09.2026				
		© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, RENT, LEASE, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.				



Cable overview

0											1											2											3											4											5											6											7											8											9										
Cable overview																																																																																																													
A											Packaging No.											Cable Category											Cable No.											Tag1											Tag2											Length (inch /mm)											Description																																
0411B76B											PMC40 Internal Integrated Cable (Factory assembled)											W400											206-C13											202-C14											137.80/3500											Front and rear fan expansion cables -Rack1																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W403											201-AI/DI_L											204-NO;204-COM											17.71/450											The front door status switch is connected to the THD cable-Rack1																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W404											201-AI/DI_R											208-NO;208-COM											77/1950											The rear door status switch is connected to the THD cable-Rack1																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W405											POE LOCK_RJ											203/IL-1:RJ45											67/1700											Intelligent door lock communication cable 1-Rack1																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W406 & W407											203/IL-1 & To 203/IL-1											To 207/IL-2 & 207/IL-2											59/1500 & 150/3800											Intelligent door lock communication cable 2&3 -Rack1																																											
B											PMC40 Internal Integrated Cable (Factory assembled)											W400											206-C13											202-C14											137.80/3500											Front and rear fan expansion cables -Rack2																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W403											201-AI/DI_L											204-NO;204-COM											17.71/450											The front door status switch is connected to the THD cable-Rack2																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W404											201-AI/DI_R											208-NO;208-COM											77/1950											The rear door status switch is connected to the THD cable-Rack2																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W405											POE LOCK_RJ											203/IL-1:RJ45											67/1700											Intelligent door lock communication cable 1-Rack1																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W406 & W407											203/IL-1 & To 203/IL-1											To 207/IL-2 & 207/IL-2											59/1500 & 150/3800											Intelligent door lock communication cable 2&3 -Rack2																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W400											206-C13											202-C14											137.80/3500											Front and rear fan expansion cables -Rack3																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W403											201-AI/DI_L											204-NO;204-COM											17.71/450											The front door status switch is connected to the THD cable-Rack3																																											
C											PMC40 Internal Integrated Cable (Factory assembled)											W404											201-AI/DI_R											208-NO;208-COM											77/1950											The rear door status switch is connected to the THD cable-Rack3																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W405											POE LOCK_RJ											203/IL-1:RJ45											67/1700											Intelligent door lock communication cable 1-Rack3																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W406 & W407											203/IL-1 & To 203/IL-1											To 207/IL-2 & 207/IL-2											59/1500 & 150/3800											Intelligent door lock communication cable 2&3 -Rack3																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W400											206-C13											202-C14											137.80/3500											Front and rear fan expansion cables -Rack4																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W403											201-AI/DI_L											204-NO;204-COM											17.71/450											The front door status switch is connected to the THD cable-Rack4																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W404											201-AI/DI_R											208-NO;208-COM											77/1950											The rear door status switch is connected to the THD cable-Rack4																																											
D											PMC40 Internal Integrated Cable (Factory assembled)											W405											POE LOCK_RJ											203/IL-1:RJ45											67/1700											Intelligent door lock communication cable 1-Rack4																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W406 & W407											203/IL-1 & To 203/IL-1											To 207/IL-2 & 207/IL-2											59/1500 & 150/3800											Intelligent door lock communication cable 2&3 -Rack4																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W400											206-C13											202-C14											137.80/3500											Front and rear fan expansion cables -Rack5																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W403											201-AI/DI_L											204-NO;204-COM											17.71/450											The front door status switch is connected to the THD cable-Rack5																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W404											201-AI/DI_R											208-NO;208-COM											77/1950											The rear door status switch is connected to the THD cable-Rack5																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W405											POE LOCK_RJ											203/IL-1:RJ45											67/1700											Intelligent door lock communication cable 1-Rack5																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W406 & W407											203/IL-1 & To 203/IL-1											To 207/IL-2 & 207/IL-2											59/1500 & 150/3800											Intelligent door lock communication cable 2&3 -Rack5																																											
E											PMC40 Internal Integrated Cable (Factory assembled)											W400											206-C13											202-C14											137.80/3500											Front and rear fan expansion cables -Rack6																																											
											PMC40 Internal Integrated Cable (Factory assembled)											W403											201-AI/DI_L											204-NO;204-COM											17.71/450											The front door status switch is connected to the THD cable-Rack6																																											
SHEET NO. 5 / 18											DRAWN BY: Nilesch Patil											© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED.VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, REUSE, TRANSMIT, OR OTHERWISE DISCLOSE IT IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. ANY VIOLATION OF THESE TERMS SHALL BE IMMEDIATELY UPON REQUEST.											DWG NO. SR2N08040PAB1											VERTIV																																																																	
CHANGE NO.											APPROVED BY: Petr Harant											TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 8x IT Rack 40kW											DATE (LATEST REV.) 01.09.2026											REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081																																																																	
PAGE DESCRIPTION: 3 - Cable overview : =vRow+Rack1-W400 - =vRow+Rack6-W403																																																																																																													



Cable overview

											0	1	2	3	4	5	6	7	8	9
Cable overview																				
A		Packaging No.	Cable Category			Cable No.	Tag1	Tag2	Length (inch /mm)	Description										
		0411B76B	PMC40 Internal Integrated Cable (Factory assembled)			W404	201-AI/DI_R	208-NO;208-COM	77/1950	The rear door status switch is connected to the THD cable-Rack6										
			PMC40 Internal Integrated Cable (Factory assembled)			W405	POE LOCK_RJ	203/IL-1;RJ45	67/1700	Intelligent door lock communication cable 1-Rack6										
			PMC40 Internal Integrated Cable (Factory assembled)			W406 & W407	203/IL-1 & To 203/IL-1	To 207/IL-2 & 207/IL-2	59/1500 & 150/3800	Intelligent door lock communication cable 2&3 -Rack6										
			PMC40 Internal Integrated Cable (Factory assembled)			W400	206-C13	202-C14	137.80/3500	Front and rear fan expansion cables -Rack7										
			PMC40 Internal Integrated Cable (Factory assembled)			W403	201-AI/DI_L	204-NO;204-COM	17.71/450	The front door status switch is connected to the THD cable-Rack7										
			PMC40 Internal Integrated Cable (Factory assembled)			W404	201-AI/DI_R	208-NO;208-COM	77/1950	The rear door status switch is connected to the THD cable-Rack7										
B			PMC40 Internal Integrated Cable (Factory assembled)			W405	POE LOCK_RJ	203/IL-1;RJ45	67/1700	Intelligent door lock communication cable 1-Rack7										
			PMC40 Internal Integrated Cable (Factory assembled)			W406 & W407	203/IL-1 & To 203/IL-1	To 207/IL-2 & 207/IL-2	59/1500 & 150/3800	Intelligent door lock communication cable 2&3 -Rack7										
			PMC40 Internal Integrated Cable (Factory assembled)			W400	206-C13	202-C14	137.80/3500	Front and rear fan expansion cables -Rack8										
			PMC40 Internal Integrated Cable (Factory assembled)			W403	201-AI/DI_L	204-NO;204-COM	17.71/450	The front door status switch is connected to the THD cable-Rack8										
			PMC40 Internal Integrated Cable (Factory assembled)			W404	201-AI/DI_R	208-NO;208-COM	77/1950	The rear door status switch is connected to the THD cable-Rack8										
			PMC40 Internal Integrated Cable (Factory assembled)			W405	POE LOCK_RJ	203/IL-1;RJ45	67/1700	Intelligent door lock communication cable 1-Rack8										
C			PMC40 Internal Integrated Cable (Factory assembled)			W406 & W407	203/IL-1 & To 203/IL-1	To 207/IL-2 & 207/IL-2	59/1500 & 150/3800	Intelligent door lock communication cable 2&3 -Rack8										
			PMC40 Internal Integrated Cable (Factory assembled)			W400	206-C13	202-C14	137.80/3500	Front and rear fan expansion cables -PMC										
			PMC40 Internal Integrated Cable (Factory assembled)			W403	201-AI/DI_L	204-NO;204-COM	17.71/450	The front door status switch is connected to the THD cable-PMC										
			PMC40 Internal Integrated Cable (Factory assembled)			W404	201-AI/DI_R	208-NO;208-COM	77/1950	The rear door status switch is connected to the THD cable-PMC										
			PMC40 Internal Integrated Cable (Factory assembled)			W405	POE LOCK_RJ	203/IL-1;RJ45	67/1700	Intelligent door lock communication cable 1-PMC										
D		0411B76D	UPS input cable (Onsite assembled)			W150	UPS1 Input: L1;L2;L3;N;G	UPS1 : inputA;B;C;N;G	51/1300	Input cable from PMC40 to UPS1										
			UPS input cable (Onsite assembled)			W151	UPS2 Input: L1;L2;L3;N;G	UPS2 : inputA;B;C;N;G	51/1300	Input cable from PMC40 to UPS2										
			UPS input cable (Onsite assembled)			W152	UPS3 Input: L1;L2;L3;N;G	UPS3 : inputA;B;C;N;G	51/1300	Input cable from PMC40 to UPS3										
			UPS output cable (Onsite assembled)			W153	UPS1 output: L1;L2;L3;N;G	UPS1 : outputA;B;C;N;G	51/1300	Output cable from UPS1 to PMC40										
			UPS output cable (Onsite assembled)			W154	UPS2 output: L1;L2;L3;N;G	UPS2 : outputA;B;C;N;G	51/1300	Output cable from UPS2 to PMC40										
			UPS output cable (Onsite assembled)			W155	UPS3 output: L1;L2;L3;N;G	UPS3 : outputA;B;C;N;G	51/1300	Output cable from UPS3 to PMC40										
			IMPB System input cable (Onsite assembled)			W157	IMPB System A:L1 L2 L3 N G	PMC:IMPB System A_L1 L2 L3 N G	102/2600	Cable between PMC40 and IMPB System A										
			IMPB System input cable (Onsite assembled)			W158	IMPB System B:L1 L2 L3 N G	PMC:IMPB System B_L1 L2 L3 N G	102/2600	Cable between PMC40 and IMPB System B										
E			CRV Input Power Cable (Onsite assembled)			W156-Short	L1 L2 G	L1 L2 G	197/5000	PMC40 to CRAC Short cable-CRV1										
SHEET NO.		6 / 18		DRAWN BY:		Nilesh Patil		DWG NO.			SR2N08040PAB1									
CHANGE NO.				APPROVED BY:		Petr Harant		DATE (LATEST REV.)			01.09.2026			REVISION:						
PAGE DESCRIPTION:		3.a - Cable overview : =vRow+Rack6-W404 - =vRow+1CRV1-W156-Short		Vertiv™ SmartRow™ 2: 8x IT Rack 40kW		TITLE / DESCRIPTION:			© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED.VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, RENT, LEASE, LOAN, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.			505 N. CLEVELAND AVE WESTERVILLE OH 43081								
																				



Cable overview

0											1											2											3											4											5											6											7											8											9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
Cable overview																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
A											Packaging No.											Cable Category											Cable No.											Tag1											Tag2											Length (inch/mm)											Description																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
											0411B76D											CRV Input Power Cable (Onsite assembled)											W156-Mid											L1 L3 G											L1 L3 G											283/7200											PMC40 to CRAC Mid cable -CRV2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
											0411B76E											Internal DC&HMI power cables of the PMC40 (Factory assembled)											W018											TB9:11;12											HMI:DC+;DC-											67/1700											HMI power cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal communication cable (Factory assembled)											W203											PMC: SPD											4DIF:Door1/DI1											77/1950											Network cable from SPD port to 4DIF																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal communication cable (Factory assembled)											W205											PMC: Fan control											RDU501:DO1											69/1750											Network cable from emergency fan control port to RDU501																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal communication cable (Factory assembled)											W206											RS485+;RS485-											HMI-C;RDU501:COM2											34/850											Network cable from HMI to RDU501																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
B																						PMC40 Internal communication cable (Factory assembled)											W202											PMC: Red control											RDU501-DO2											75/1910											Network cable from controls the red light port to RDU501																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)											W019											Rlight:DC+;Rlight:DC-											DC+;DC-											57/1450											PMC40 Rear door light power cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)											W020											Flight:WH;RE;BK;BL											PMC-FLIGHT											69/1750											PMC40 Front door light power cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)											W021											RSwitch:COM;NC											PMC_R-SW											59/1500											Rear door microswitch cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)											W022											FSwitch:COM;NC											PMC_F-SW											67/1700											Front door microswitch cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal lighting, fan power supply, and control cables (Factory assembled)											W023											Engency FAN:C13											PMC40:FAN;RACK FAN-R											48/1220											PMC40 emergency fan power cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
C																						PMC40 Internal communication cable (Factory assembled)											W201											PMC:THD_RJ1											RDU501:Sensor 1											24/600											Network cable from PMC40 THD to RDU501																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal communication cable (Factory assembled)											W204											PMC: Meter											RDU501:COM3											73/1850											PMU to RDU501 COM3 meter communication network cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
											0411B76F											PMC40 Internal communication cable (Factory assembled)											W207											4DI-RJ1											RDU501:Sensor 2											14/350											Network cable from PMC40 4DIF to RDU501																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						UPS protection control cable (Onside assembled)											W050											PMC:UPS1 contact											UPS1:EPO;3;1											48/1200											UPS1 protection control cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						UPS protection control cable (Onside assembled)											W051											PMC:UPS2 contact											UPS2:EPO;3;1											48/1200											UPS2 protection control cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						UPS protection control cable (Onside assembled)											W052											PMC:UPS3 contact											UPS3:EPO;3;1											48/1200											UPS3 protection control cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
D																						PMC40 Internal communication cable (Onsite assembled)											W251											UPS1:UNITY card											POE Switch(UPS1)											118/3000											Network cable from UPS1 to POE Switch																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal communication cable (Onsite assembled)											W252											UPS2:UNITY card											POE Switch(UPS2)											110/2800											Network cable from UPS2 to POE Switch																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal communication cable (Onsite assembled)											W253											UPS3:UNITY card											POE Switch(UPS3)											102/2600											Network cable from UPS3 to POE Switch																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						Network cable between the NVR and the switch (Onsite assembled)											W254											NVR											POE Switch(NVR)											47/1200											Network cable from NVR to POE Switch																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						PMC40 Internal communication cable (Onsite assembled)											W250											RDU501:LAN2											POE Switch(RDU501)											59/1500											Network cable from RDU501 to POE Switch																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
											0411B797											The emergency fan spans the CRV expansion cables (Onsite assembled)											W350											RACK FAN-R											RACK FAN-P											12/300											The emergency fan is cascaded across the CRV1 cables																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						The front door light & control light span the air conditioner expansion cable (Onsite assembled)											W351											RACK_FLIGHT;F-SW											RACK_FLIGHT;F-SW											14/350											The front door light and front door microswitch cascades across CRV1 cables																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						The front door light & control light span the air conditioner expansion cable (Onsite assembled)											W352											RACK_RLIGHT;R-SW											RACK_RLIGHT;R-SW											14/350											The rear door light and rear door microswitch cascades across CRV1 cables																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
E																						CRV plenum department status collection & intelligent door lock communication cable (Onsite assembled)											W357											1-NO;2-NO;2-COM											385;1-COM											93/2350											CRV1 internal door status collection cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
																						CRV plenum department status collection & intelligent door lock communication cable (Onsite assembled)											W358											First LOCK(F);POE LOCK_RJ											Second LOCK;POE LOCK(F)											177/4500+ 67/1700											CRV1 internal intelligent POE door lock communication cable																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													



Cable overview

											0	1	2	3	4	5	6	7	8	9
Cable overview																				
A		Packaging No.	Cable Category				Cable No.	Tag1	Tag2	Length (inch /mm)	Description									
		0411B797	The emergency fan spans the CRV expansion cables (Onsite assembled)				W350	RACK FAN-R	RACK FAN-P	12/300	The emergency fan is cascaded across the CRV2 cables									
			The front door light & control light span the air conditioner expansion cable (Onsite assembled)				W351	RACK_FLIGHT;F-SW	RACK_FLIGHT;F-SW	14/350	The front door light and front door microswitch cascades across CRV2 cables									
			The front door light & control light span the air conditioner expansion cable (Onsite assembled)				W352	RACK_RLIGHT;R-SW	RACK_RLIGHT;R-SW	14/350	The rear door light and rear door microswitch cascades across CRV2 cables									
			CRV plenum department status collection & intelligent door lock communication cable (Onsite assembled)				W357	1-NO;2-NO;2-COM	385;1-COM	93/2350	CRV2 internal door status collection cable									
			CRV plenum department status collection & intelligent door lock communication cable (Onsite assembled)				W358	First LOCK(F);POE LOCK_RJ	Second LOCK;POE LOCK(F)	177/4500+67/1700	CRV2 internal intelligent POE door lock communication cable									
B		0411B798	POE Smart door lock Network cable (Onsite assembled)				W269	RACK1_POE LOCK	POE Switcher(RACK1)	99/2500	Network cable from Rack1 intelligent door lock to POE switch									
			POE Smart door lock Network cable (Onsite assembled)				W270	RACK2_POE LOCK	POE Switcher(RACK2)	126/3200	Network cable from Rack2 intelligent door lock to POE switch									
			POE Smart door lock Network cable (Onsite assembled)				W271	RACK3_POE LOCK	POE Switcher(RACK3)	165/4200	Network cable from Rack3 intelligent door lock to POE switch									
			POE Smart door lock Network cable (Onsite assembled)				W272	RACK4_POE LOCK	POE Switcher(RACK4)	193/4900	Network cable from Rack4 intelligent door lock to POE switch									
			POE Smart door lock Network cable (Onsite assembled)				W273	RACK5_POE LOCK	POE Switcher(RACK5)	221/5600	Network cable from Rack5 intelligent door lock to POE switch									
			POE Smart door lock Network cable (Onsite assembled)				W274	RACK6_POE LOCK	POE Switcher(RACK6)	260/6600	Network cable from Rack6 intelligent door lock to POE switch									
			POE Smart door lock Network cable (Onsite assembled)				W275	RACK7_POE LOCK	POE Switcher(RACK7)	288/7300	Network cable from Rack7 intelligent door lock to POE switch									
C			POE Smart door lock Network cable (Onsite assembled)				W276	RACK8_POE LOCK	POE Switcher(RACK8)	315/8000	Network cable from Rack8 intelligent door lock to POE switch									
			Network cable between CRAC door status signal to RDU501 or 4DJF (Onsite assembled)				W261	385(CRAC1)	RDU501 : smoke1	177/4500	Network cable from CRAC_1 door status port to RDU501									
			Cabinet THD expansion cable over air conditioner (Onsite assembled)				W267	RACK-THD-RJ2	RACK-THD-RJ1	14/350	Cabinet THD cables are cascaded across air conditioners-CRV1									
			POE Smart door lock Network cable (Onsite assembled)				W277	CRAC_POE LOCK	POE Switcher(CRAC1)	126/3200	Network cable from CRV1 intelligent door lock to POE switch									
			Network cable between CRAC door status signal to RDU501 or 4DJF (Onsite assembled)				W262	385(CRAC2)	RDU501 : smoke2	236/6000	Network cable from CRAC_2 door status port to RDU501									
			Cabinet THD expansion cable over air conditioner (Onsite assembled)				W267	RACK-THD-RJ2	RACK-THD-RJ1	14/350	Cabinet THD cables are cascaded across air conditioners-CRV2									
D			POE Smart door lock Network cable (Onsite assembled)				W278	CRAC_POE LOCK	POE Switcher(CRAC2)	197/5000	Network cable from CRV2 intelligent door lock to POE switch									
			Network cable between the PDU and POE switch (Onsite assembled)				W264	PDU	POE Switch(PDU)	137.8/3500	Network cable from PDU to POE Switch									
			Network cable between the PDU and PDU (Onsite assembled)				W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack1									
			Network cable between the PDU and PDU (Onsite assembled)				W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack1/2									
			Network cable between the PDU and PDU (Onsite assembled)				W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack2									
			Network cable between the PDU and PDU (Onsite assembled)				W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack2/3									
			Network cable between the PDU and PDU (Onsite assembled)				W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack3									
E			Network cable between the PDU and PDU (Onsite assembled)				W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack3/4									
			Network cable between the PDU and PDU (Onsite assembled)				W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack4									
© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED.VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, RETRANSMIT, DISTRIBUTE, OR OTHERWISE DISCLOSE THE INFORMATION CONTAINED HEREIN TO ANY THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. IMMEDIATELY UPON REQUEST.											DWG NO. SR2N08040PAB1									
TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 8x IT Rack 40kW											DATE (LATEST REV.)01.09.2026		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081							
PAGE DESCRIPTION: 3.c - Cable overview : =vRow+CRV2-W350 - =vRow+1RACK4-W265																				



Cable overview

Cable overview										
A	Packaging No.	Cable Category	Cable No.	Tag1	Tag2	Length (inch/mm)	Description			
B	0411B798	Network cable between the PDU and PDU (Onsite assembled)	W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack4/5			
		Network cable between the PDU and PDU (Onsite assembled)	W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack5			
		Network cable between the PDU and PDU (Onsite assembled)	W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack5/6			
		Network cable between the PDU and PDU (Onsite assembled)	W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack6			
		Network cable between the PDU and PDU (Onsite assembled)	W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack6/7			
		Network cable between the PDU and PDU (Onsite assembled)	W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack7			
		Network cable between the PDU and PDU (Onsite assembled)	W266	PDU	PDU	118/3000	Network cable from the different cabinet PDU to PDU -Rack7/8			
		Network cable between the PDU and PDU (Onsite assembled)	W265	PDU	PDU	157/4000	Network cable from the same cabinet PDU to PDU -Rack8			
		POE Smart door lock Network cable (Onsite assembled)	W268	PMC40_POE LOCK	POE Switcher(PMC40)	36/900	Network cable from PMC40 intelligent door lock to POE switch			
		Network cable between the CRAC and the switch (Onsite assembled)	W255	CRV1	POE Switch(CRV1)	197/5000	Network cable from CRV1 to POE Switch			
C	0411C211	Network cable between the Water Leak and the switch or 4DJF (Onsite assembled)	W258	Water Leak1	RDU501:DI1	197/5000	Network cable from Water Leak1 to RDU501			
		Network cable between the CRAC and the switch (Onsite assembled)	W256	CRAC_2	POE Switch(CRAC2)	256/6500	Network cable from CRV2 to POE Switch			
		Network cable between the Water Leak and the switch or 4DJF (Onsite assembled)	W259	Water Leak2	RDU501:DI2	256/6500	Network cable from Water Leak2 to RDU501			
		POE Smart door lock Network cable (Onsite assembled)	W284	CRAC_1	CRAC_2	236/6000	Network cable from CRV1 to CRV2			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - PMC to Rack1			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack1 to Rack2			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack1			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack2 to Rack3			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack2			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack3 to Rack4			
D	0411D798	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack3			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack4 to Rack5			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack4			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack5 to Rack6			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack5			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack6 to Rack7			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack6			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack7 to Rack8			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack8			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack9 to Rack10			
E	0411E798	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack9			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack10 to Rack11			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack11			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack12 to Rack13			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack13			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack14 to Rack15			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack15			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack16 to Rack17			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W302	RACK_FAN	RACK_FAN/To RACK_FAN	17.72/450	Pre-installed cables for the emergency fan cascade in the MSR2-NR6P cabinet-Rack17			
		MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W208	THD-RJ2	THD-RJ1	33.46/850	THD cascaded pre-installed cables for the MSR2-NR6P cabinet - Rack18 to Rack19			
© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED.VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, REUSE, TRANSMIT, OR OTHERWISE DISCLOSE IT TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.										
SHEET NO. 9 / 18		DRAWN BY: Nilesh Patil		DWG NO. SR2N08040PAB1			DATE (LATEST REV.) 01.09.2026		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081	
CHANGE NO.		APPROVED BY: Petr Harant		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 8x IT Rack 40kW						
PAGE DESCRIPTION: 3.d - Cable overview : =vRow+1Rack4-W266 - =vRow+Rack6-W302										



Cable overview

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

Geist PDUs -SR2 for 40K(8*ITRack)

Legend:

- Factory connected cables (dashed blue line)
- Cables connected at assembly (solid red line)


Diagram Details:

- Top Section (iMPB System A):** Includes TOB#1A, TOB#2A, and TOB#3A. TOB#1A is connected to CEB-1. TOB#2A and TOB#3A are connected to CEB-2.
- Bottom Section (iMPB System B):** Includes TOB#1B, TOB#2B, and TOB#3B. TOB#1B is connected to CEB-1. TOB#2B and TOB#3B are connected to CEB-2.
- Rack Connections:** Eight racks (Rack1 to Rack8) are shown. Each rack has two PDU units, rPDU-A and rPDU-B. The diagram shows various cable types: Factory connected cables (dashed blue lines) and Cables connected at assembly (solid red lines).
- Key Components:** ITA2 UPS, POE Switch, RDU501, and various cable labels (e.g., W157, W158, W159, W160, W161, W162, W163, W164, W165, W166, W167, W168, W169, W170, W171, W172, W173, W174, W175, W176, W177, W178, W179, W180, W181, W182, W183, W184, W185, W186, W187, W188, W189, W190, W191, W192, W193, W194, W195, W196, W197, W198, W199, W200).
- Labels:** CRV1, CRV2, PMCA40, and various rack labels (Rack1 to Rack8).

Rear View

PAGE DESCRIPTION: 4 - PDU wiring diagram		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 8x IT Rack 40kW		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081	
DRAWN BY: Nilesh Patil		DATE (LATEST REV.): 01.09.2026			
APPROVED BY: Petr Harant		DWG NO. SR2N08040PAB1			
SHEET NO. 11 / 18		VERTIV™			
CHANGE NO.		© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND NOT DISCLOSE IT TO ANY OTHER PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IN THE EVENT OF A DISCONTINUATION OF BUSINESS, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION.			

CRVs(CRD30)-SR2 for 40K (8*ITRack)

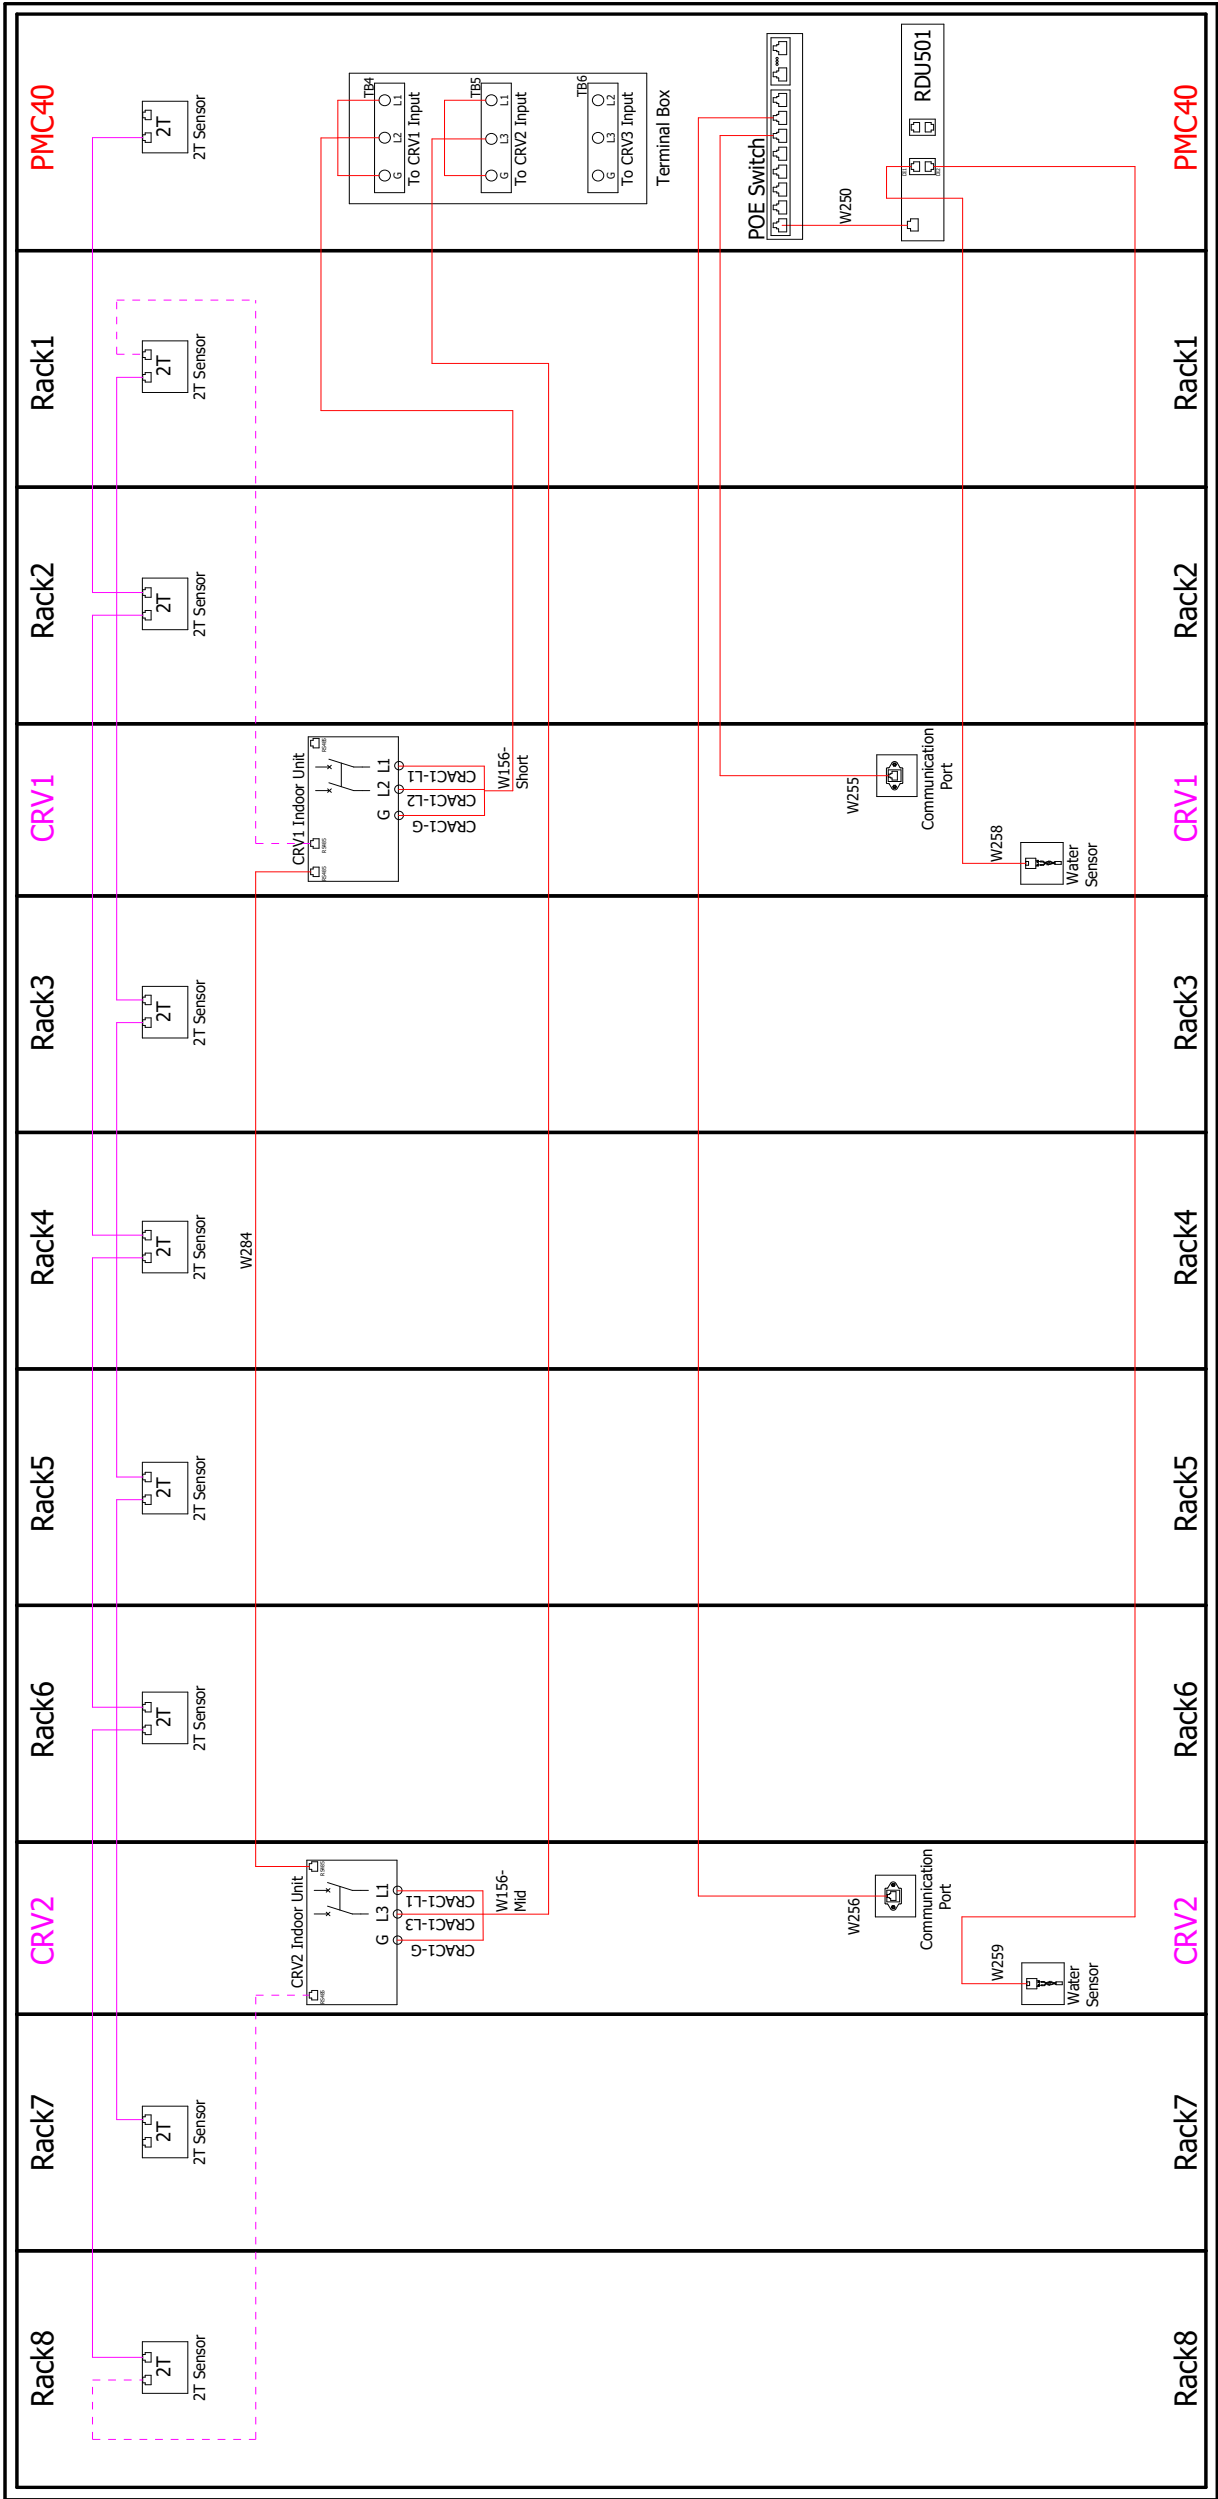

- Rear View
- Factory connected cables

Cables connected at assembly


300157G2 (10 ft)

300157G1 (6 ft)

SHEET NO. 12 / 18		DRAWN BY: Nilesh Patil		DWG NO. SR2N08040PAB1	 VERTIV™
CHANGE NO.		APPROVED BY: Petr Harant			
PAGE DESCRIPTION: 4.a - Air conditioner wiring diagram		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 8x IT Rack 40kW			
				DATE (LATEST REV.) 01.09.2026	
				REVISION:	
				505 N. CLEVELAND AVE WESTERVILLE OH 43081	
© 2020 VERTIV GROUP. CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP. CORPORATION AND THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP. CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND INFORMATION CONFIDENTIAL AND PROPRIETARY AND WILL NOT REPRODUCE, COPIY, DISSEMINATE, OR OTHERWISE DISCLOSE THE INFORMATION CONTAINED HEREIN WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP. CORPORATION. AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP. CORPORATION IMMEDIATELY UPON REQUEST.					

© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, TRANSMIT, OR OTHERWISE DISCLOSE IT TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.

POE Locks -SR2 for 40K (8*ITRack)

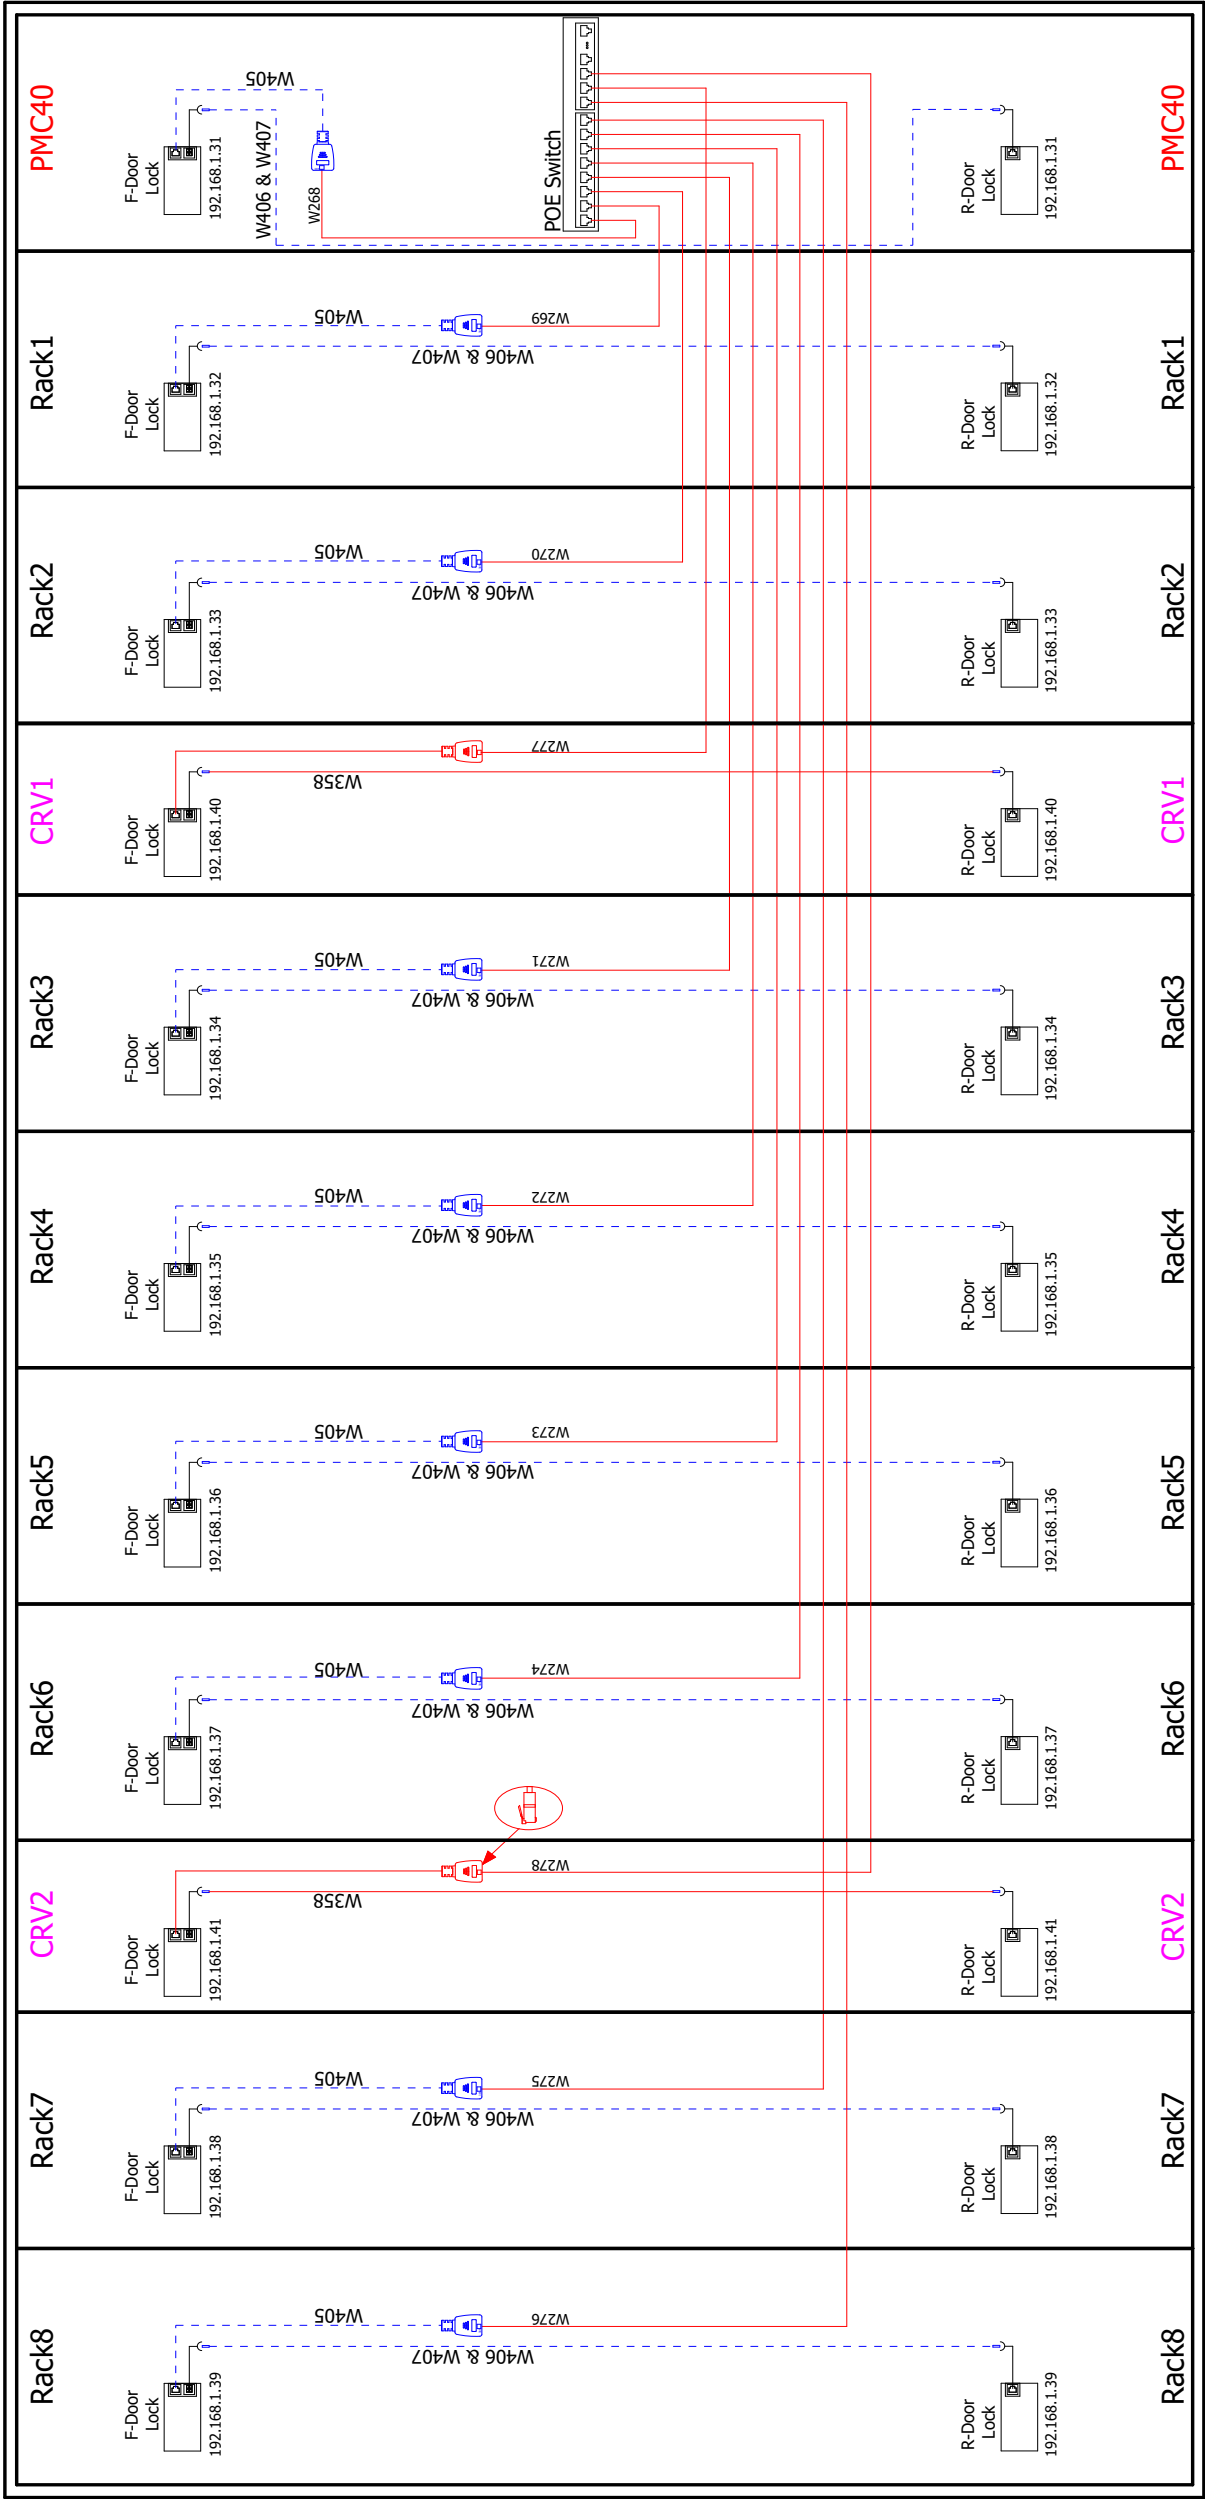


Rear View

--- Factory connected cables
— Cables connected at assembly

SHEET NO. 13 / 18		DRAWN BY: Nilesh Patil		DWG NO. SR2N08040PAB1	 VERTIV™
CHANGE NO.		APPROVED BY: Petr Harant			
PAGE DESCRIPTION: 4.b - Intelligent lock wiring diagram					
TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 8x IT Rack 40kW					
REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081					
DATE (LATEST REV.): 01.09.2026					
© 2020 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT, AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, TRANSMIT, OR OTHERWISE DISCLOSE IT TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.					

0		1	2	3	4	5	6	7	8	9

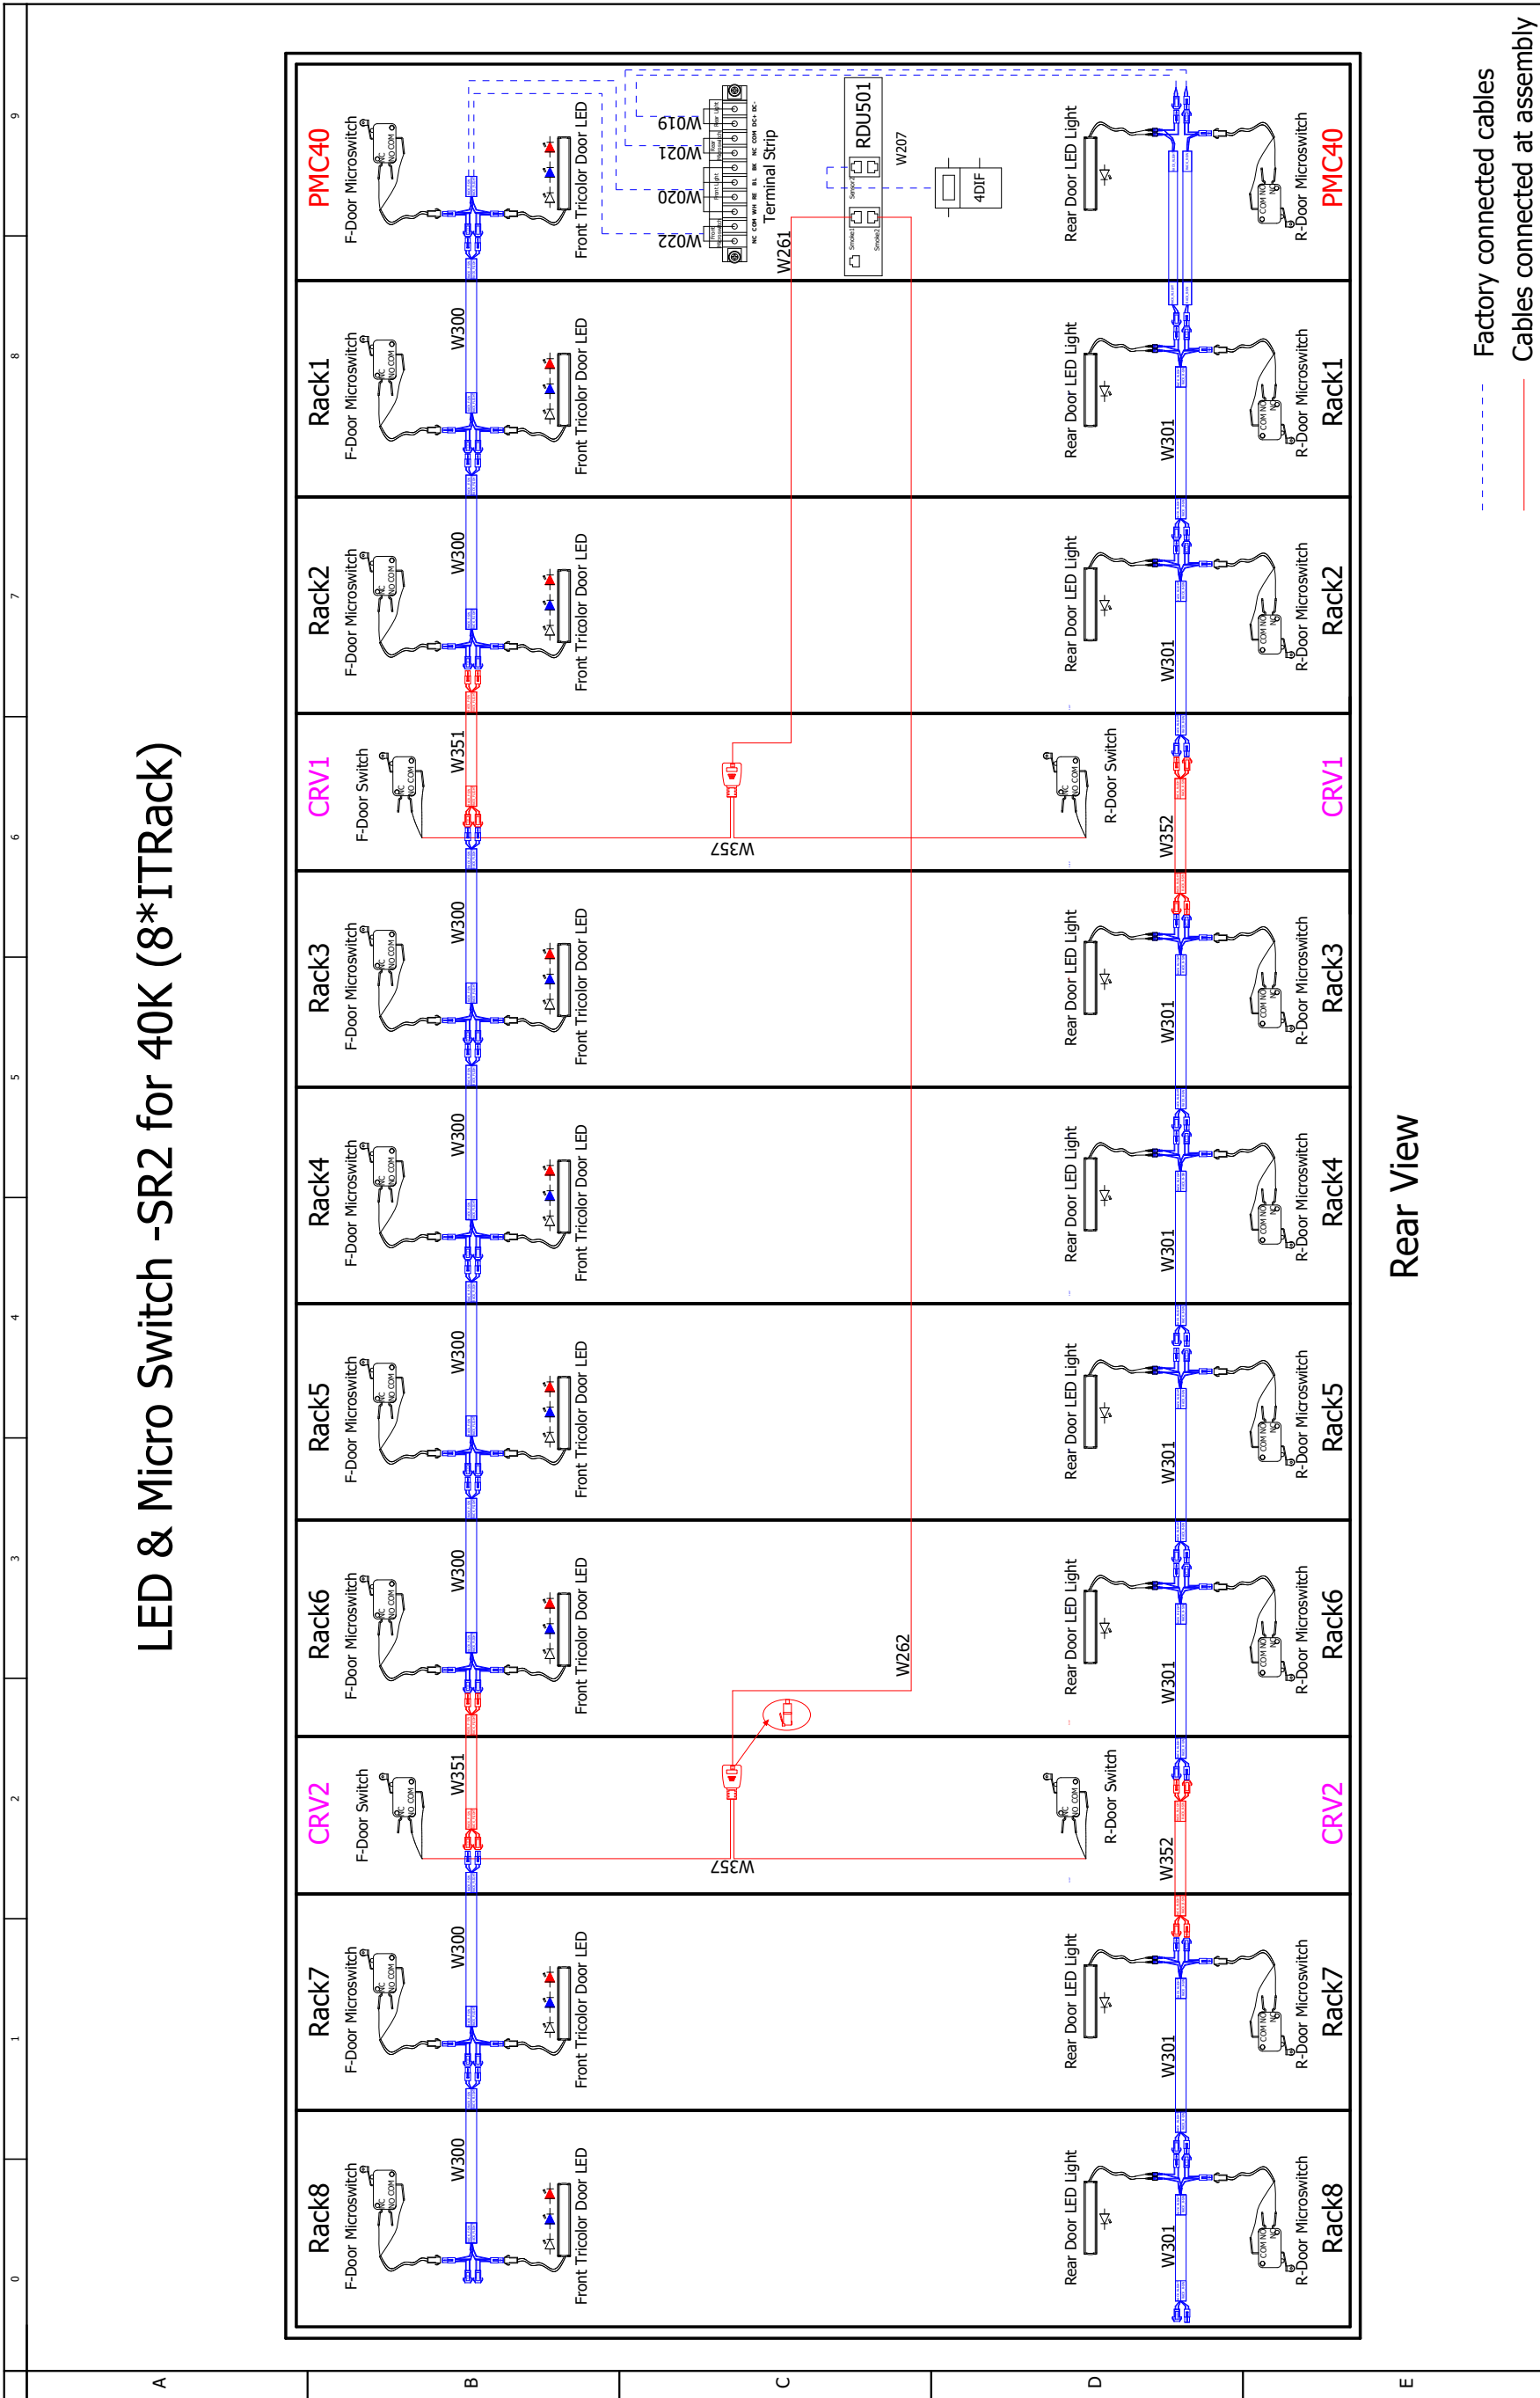


Factory connected cables

Cables connected at assembly

© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, RENT, LEASE, LOAN, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.



Fans & THDs -SR2 for 40K (8*ITRack)

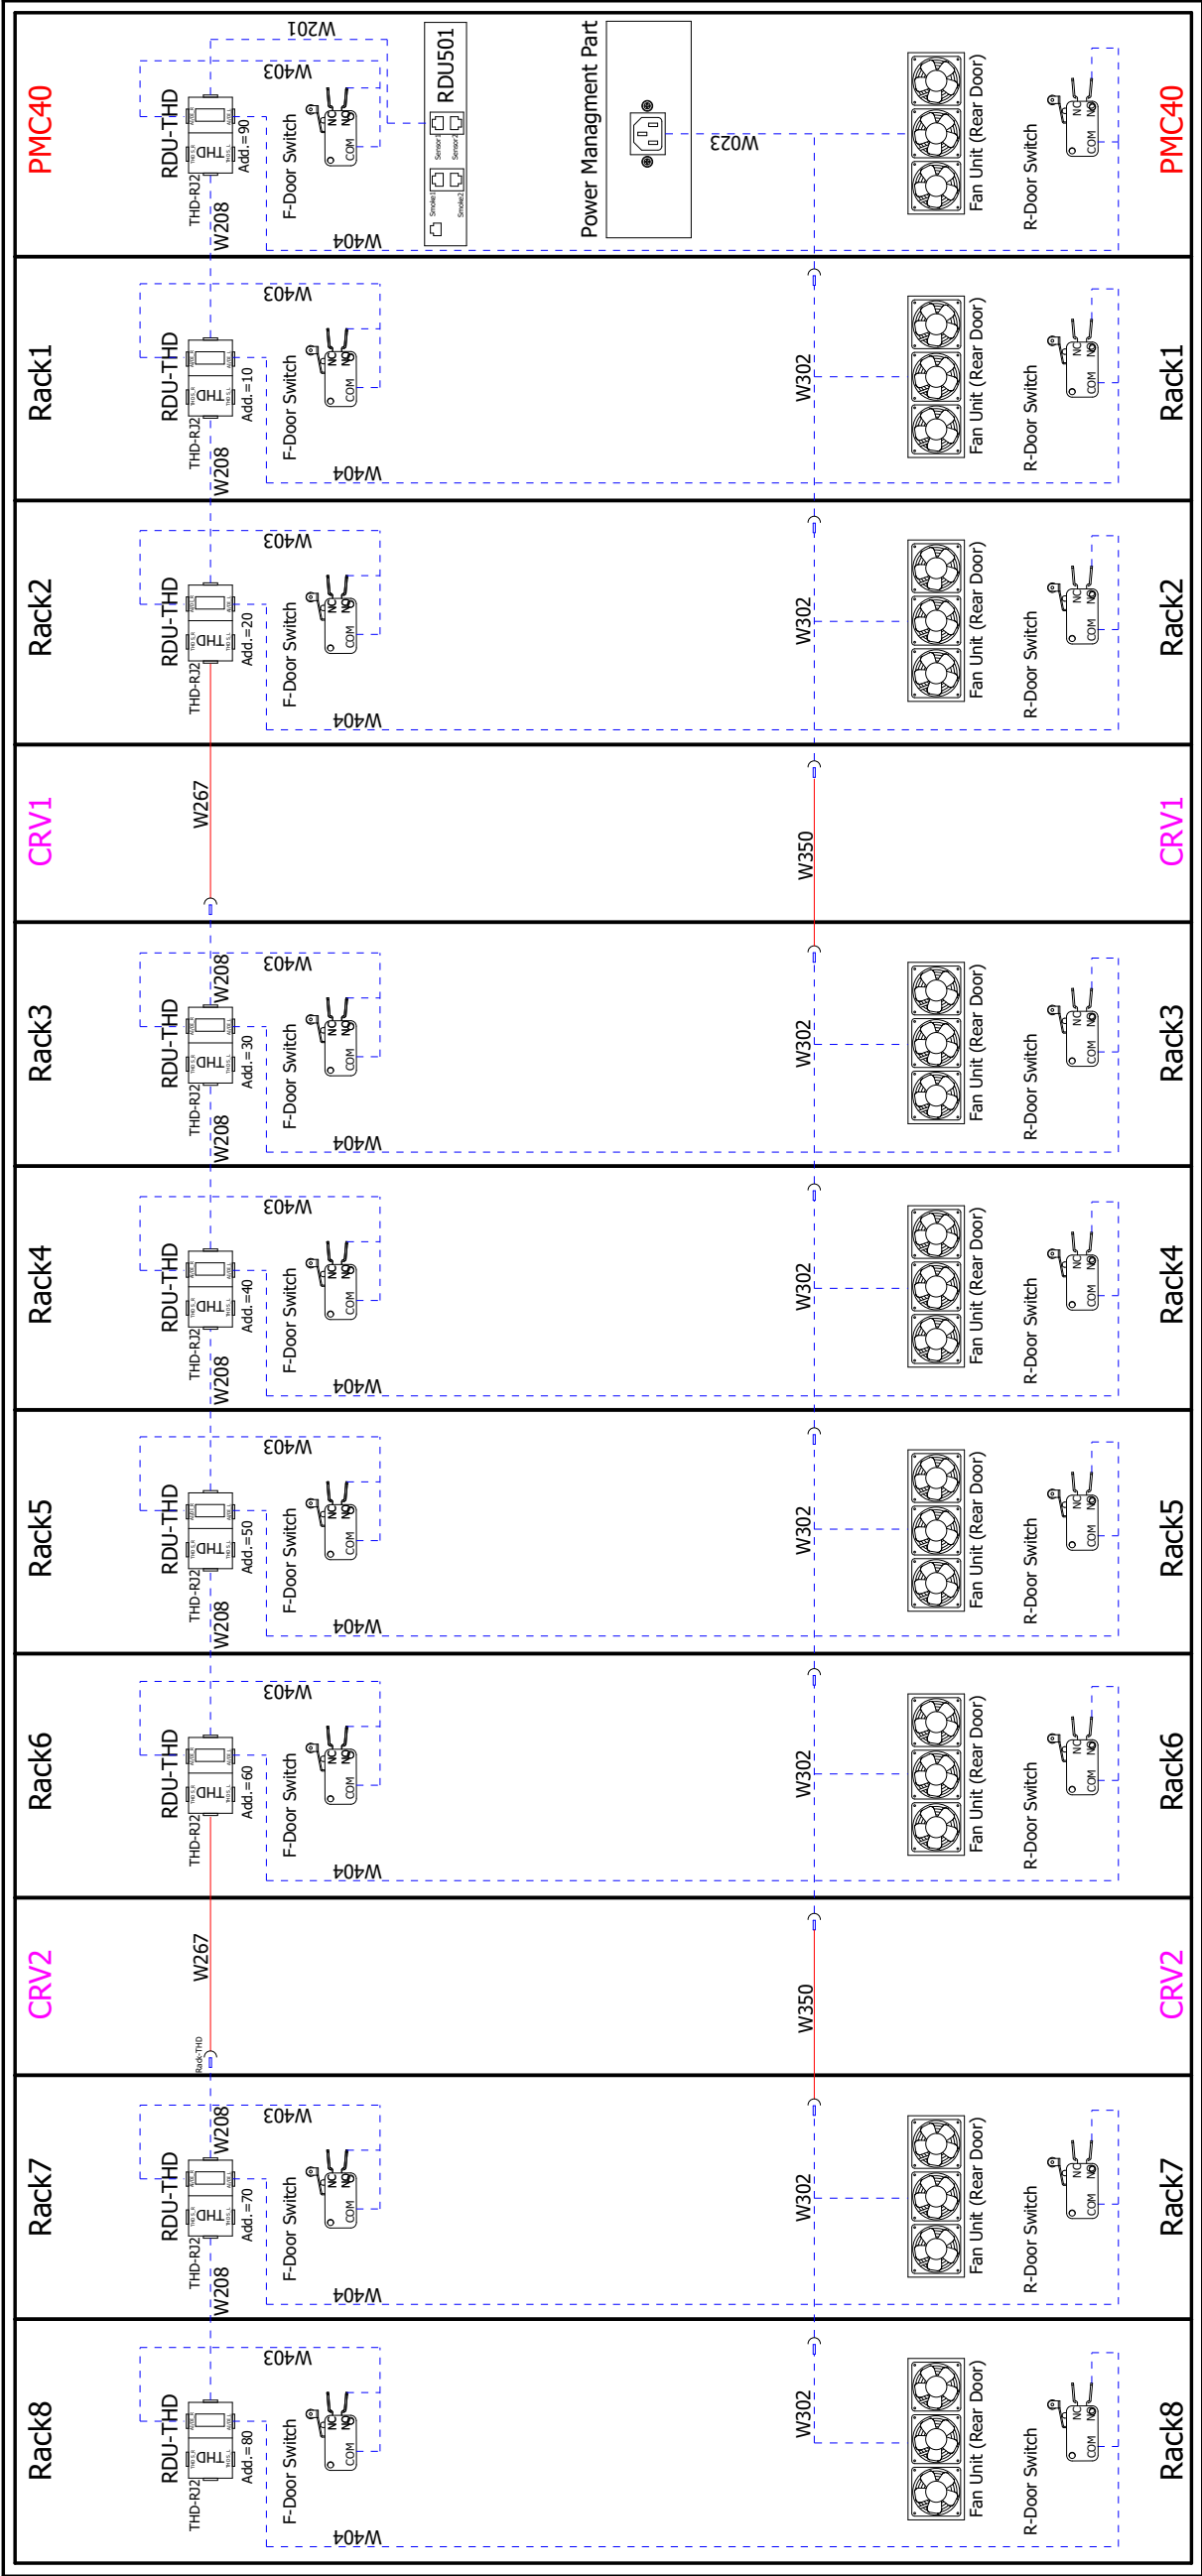

Factory connected cables
Cables connected at assembly

SHEET NO. 15 / 18		DRAWN BY: Nilesh Patil		© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND INFORMATION CONFIDENTIAL AND PROPRIETARY, AND WILL NOT REPRODUCE, COPIY, DISTRIBUTE, OR DISCLOSE IT TO ANY OTHER PARTY WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.			
CHANGE NO.		APPROVED BY: Petr Harant					
PAGE DESCRIPTION: 4.d - THD& Emergency Fan wiring diagram		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 8x IT Rack 40kW					
DWG NO. SR2N08040PAB1		DATE (LATEST REV.) 01.09.2026		REVISION:		505 N. CLEVELAND AVE WESTERVILLE OH 43081	
						 VERTIV™	



© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, TRANSMIT, OR OTHERWISE DISCLOSE IT TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.









4. Field Supplied Cable & Part List

[illegible]

6. Power Management Cabinet - 40kW (PMC40)

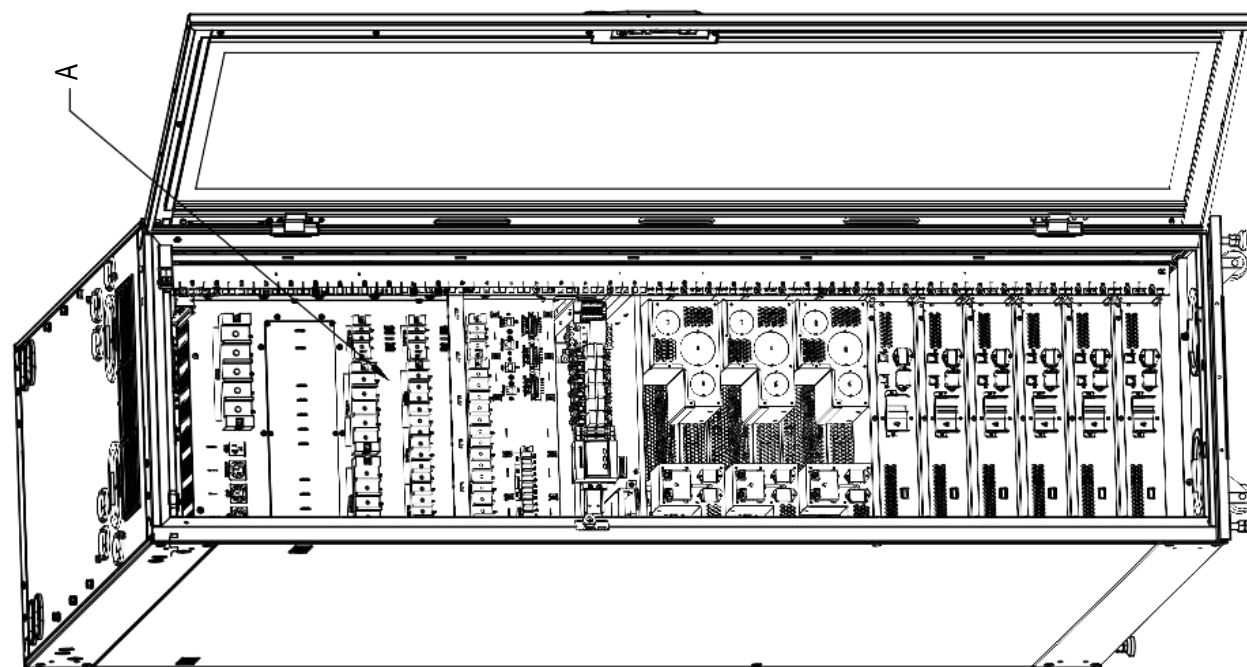

PMC40

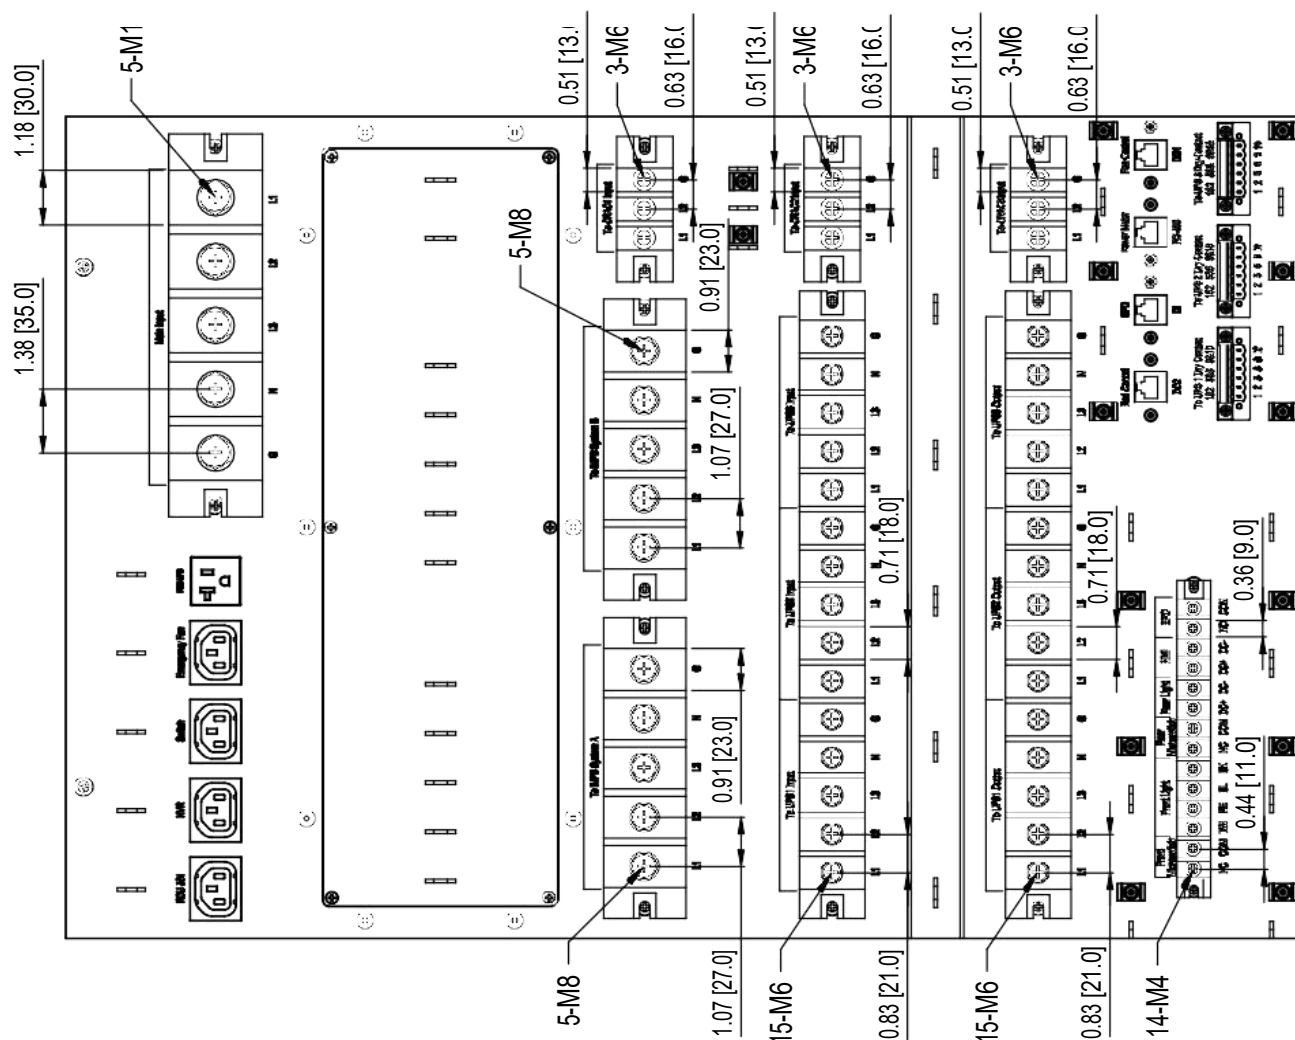


Detail A
(PMC40 terminal blocks size)


1 OF 1	NAME:	1. I, BRUCE, DO hereby certify that the information on this document is true and correct. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. 2. I, BRUCE, DO hereby certify that the information on this document is true and correct. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. 3. I, BRUCE, DO hereby certify that the information on this document is true and correct. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. 4. I, BRUCE, DO hereby certify that the information on this document is true and correct. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties. I understand that any false information on this document is a violation of the law and may result in criminal and civil penalties.	DATE:	PMC40
	SIGNATURE:		DATE:	DATE:
	NAME:		DATE:	DATE:
	NAME:		DATE:	DATE:

[illegible]


9. IMPB 4 BAR (T-IMPB-6.00-250-TPN-B-C1SKU)

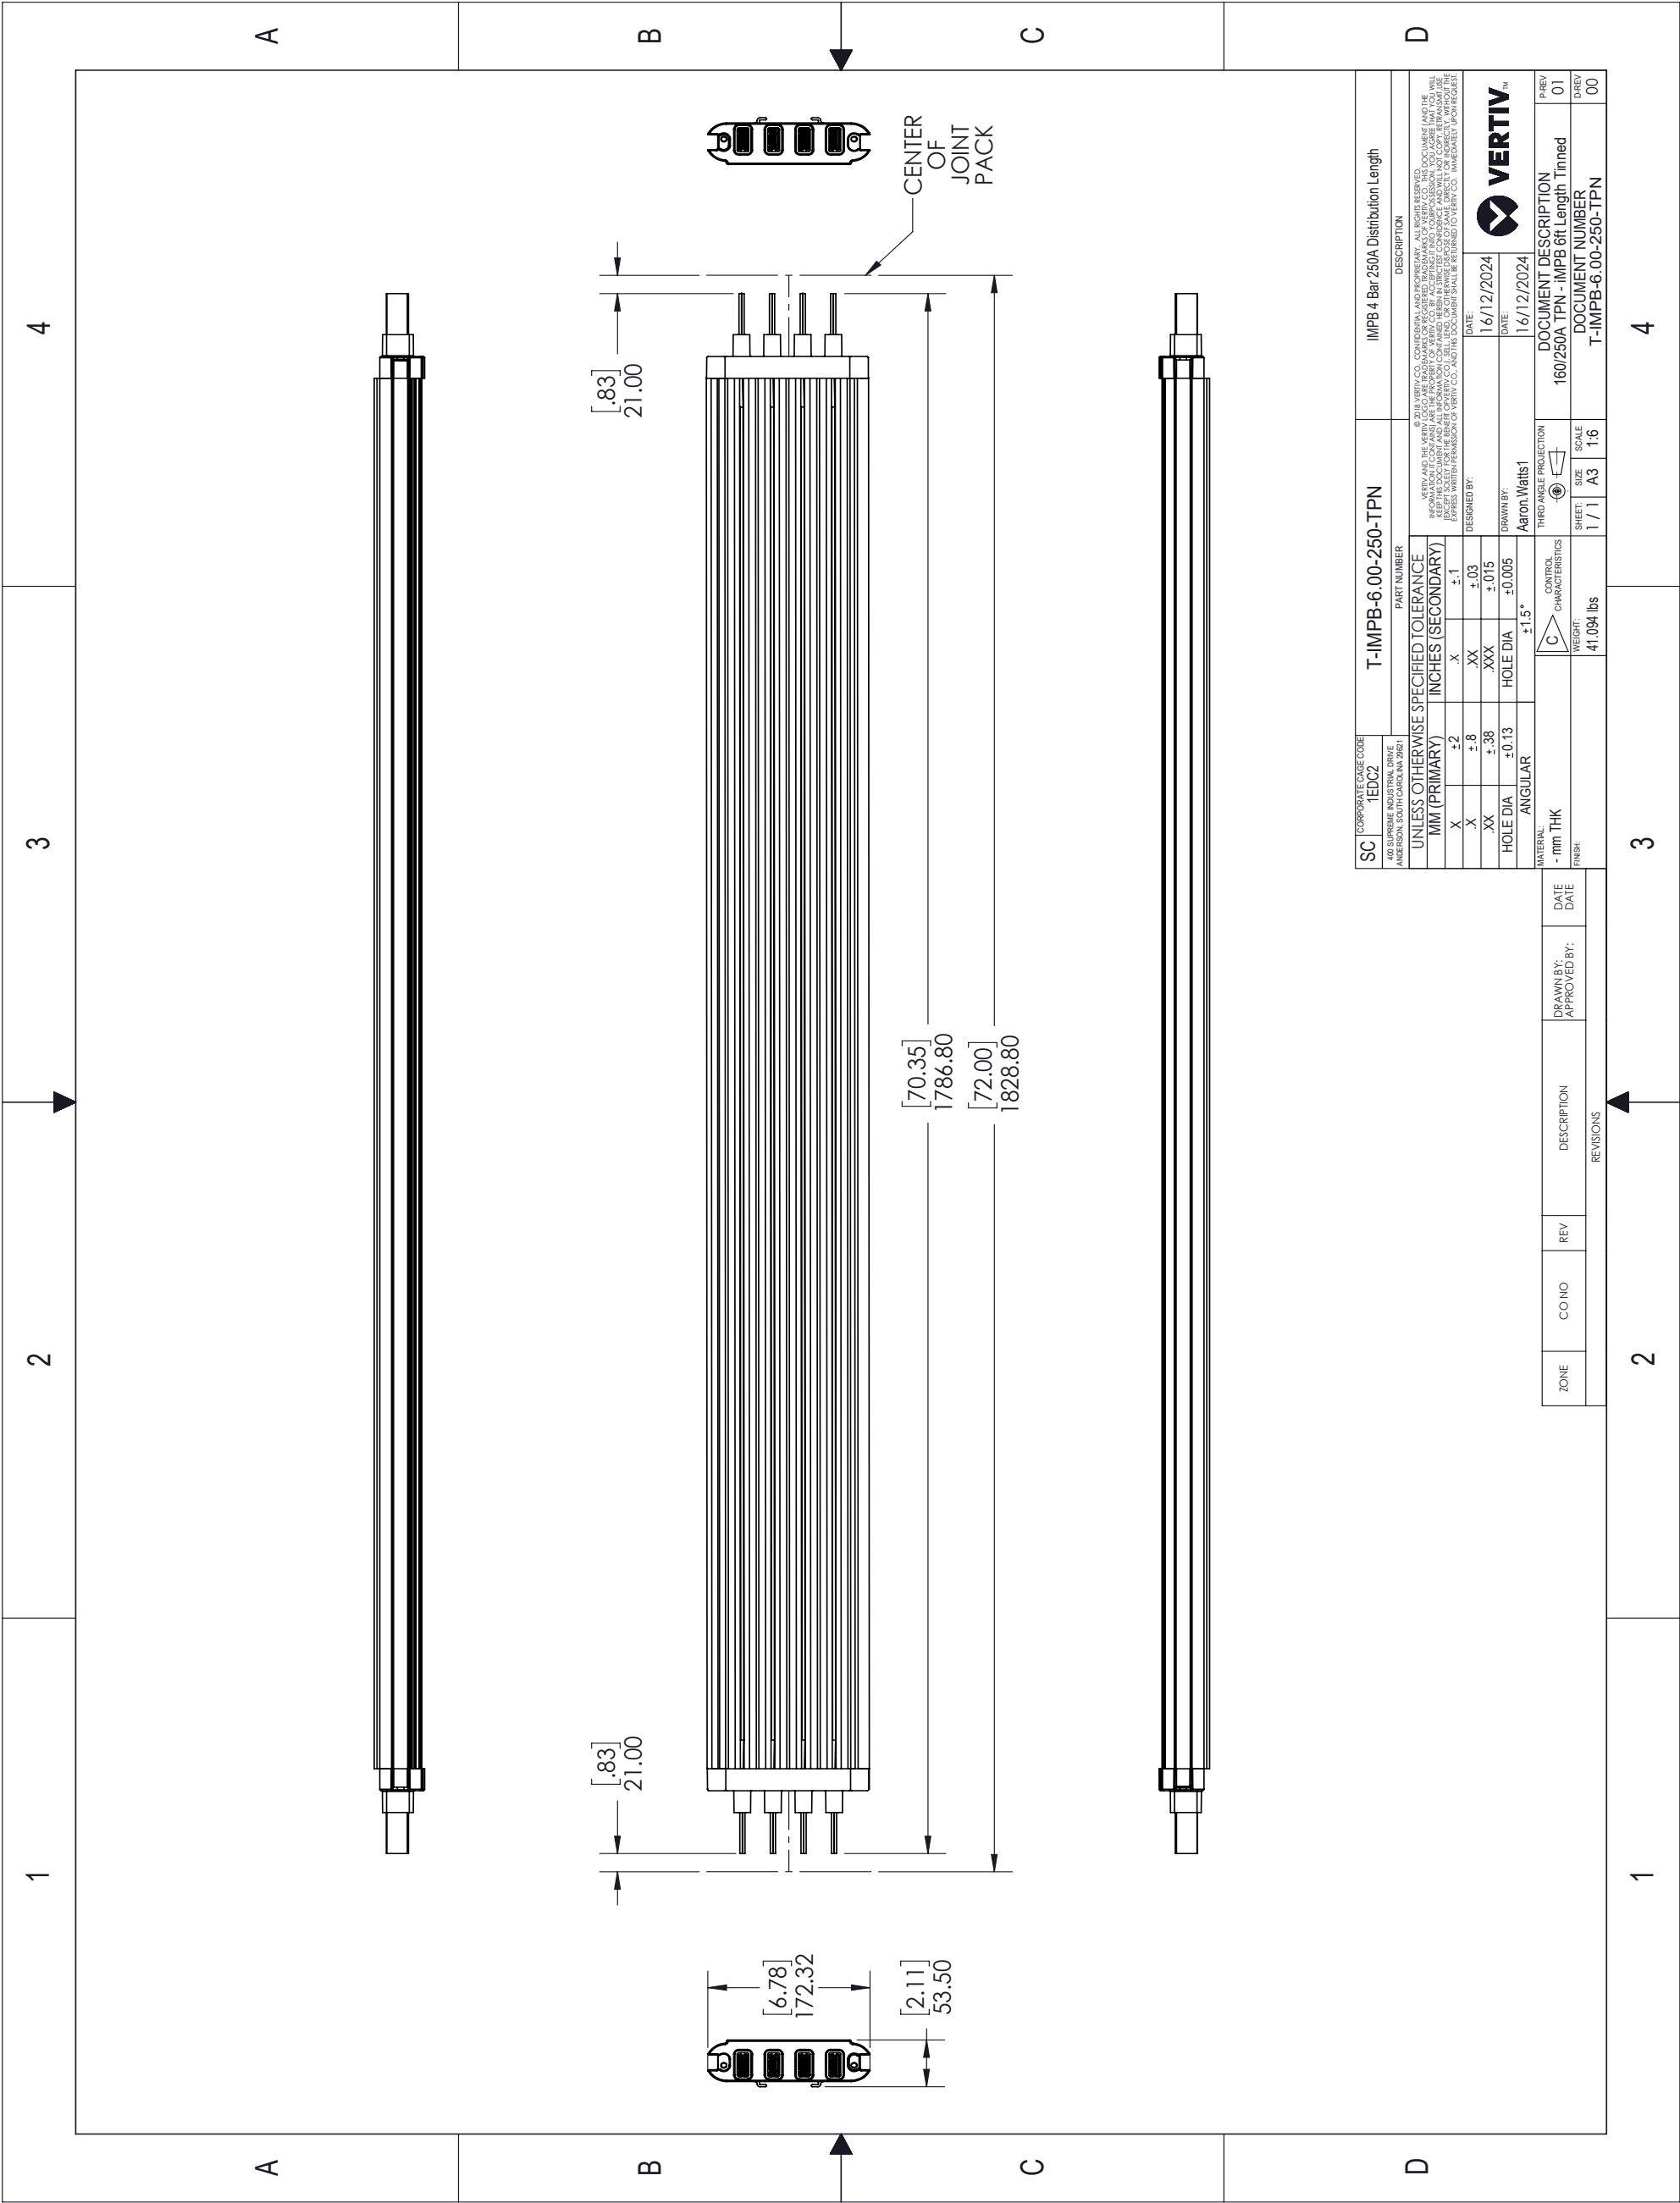

10. JOINT PACK (T-IMPB-JP-250-TPN-BE)

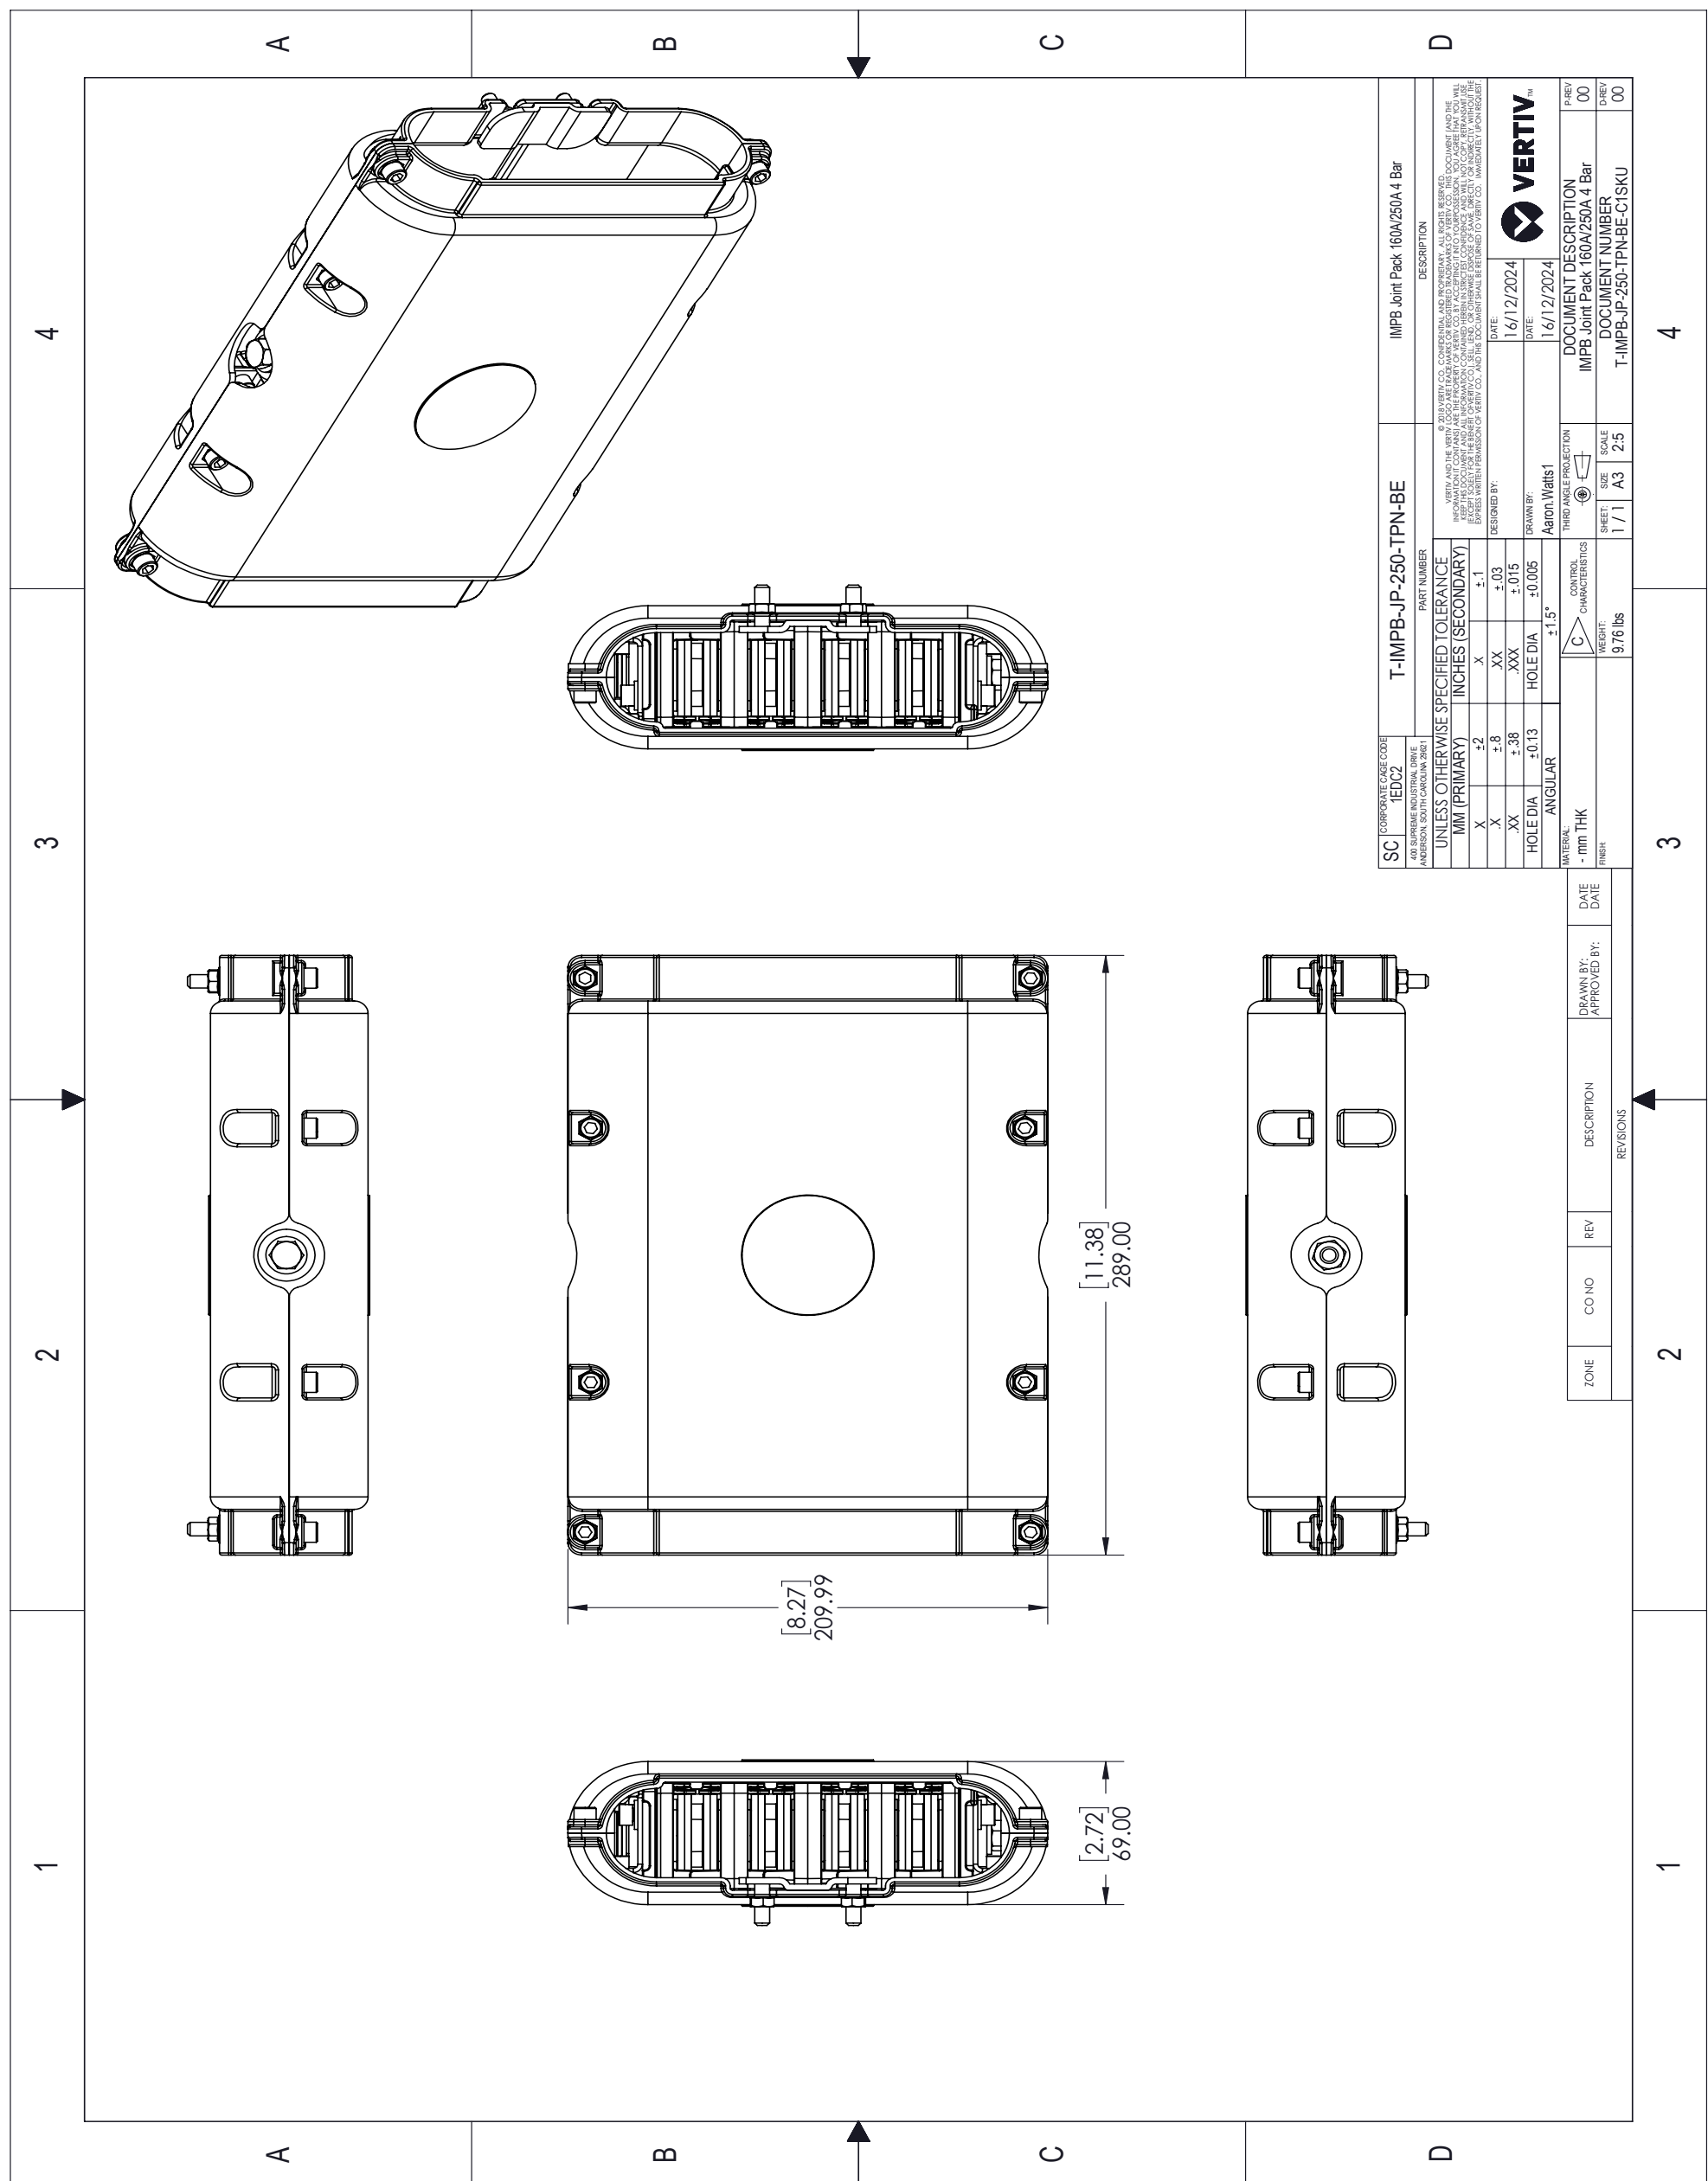


11. END CAP (IMPB-EC-4B-S)

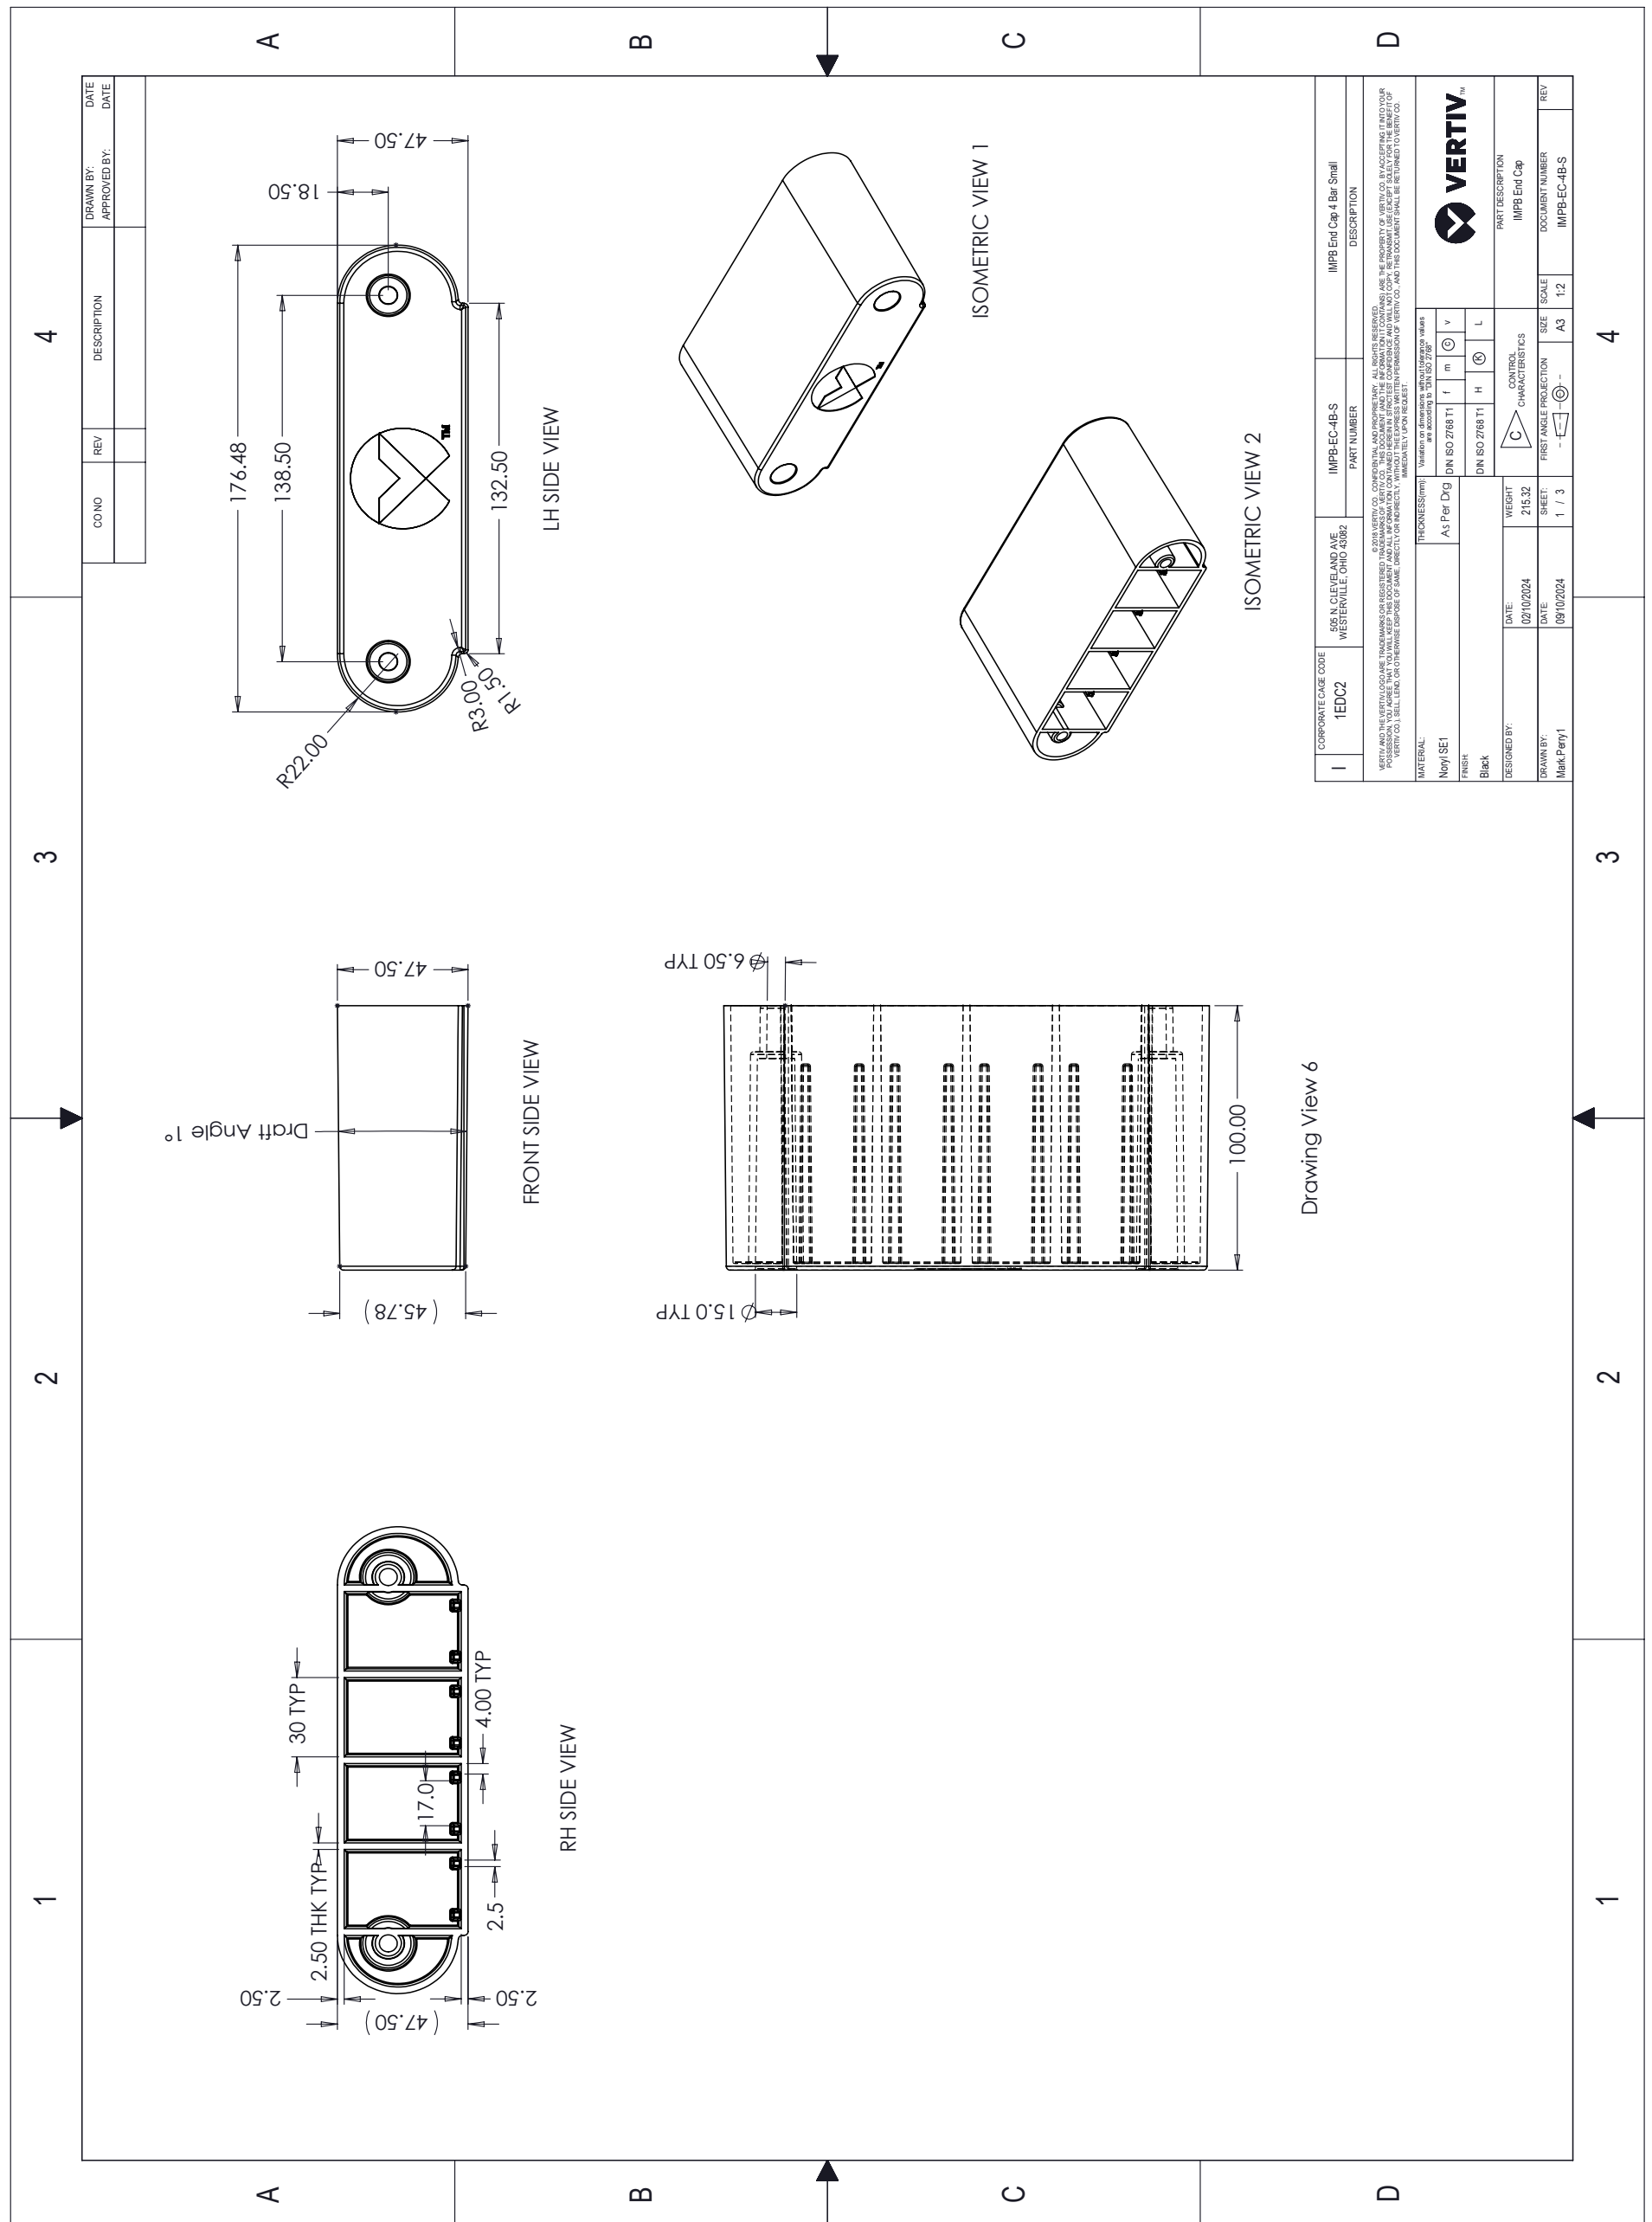


12. ROOF BRACKETS (C1 SKU IMPB-RMB-GA-001)

[illegible]


13. V3 TPN 3x 30A (C1 SKU V34BB1033042R0200N3C10S)

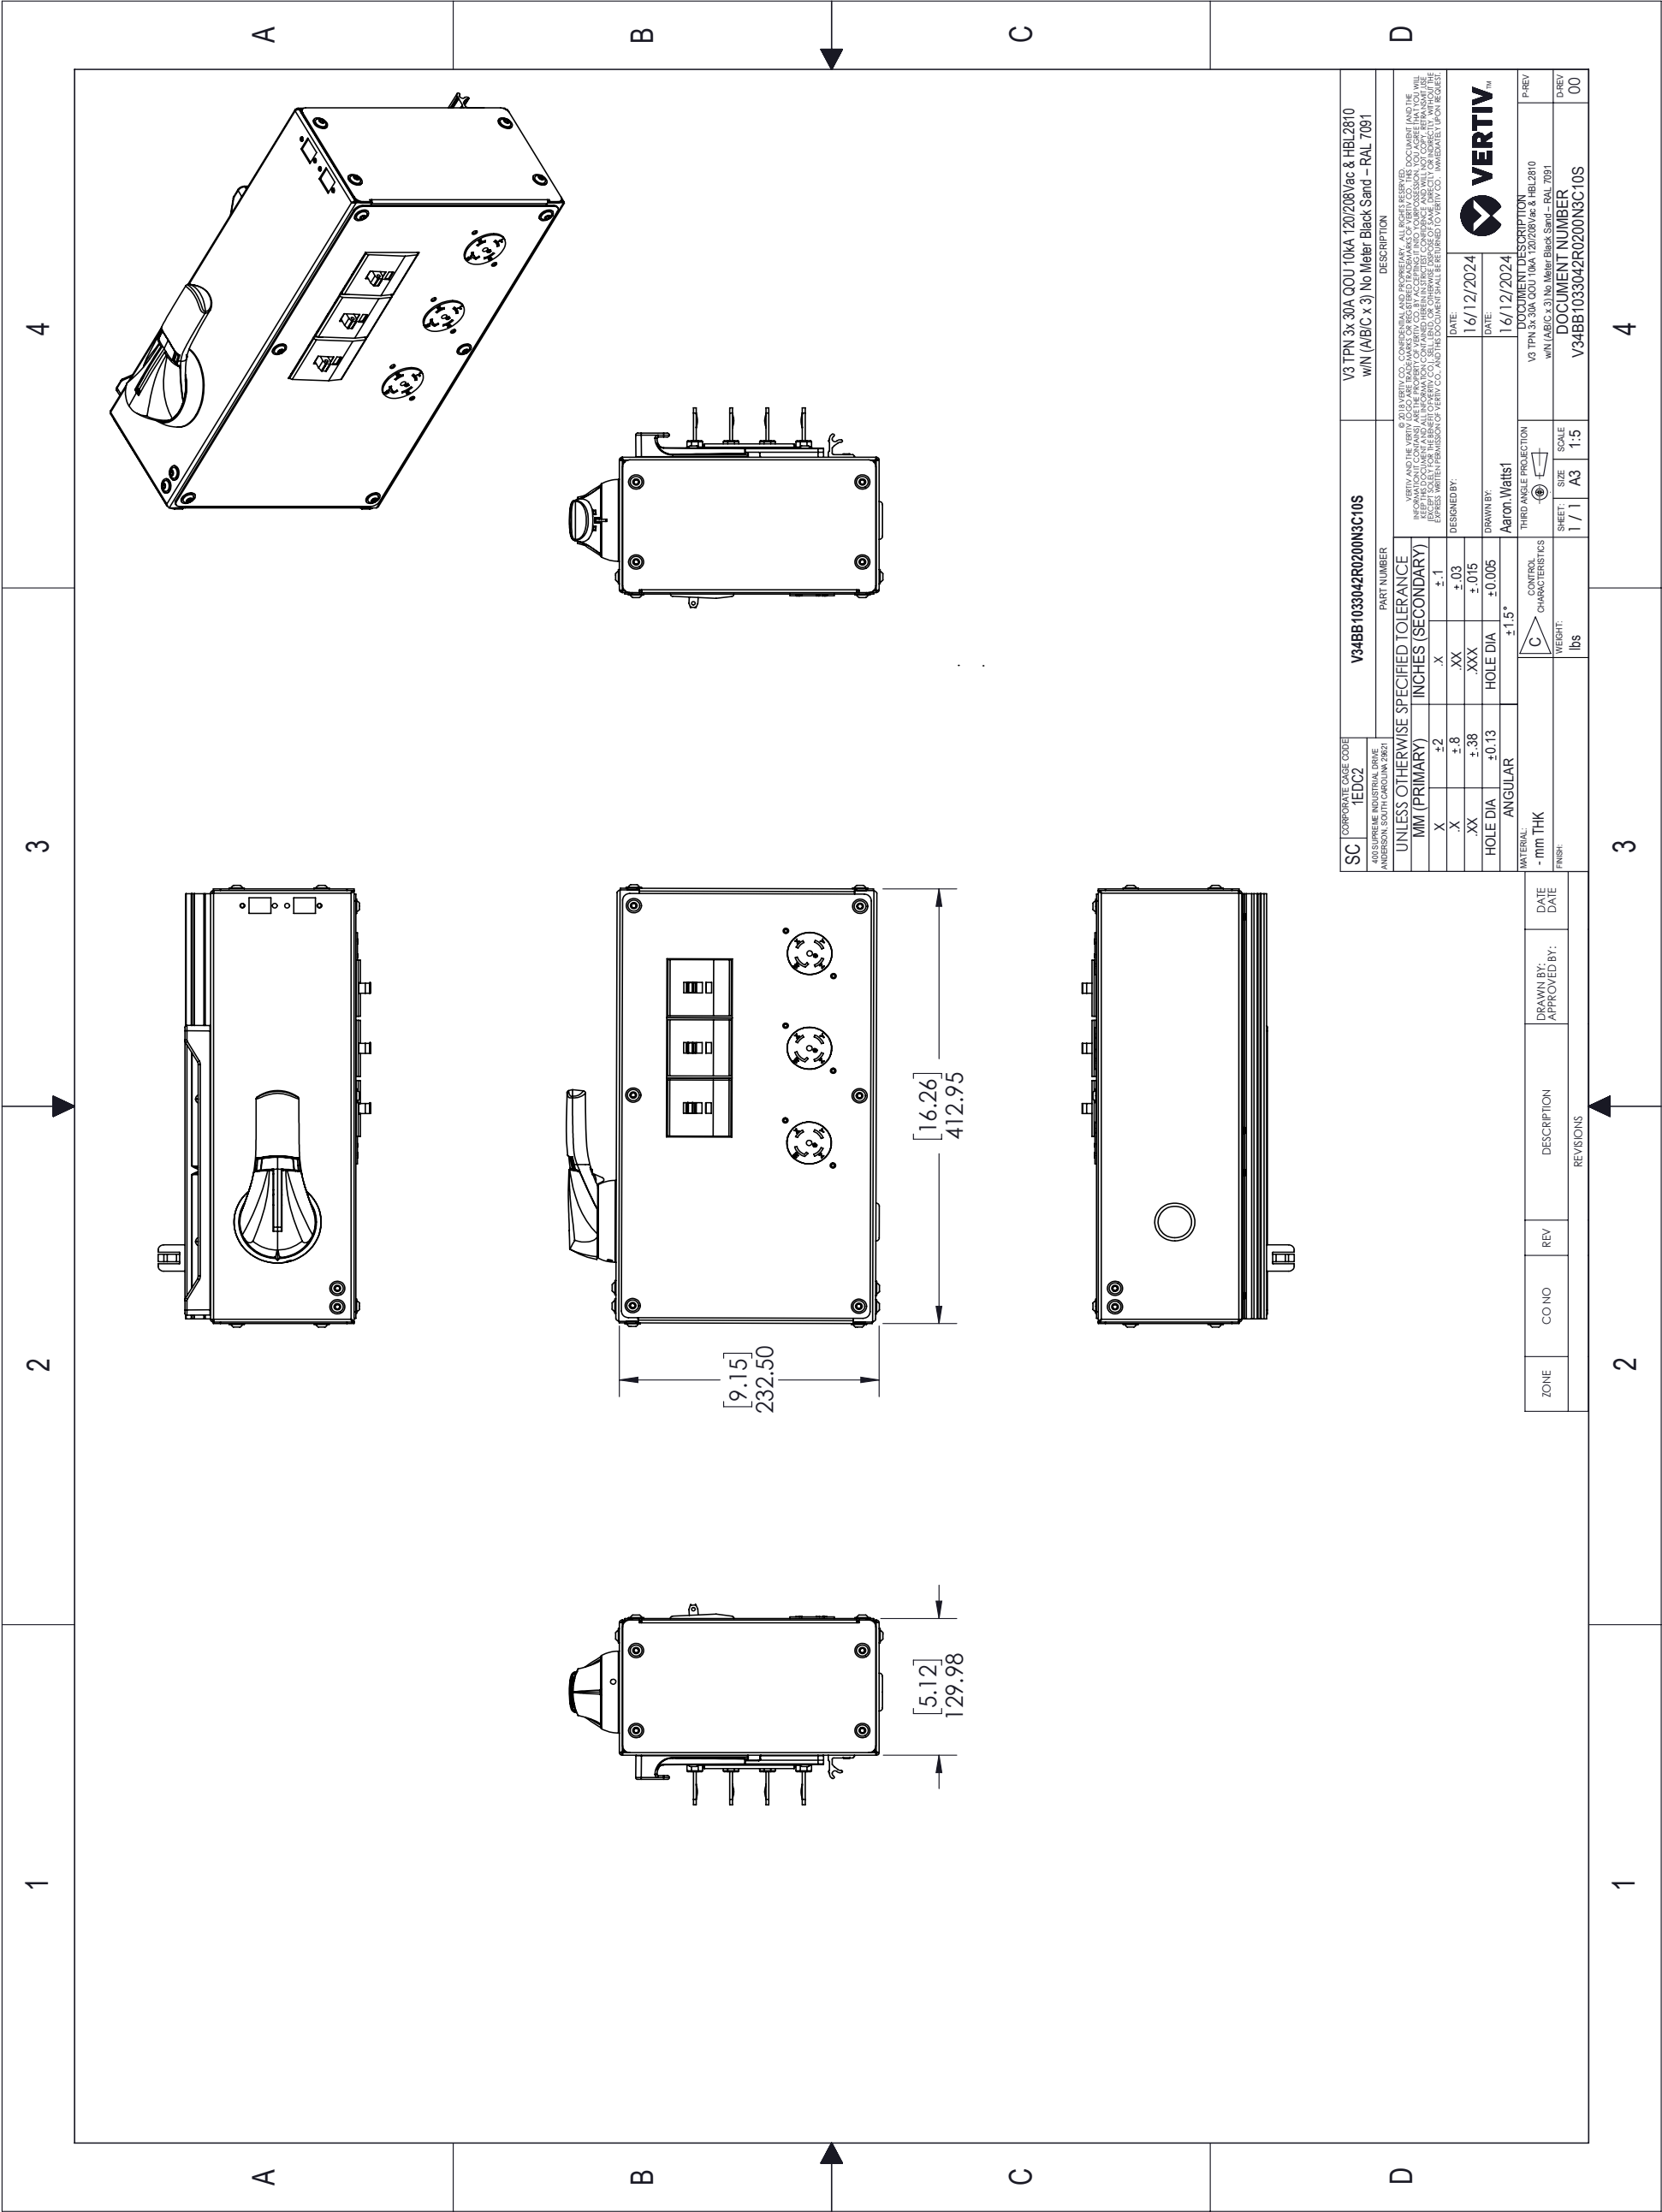

14. IMPB CEB 250A TPN (C25C4B208VN2000NNNW00GC)

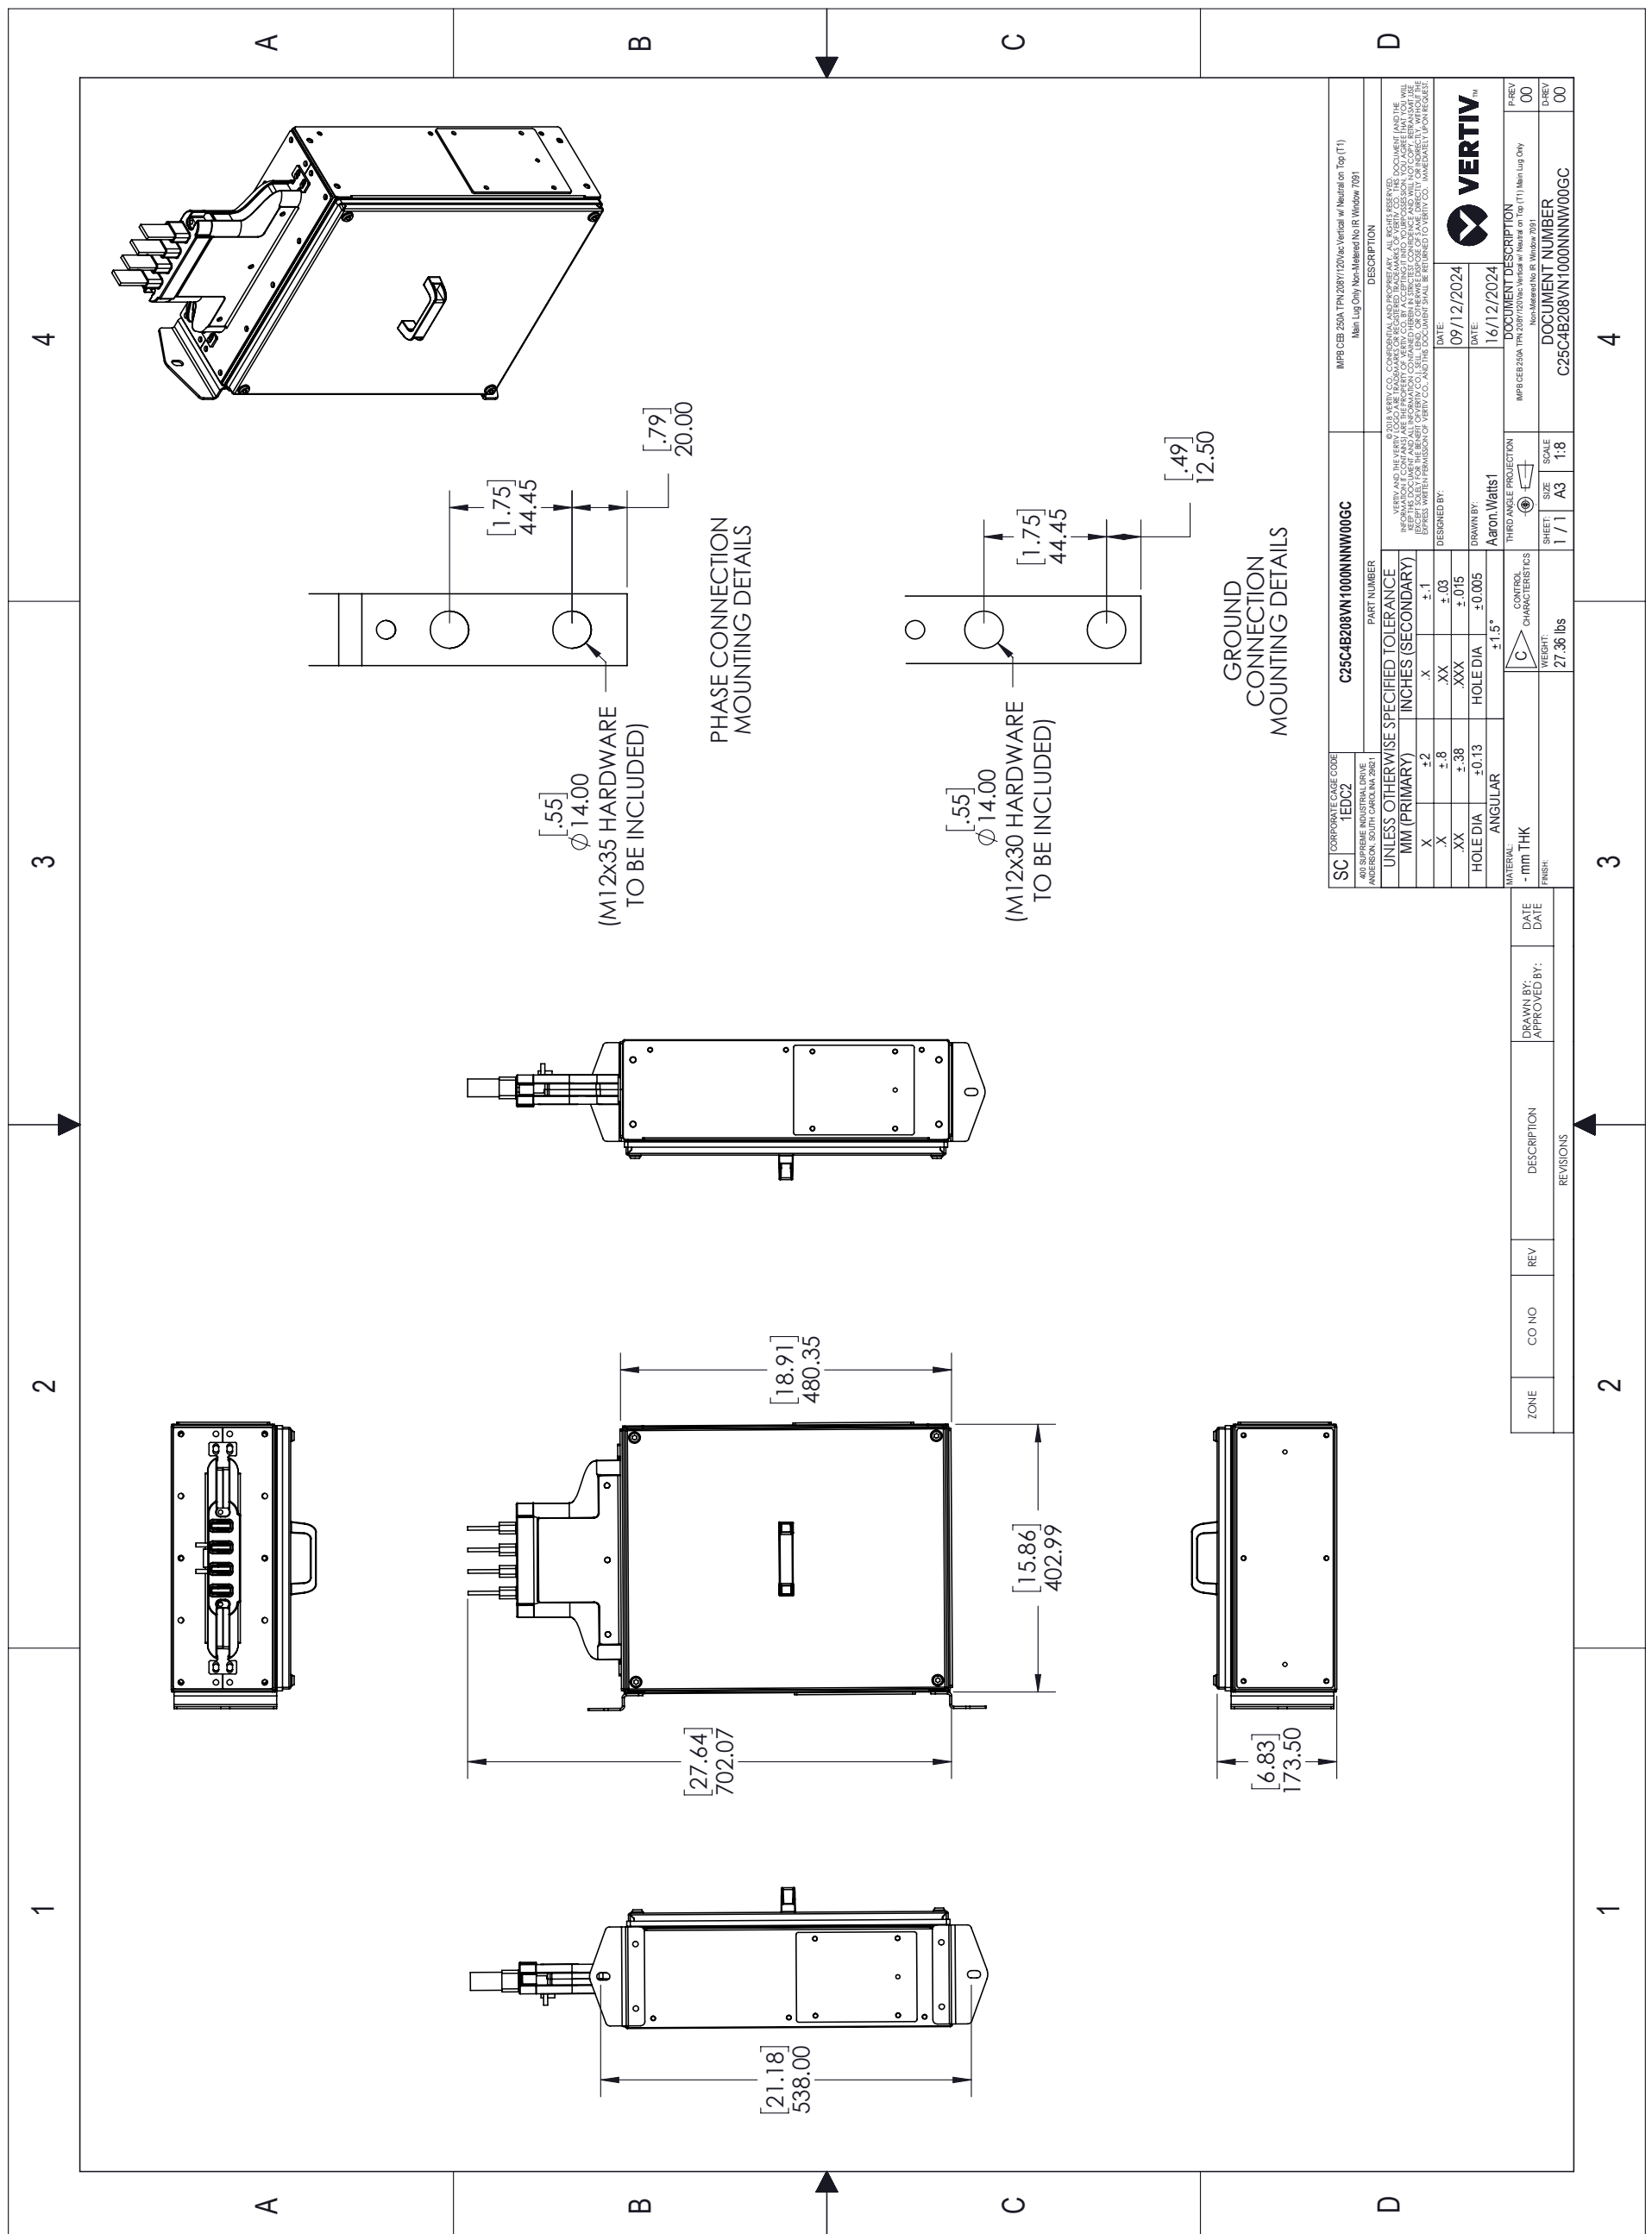

15. IMPB CEB 250A TPN (C25C4B208VN1000NNNW00GC)

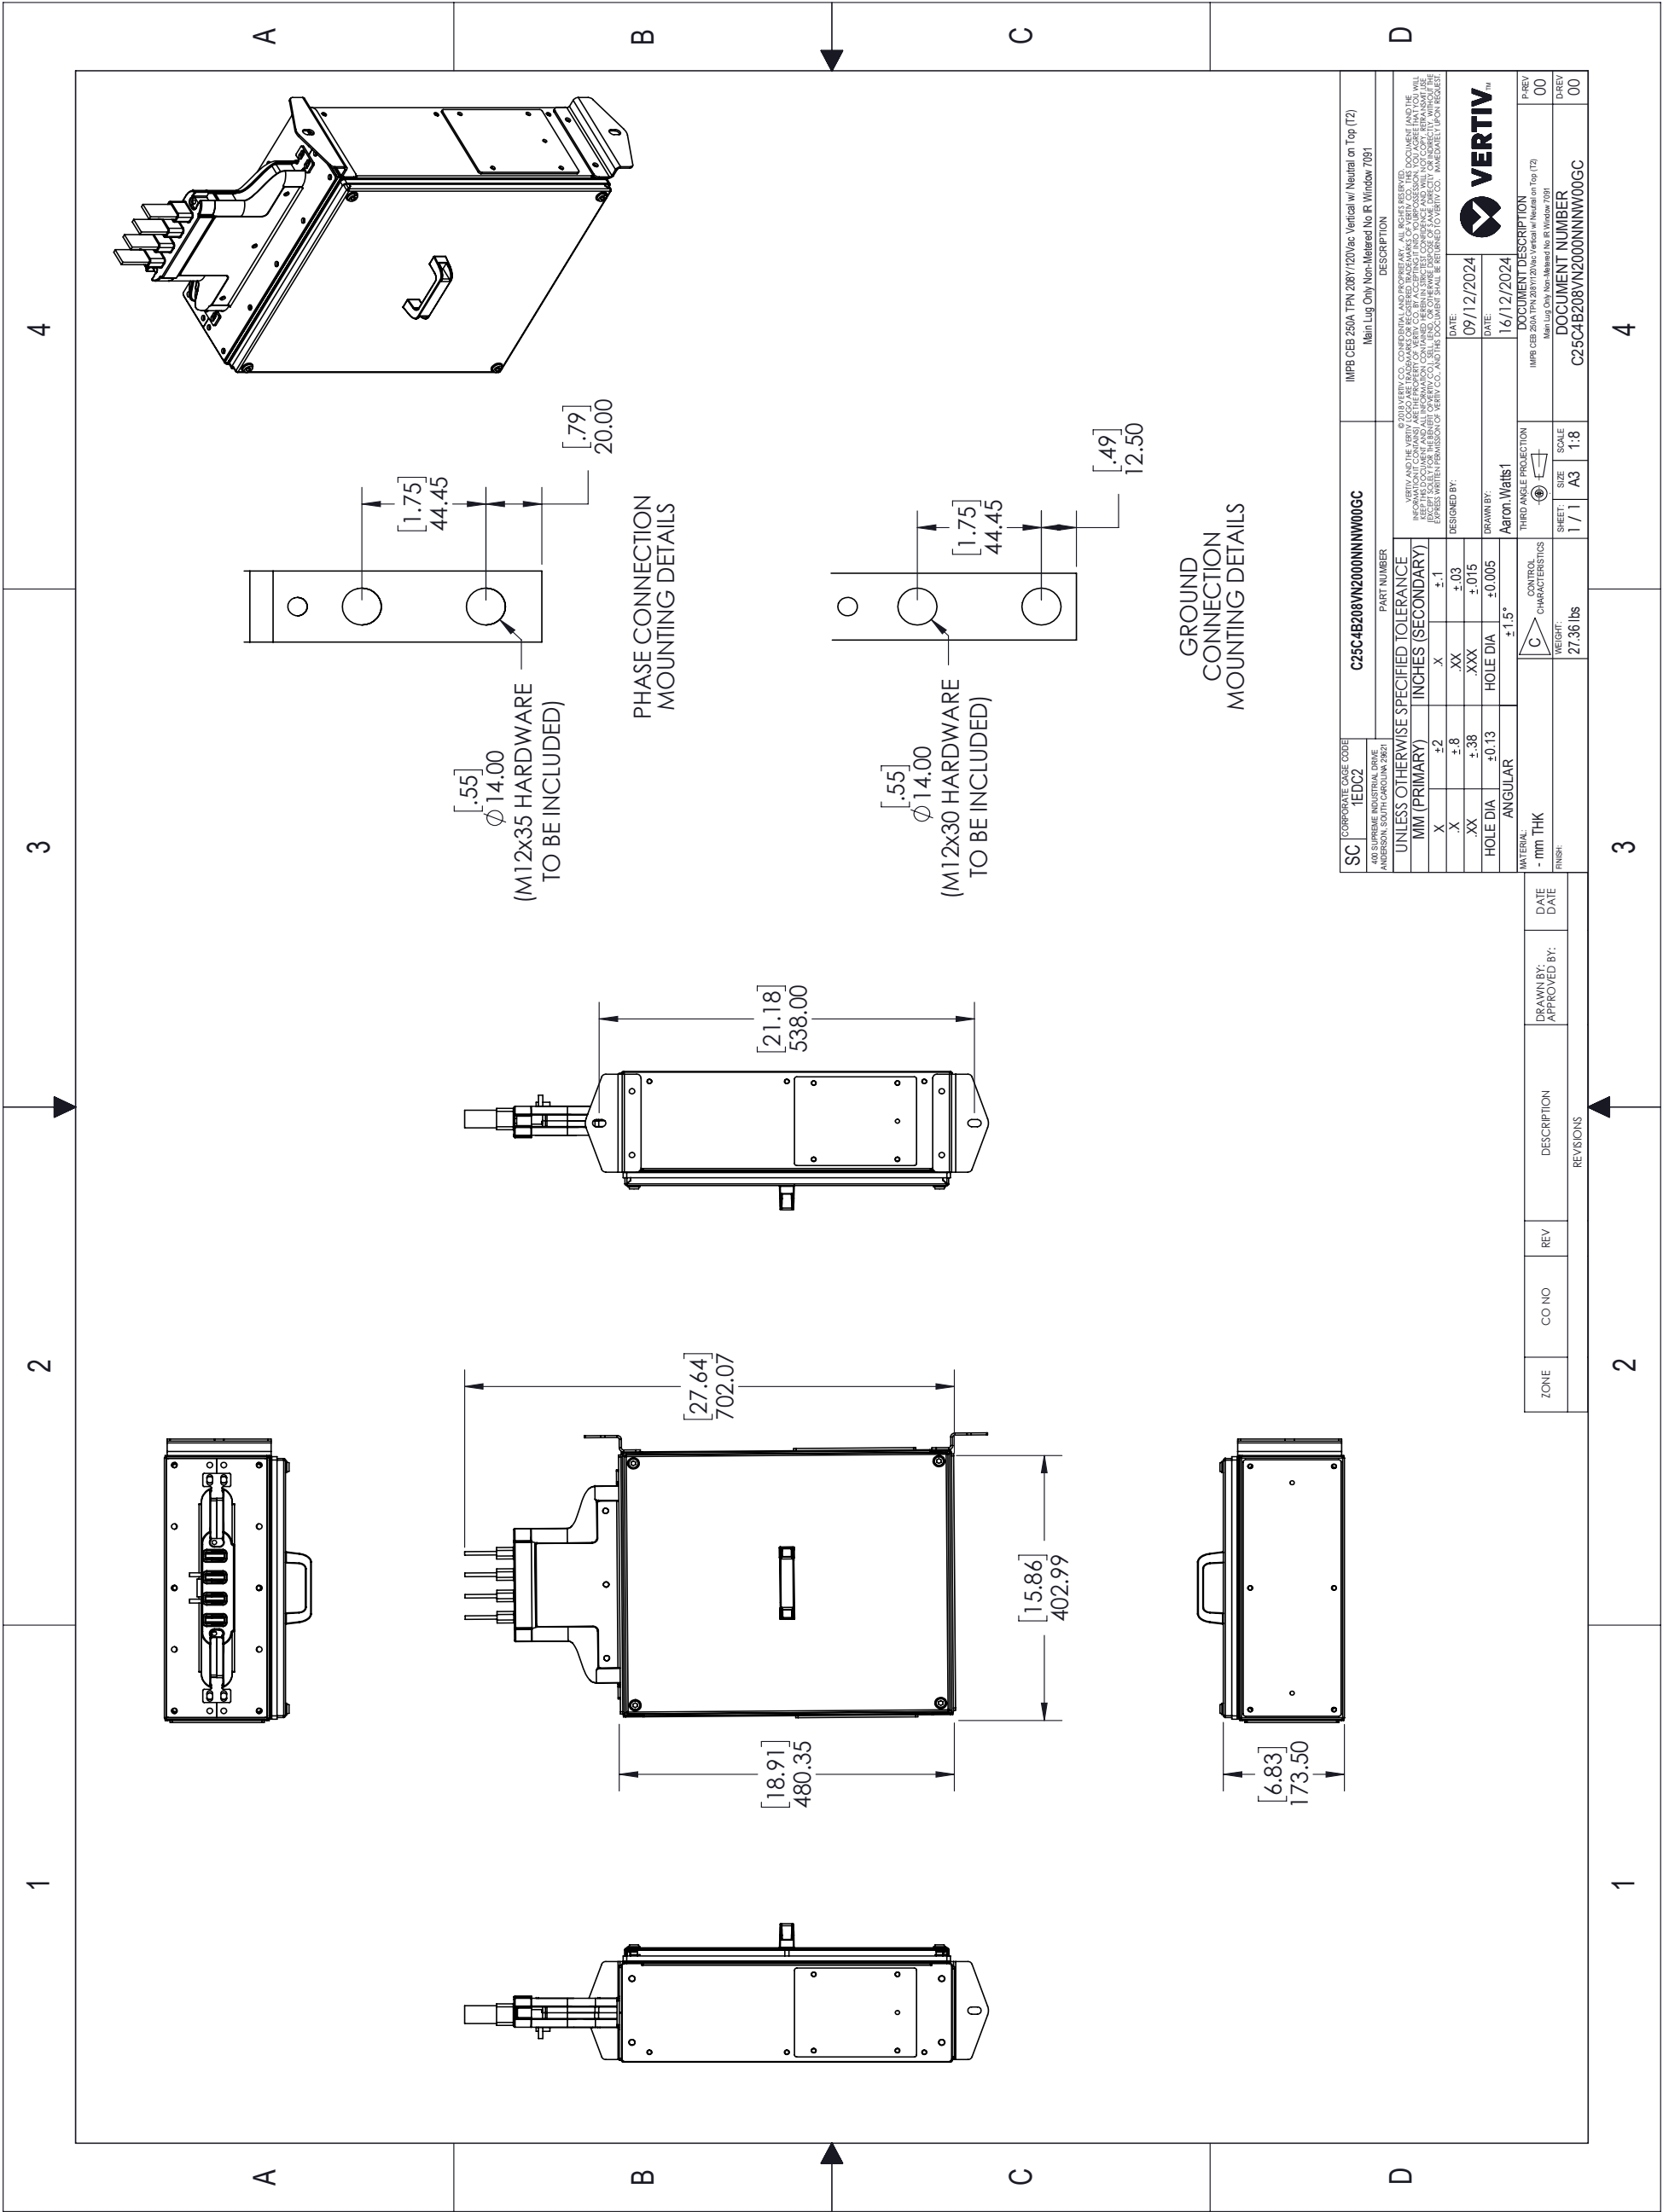

16. SCOPE OF WORK

SMART ROW 2 – ASSEMBLY & START-UP

SERVICE SUMMARY

Feature	Detail
On-site Service	One site trip within the 48 contiguous states to start-up the system. Visit to be scheduled by the customer between 8am-5pm, Monday-Friday (excluding national holidays).
Customer Support	Includes access to the Customer Resolution Center (1-800-543-2378) and the Vertiv Customer Services Network Online Internet portal for extent of product warranty.
Consolidation	The SmartRow2 includes numerous shippable units (typically pallets or boxes) that originate from multiple factories and suppliers. Vertiv consolidates these items into a single customer shipment and reduces the likelihood of shippable units being lost at the customer site. This benefits the customer by relieving the burden of keeping track of multiple partial shipments.
Inside Delivery	Vertiv Service will move the shippable units from the delivery truck to the Staging Area. Vertiv Services will unpackage the shippable units and remove/dispose of the packaging material so that it is ready for assembly. Vertiv will verify that all material on the sales order has been received.
Project Management	Included with Consolidation and Inside Delivery. Vertiv will assign a project manager for the project. The Project Manager will supervise the Consolidation and Inside Delivery Process and communicate hardware shipment schedules with the customer.
Assembly	SmartRow2 is assembled onsite by Vertiv factory-trained and authorized technicians equipped with Vertiv. Proprietary tools and software. Vertiv CEs and Vertiv Partners are the only approved OEM service providers for Vertiv products. These technicians are supervised by a Site Manager who also gathers site- specific requirements like safety and work procedures.
Factory Startup	Warranty inspection and startup validates the warranty and initializes the warranty coverage period.

SERVICE PERFORMED

Consolidated Shipment

Shippable units may be available at time of order or built-to-order with a lead time. Vertiv safely stores these items in-warehouse until the customer is ready to receive the SmartRow2 in a single shipment. Other limits may apply; see Assumption and Clarifications as applicable for more details.

Inside Delivery

Vertiv Services will deliver the shippable units from the delivery truck to the Staging Area. Vertiv Services will unpackage the shippable units and remove/dispose of the packaging material so that it is ready for assembly. Vertiv will verify that all material has been received.

Change order option:

- There must be an appropriate loading dock with continuous, level floor from the dock to the staging area. If the shippable units must be moved up/downstairs, the customer must provide a suitable elevator, or charges for special rigging will be incurred. If the customer does not have an appropriate loading dock, nominal charges may/ may-not apply for a lift-truck delivery.

Project Management

Vertiv will assign a project manager and a site manager for the project.

The Project Manager will supervise the Consolidation and Inside Delivery Process and communicate schedules with the customer.

The Site Manager will supervise the assembly, startup, warranty inspection and turn over the SmartRow2 to the customer.

Site-Specific Requirements

All personnel will be available for up to two hours per week for Site Access, Safety Training, and other site-specific requirements.

Change Order Option:

- Vertiv can quote a price for additional man-hours if 2 hours per week is insufficient.

Assembly

There shall be continuous, level floor between the Staging Area and the Installation Location so that heavy items can be moved via casters/pallet jacks.

Change Order Option:

- If there is not continuous level floor, the customer must provide or pay for any necessary lift/rigging equipment.

Vertiv PMC, including RDU501 SmartRow2 Controller/Display

Vertiv will position, level, and bay together the PMC as described in the submittal documents. The customer is responsible for providing primary electrical power to the PMC.

Vertiv will program and configure the SmartRow2 RDU501 controller/display. This includes setting IP addresses so that the customer can monitor the system status remotely.

Change Order Option:

- Vertiv will quote IP addressing of equipment on the customer network, but this would be done by other personnel and scheduled separately. This is outside the scope of SmartRow2 assembly.

Vertiv IT Rack(s)

Vertiv will position, level, and bay together the Vertiv IT Racks as described in the submittal documents. Vertiv will not populate racks with customer IT gear, including blanking panels, servers, shelves, etc.

The customer must define addressing conventions (1,2,3,4, right-to-left or left-to-right) prior to start of work.

Cable Trays

Vertiv will install the SmartRow2 cable trays that are included with the SmartRow2 solution as described in the submittal documents.

Liebert® CRV's, Temperature Sensors, Modbus cables, and associated Plenums

Vertiv will position and level the Liebert® CRV and attach the associated plenums to provide cooling to the SmartRow2.

Vertiv will connect the necessary temperature sensors.

The customer is responsible for piping and primary power to the CRV along with connecting CANBus cable between the CRV and heat rejection. All specific requirements (such as piping traps and proper electrical grounding) for correct product installation are detailed in the product installation manual.

After the SmartRow2 is assembled and the Liebert® CRV is piped and powered by the customer in accordance with the product installation manual, Vertiv will perform a factory warranty inspection along with the rest of the SmartRow2.

Liebert® MC / CCD Condensers for Liebert® CRVs

The customer is responsible for installing the associated heat rejection. This includes primary power, CANBus communication wire, piping, refrigerant charging, and all other tasks in the Installation Manual. Any/all penetration points in the walls/ceilings/floors for any wiring or piping are also the customer's responsibility.

Rack PDUs

Vertiv will install and connect all rack PDUs (if applicable) including GXT5 power extensions (if applicable) as described in the submittal documents.

Liebert® GXT5 Single Phase UPS

Vertiv will install and connect all Liebert® GXT5 UPS's and connect power within the PMC cabinet and output to the PDUs as described in the submittal documents.

Additionally, Vertiv will install ancillary equipment such as Maintenance bypass and PD2-103 cabling and connectors if not already preinstalled.

After the SmartRow2 is assembled and Primary Power to the SmartRow2 is provided by the customer, Vertiv will perform factory startup of all GXT5 equipment along with the rest of the SmartRow2.

Switch

Vertiv will install and connect the switch within the PMC cabinet. as described in the submittal documents.

Firmware Updates

Vertiv will update firmware of any/all units to the current revision level. Shippable units are sourced globally, and firmware evolves as products may be in stock with prior revisions.

Wiring

Vertiv will run all necessary wiring for power and communication between cabinets as part of assembly. This includes setting IP/DIP switch settings for proper communication between the device and the PMC.

Accessories

The SmartRow2 is available with lights, door locks/sensors, temperature sensors that Vertiv will connect and install. Services associated with cameras are sold separately and out-of-scope for the SmartRow2 Assembly

RDU Monitor SmartRow2 mobile application.

Services associated with the RDU Monitor SmartRow2 mobile applications are quoted separately and out-of-scope for SmartRow2 assembly.

Fire Suppression Cabinet Assembly (if Applicable)

Vertiv will unpackage the Fire Suppression cabinet so that it is ready for installation.

Position level and bolt together the Fire Suppression cabinet to the adjoining cabinets.

Ensure all the wirings are connected, according to the information available in the submittal documents.

Install the piping in all the other cabinets in accordance with system drawings.

CUSTOMER RESPONSIBILITIES

In order to provide timely, accurate and thorough execution of the services described herein, Vertiv requests the following:

- Point of Contact: Provide an authorized point of contact(s), specific for the scope of work, for scheduling and coordination purposes.
- Scheduling: Make dates available for scheduling service. All visits must be requested 4 weeks in advance for assembly and 10 days for startup/warranty-inspection of need by contacting the Vertiv Project Manager. Site must be available for 5 consecutive business days. Customer may choose to pay for premium time if weekend work is necessary.
- Site Access: Prior to time of scheduled work, provide site access including any customer required escort, security clearance, safety training and badging for Vertiv personnel.
- Equipment Access: Convenient access to the equipment covered by the Scope of Work. Prior to scheduled time of work, notify Vertiv personnel of any special requirements for equipment access including lifts, ladders, etc.
- Shutdown: Service may require shutdown of load to ensure electrical connection integrity.
- Notification: If for any reason the work cannot be performed during scheduled time, notify Vertiv personnel 24-hours prior to scheduled event.
- Provide Method of Procedure (MOP) requirements/ templates, and required review period(s)

ASSUMPTIONS AND CLARIFICATIONS

- Vertiv will cover one month of storage costs as part of the consolidation service. If the original ship date is changed due to non-Vertiv delays, the customer is liable for any costs associated with the extended storage time.
- Vertiv start-up validates product warranty.
- Defects or damage resulting from installation not performed by Vertiv are not covered.
- Parts and Labor coverage is in accordance with Product Warranty. If a modified warranty is purchased, terms default to that specific package.
- Any customer site visit is limited to eight (8) hours per visit. Any time beyond forty (40) hours/wk or eight (8) hrs/day or additional Startup visits will be billed separately.
- Expenses incurred due to delays that are beyond the control of Vertiv may be billed at cost.
- Startup visit must be scheduled confirmation of proper installation (if Vertiv not involved with installation).
- This pricing excludes any load bank testing. This can also be quoted separately if required.
- Pricing excludes activities associated with 3rd party commissioning.
- Pricing excludes any type of circuit breaker NEMA testing. This can also be quoted separately if required.
- Customer/Installing contractor is responsible for providing elevated access as necessary.
- Any additional requests beyond the scope of this document will be billed separately by Vertiv.
- Vertiv will not perform physical changes to the site building (such as drilling holes, etc.)

TERMS AND CONDITIONS

Subject to all Terms & Conditions as noted in the Vertiv Terms & Conditions or the terms of a Master Agreement between the parties, if any, shall apply.

SCOPE OF WORK

SMART ROW 2 – FIRE SUPPRESSION

START-UP & OPTIONAL SERVICES

SERVICE SUMMARY

Feature	Detail
On-site Service	One site trip within the 48 contiguous states to start-up the system. Visit to be scheduled by the customer between 8am-5pm, Monday-Friday (excluding national holidays).
Service Professional	Performed by Vertiv factory-trained and authorized technician equipped with Vertiv Proprietary tools and software. Vertiv CEs and Vertiv Partners are the only approved OEM service providers for Vertiv products.
Permitting	Permits are the responsibility of the customer to see if one is required. Additional fees may apply and can vary based on the customer's location. (see Assumptions and Clarifications).
Optional services	Optional system integrity services can be requested by the customer as part of the startup and installation.

SERVICE PERFORMED

Fire Suppression Start-up:

1. Verify that 120V AC circuit has been ran to the fire suppression panel.
2. Verify all the items on the Fire Suppression readiness punch list have been completed and acknowledged.
3. Functionality test all input and output circuits for proper operation.
4. Complete the warranty inspection of the system.
5. Provide training to the customer on the operation of the Fire Suppression system.

Door Fan Test (if applicable):

1. Conduct a door fan test with the standardized Fan test system.
2. Measure the pressure retention rate and calculate the amount of air flowing through the Door fan.
3. Determine the total size of the air leaks (if any).
4. Provide the customer with the pressure test report.

Discharge Test (if applicable):

1. Replace the system cylinder with the Proinert test cylinder provided by the manufacturer.
2. Conduct a discharge test on the system.
3. Ensure that the oxygen level falls below 15% and maintains that level for a minimum of 10 minutes.
4. Place the system cylinder back into place and arm the system.
5. Provide the customer with a discharge test report.

CUSTOMER RESPONSIBILITIES

In order to provide timely, accurate and thorough execution of the services described herein, Vertiv requests the following:

- Point of Contact: Provide an authorized point of contact(s), specific for the scope of work, for scheduling and coordination purposes.
- Scheduling: Make dates available for scheduling service. All visits must be requested 10 business days in advance of need by contacting the Vertiv Customer Resolution Center at 1-800-543-2378.
- Site Access: Prior to time of scheduled work, provide site access including any customer required escort, security clearance, safety training and badging for Vertiv service personnel.
- Equipment Access: Convenient access to the equipment covered by the Scope of Work. Prior to scheduled time of work, notify Vertiv service personnel of any special requirements for equipment access including lifts, ladders, etc.
- Shutdown: Service may require shutdown of load to ensure electrical connection integrity.
- Notification: If for any reason the work cannot be performed during scheduled time, notify Vertiv service personnel 24-hours prior to scheduled event.

ASSUMPTIONS AND CLARIFICATIONS

- Assembly: The assembly of the Fire Suppression cabinet is included in the SmartRow2.
- Punch list: This document confirms system readiness and must be completed before startup. It is included in the submittal package.
- Permitting: The customer is responsible for any permits (if required), as it falls outside the original scope. While the process can be facilitated, the customer will be responsible for all permitting costs, including any optional services listed above.
- Maintenance: Per NFPA 2001, the FIKE Proinert IG-55 SHP Pro suppression system protecting the SmartRow2 shall be inspected on a semi-annual basis. These inspections are not only important in ensuring the included clean agent system is functionally operational but are necessary to qualify for any manufacturer warranties. Per the manufacturer's warranty guidelines, the equipment must be maintained on a semi-annual frequency by an authorized FIKE distributor commencing with the date of Startup.
- Optional Integrity testing: Manufacturer intends to provide both the integrity test services (Door fan test and Discharge test) at the customer's facility either directly or through a local Fike distributor. This pricing includes the necessary labor, equipment, and materials to complete this testing.
- Manufacturer does not guarantee a passing test after the system has been handed over to the customer and is not responsible for the patching and sealing of the enclosure if the cable and CRV penetrations have not been sealed.

TERMS AND CONDITIONS

Subject to all Terms & Conditions as noted in the Vertiv Terms & Conditions or the terms of a Master Agreement between the parties, if any, shall apply.



SmartRow 2

Scope of Work Checklist

Customer Name: _____

Project Name: _____

Project Number: _____

This document is to serve as a checklist to help identify and budget the various work activities involved with assembling and installing a SmartRow 2. It is the customers responsibility to ensure all tasks are assigned to partners which will result in a successful SmartRow 2 project.

Contact Vertiv for available local support resources to provide technical guidance as needed. Call 800 543-2378

The **X** indicates the responsible party for that task. Multiple **X**'s indicate shared responsibility.

This document is provided as a reference document and does not replace any product manuals or supporting documentation. Always read all product documentation before performing any work.

Customer (Name) *includes responsibility for Mechanical, Electrical, and/or General Contractors as needed :* _____

Project Management: _____

Assembly Team Lead: _____

Consolidator: _____

Vertiv Warranty Inspection Tech: _____

Vertiv Sales Rep (LVO): _____

	Customer	Local Vertiv Sales Rep	Project Management	Assembly Team	Consolidator / Inside Delivery	Flagship/FIKE Rep	Vertiv Warranty Inspection Tech	Tasks
1	Pre-Sale Activities							
1,01	X	X	☐	☐	☐	☐	☐	Perform / arrange Site Visit to qualify deployment. Add any incremental site-specific Tasks in Section 6 of this checklist.
1,02	X	X	☐	☐	☐	☐	☐	Assess whether the building has enough power available to support the SmartRow 2 and heat rejection.
1,03	X	X	☐	☐	☐	☐	☐	Advise if a floor loading analysis should be conducted.
1,04	☐	X	☐	☐	☐	☐	☐	Ensure the customer understands and adheres to the minimum and maximum SmartRow 2 heat load and rack density limits.
1,05	X	X	☐	☐	☐	☐	☐	Assess if a crane will be required to locate the heat rejection on a roof and plan accordingly.
1,06	X	X	☐	☐	☐	☐	☐	If a freight elevator will be used, confirm adequate lifting capacity and dimensional clearances (PMC cabinet is typically the heaviest piece of equipment at 1998mm height, 1400mm depth, 600mm width and up to 1,600 lb weight.)
2	Post Sale, Equipment Pre-Delivery Activities							
2,01	☐	X	☐	☐	☐	☐	☐	Ensure every task in this Trade SOW Guide is assigned to at least one responsible party (Marked by X). This guide is specific to the SmartRow 2.
2,02	☐	X	☐	☐	☐	☐	☐	Send a completed copy of this document to all involved parties.
2,03	☐	X	X	☐	☐	☐	☐	Ensure all trades receive a current and accurate manual and set of submittals.
2,04	☐	X	☐	☐	☐	☐	☐	Acknowledge all tasks listed in the Trade SOW Checklist are completed by all the responsible parties.
2,05	X	X	☐	☐	☐	☐	☐	Verify whether permits are necessary for the installation of the Fire Suppression System.
2,06	X	X	X	☐	☐	☐	☐	Asses whether the customer requires any onsite system integrity tests as part of the Fire suppression System Startup activity.
2,07	X	X	☐	☐	☐	☐	☐	Complete SmartRow 2 Delivery Service (Inside Delivery) checklist and return to factory within 10 days of PO receipt (Document MBFM 7160-10 in submittal packet).
2,08	X	X	☐	☐	☐	☐	☐	Ensure indoor space meets all SmartRow 2 requirements (see SmartRow 2 manual); identify any issues and resolve: ⁽¹⁾ Floor surface must be level and continuous (expansion joints sealed, raised floor tile gaps sealed, no floor drains, etc). ⁽²⁾ Mezzanine/roof can support outdoor heat rejection (if applicable) ⁽³⁾ Adequate service, egress and electrical clearances (see submittal packet) ⁽⁴⁾ Room containing SmartRow 2 maintained year-round within 0°C – 40°C. ⁽⁵⁾ The room and floor must be clean and free of debris. ⁽⁶⁾ Ensure there is at least 24 inches clearance above the rack top plates ⁽⁷⁾ Ensure no part of the SmartRow 2 will be closer than 18 inches to a sprinkler head (per NFPA 13)
2,09	X	X	☐	☐	☐	☐	☐	Make sure condenser is within 300 equivalent feet (see cooling equipment manuals for calculation guidance).Outdoor Condenser Installation. Follow Installer/User Guide. ⁽¹⁾ Condenser is bolted, mounted and leveled ⁽²⁾ Provide and install (2) low voltage twisted pair wires between each indoor cooling unit and outdoor heat rejection (condenser / drycooler) for CANbus communication and dry contact closure. ⁽³⁾ This includes qty (3) vacuum pulls of the refrigerant lines (oil must be changed in the vacuum pump between each pull, and readings should be 250 microns or less. Provide picture with date/time to confirm) ⁽⁴⁾ Refrigerant lines charged with freon ⁽⁵⁾ The outdoor piping are wrapped in aluminum and braced
2,10	X	X	☐	☐	☐	X	X	Confirm that the nearest drain for condensate is within the cooling unit's pump head limitations (see cooling equipment manuals).
2,11	X	X	☐	☐	☐	☐	☐	Provide and install utility over-current protection and circuit for each outdoor condenser/drycooler when applicable.
2,12	X	X	☐	☐	☐	☐	☐	Provide and install utility over-current protection and circuit for main input row connection in PMC.
2,13	X	X	X	☐	☐	☐	☐	Schedule delivery. If new construction, installation is recommended before office furniture is installed but after building construction is completed. Permanent, continuous power must be available.
2,14	☐	X	X	☐	☐	☐	☐	Schedule Vertiv Cooling System Warranty Inspection.
2,15	☐	X	X	☐	☐	☐	☐	Schedule Vertiv UPS System Warranty Inspection.

3	SmartRow 2 Assembly							
3,01	☐	☐	☐	☐	X	☐	☐	Receive shipment(s).
3,02	☐	☐	☐	☐	X	☐	☐	Bring equipment from truck into room, unpackage and remove debris (included with SmartRow 2 Delivery Service).
3,03	☐	☐	☐	☐	X	☐	☐	Review equipment for shipping damage (recommended the same party who receives the equipment).
3,04	☐	☐	☐	X	☐	☐	☐	Assemble, gasket and level PMC unit per submittal package.
3,05	☐	☐	☐	X	☐	☐	☐	Assemble, gasket and level indoor cooling unit(s) per submittal package.
3,06	☐	☐	☐	X	☐	☐	☐	Assemble, gasket and level racks per submittal package.
3,07	☐	☐	☐	X	☐	☐	☐	Assemble and attach rubber cable grommets.
3,08	☐	☐	☐	X	☐	☐	☐	Connect door switch wire and rack lighting wire harnesses.
3,09	☐	☐	☐	X	☐	☐	☐	Install cable troughs on top of equipment.
3,10	☐	☐	☐	X	☐	☐	☐	Neatly connect and route CANbus communication cables and address rack temperature 2T-sensors (set dip switches).
3,11	☐	☐	☐	X	☐	☐	☐	Neatly route the rack temperature 2T temperature probes into position in front of EIA rails.
3,12	☐	☐	☐	X	☐	☐	☐	Neatly route and connect all Ethernet cables between SmartRow 2 Network vNSA switch, and all UPS and cooling unit Unity monitoring cards, primary rack-PDU RPC2 monitoring cards, and cooling unit teamwork connections.
3,13	☐	☐	☐	X	☐	☐	☐	Neatly route and connect all rack-PDU array Ethernet cables.
4	SmartRow 2 Installation including the Fire Suppression System							
4,01	☐	☐	☐	X	☐	☐	☐	Install PMC to MBC (20KVA) or PMC to UPS (10KVA) interconnect cabling (cables provided with SmartRow 2)
4,02	☐	☐	☐	X	☐	☐	☐	Install UPS to MBC (20KVA) interconnect cabling (cables provided with SmartRow 2) or Mount POD (Included in SmartRow 2) on UPS (10KVA).
4,03	☐	☐	☐	☐	☐	☐	X	Connect low voltage wires to indoor cooling unit and outdoor heat rejection.
4,04	X	☐	☐	☐	☐	☐	☐	Provide and connect condensate drain line to each indoor cooling unit.
4,05	X	☐	☐	☐	☐	☐	☐	Connect utility high voltage building feed to main input in PMC.
4,06	X	☐	X	☐	☐	☐	☐	Ensure the handover document is completed and acknowledged by all responsible parties if startup activities are scheduled at different times.
5	SmartRow 2 Startup							
5,01	☐	☐	☐	X	☐	☐	☐	Ensure all rubber cable grommets are installed
5,02	☐	☐	☐	☐	☐	☐	X	Cooling system Warranty Inspection.
5,03	☐	☐	☐	☐	☐	☐	X	UPS system Warranty Inspection.
5,04	☐	☐	☐	☐	☐	☐	X	Configure RDU501 Controller
5,05	☐	☐	☐	X	☐	☐	☐	Close breakers on rack-PDUs.
5,06	☐	☐	☐	X	☐	☐	☐	Perform final SmartRow 2 functional test (Door switches, backup fans, HMI).
5,07	☐	☐	☐	X	☐	☐	☐	Clean entire SmartRow 2, inside and outside. When cleaning see-through Plexiglas doors follow instructions in manual to avoid scratching.
5,08	☐	☐	☐	X	☐	☐	☐	Ensure the SmartRow 2 Startup Form has been completed.
6	Fire Suppression System Start up							
6,01	X	X	☐	X	☐	X	☐	Ensure all the required parties are present on site for the installation of the Fire Suppression System.
6,02	☐	☐	☐	X	☐	☐	☐	Position, level and bolt together the Fire suppression cabinet to the rest of the row.
6,03	☐	☐	☐	X	☐	☐	☐	Ensure all the wiring is connected, according to the information available in the submittals.
6,04	☐	☐	☐	X	☐	☐	☐	Install the piping in all the other cabinets.
6,05	X	X	☐	☐	☐	X	☐	Ensure the Punch list items are completed and signed by the responsible parties.
6,06	X	X	☐	☐	☐	X	☐	Review the closeout document with the information about the pre-test conducted at Flagship.
6,07	☐	☐	☐	☐	☐	X	☐	Validate the warranty of the Fire supression system.
6,08	☐	☐	☐	☐	☐	X	☐	Verify that all components are functioning as intended.
6,09	X	☐	☐	☐	☐	X	☐	Provide training to the customer on the system.
7	Optional - Fire Suppression System Integrity Test (upon customer request)							
7,01	☐	☐	☐	☐	☐	X	☐	Conduct a door fan test with the standardized Fan test system.
7,02	☐	☐	☐	☐	☐	X	☐	Measure the pressure retention rate and calculate the amount of air flowing through the Door fan.
7,03	☐	☐	☐	☐	☐	X	☐	Determine the total size of the air leaks.
7,04	☐	☐	☐	☐	☐	X	☐	Provide the customer with the pressure test report.
7,05	☐	☐	☐	☐	☐	X	☐	Replace the system cylinder with the Proinert test cylinder provided by the manufacturer.
7,06	☐	☐	☐	☐	☐	X	☐	Conduct a discharge test on the system.
7,07	☐	☐	☐	☐	☐	X	☐	Ensure that the oxygen level falls below 15% and maintains that level for a minimum of 10 minutes.
7,08	☐	☐	☐	☐	☐	X	☐	Place the system cylinder back into place and arm the system.
7,09	☐	☐	☐	☐	☐	X	☐	Provide the customer with a discharge test report.