



Solution: SR2N03030FAB1

1. Change Log..... 3

2. Site Planning Datasheet..... 4

3. Interconnection Guide (ICG)..... 5

4. Field Supplied Cable & Part List 21

5. Vertiv MSR2 600mm IT Rack 22

6. Power Management Cabinet - 40kW (PMC40) 23

7. CRD30 24

8. Plenum CRD30 25

9. IMPB4BAR 26

10. JOINTPACK 27

11. END CAP 28

12. ROOFBRACKETS 29

13. V2 TPN 2x50A 30

14. IMPB CEB 250A TPN 31

15. IMPB CEB 250A TPN 32

16. SCOPE OF WORK 33

1. Change Log

Rev	Date	Author	Description	Number of Change
A	04/24/2026	TK	Initial Release	CO-1127543

2. Site Planning Datasheet

Smart Row 2 Site Planning Datasheet (208V, 3 phase + PE)

Configuration Number	Part Number	Max Row Capacity (kW)	IT Racks per Row	Capacity per Rack (kW)	Cooling Units per Row	Rack PDU Count	Main Input Breaker Size	Condenser Breaker Size	Condenser Dry Weight kg (lbs)	Row Dimensions (L x H x D) mm (in)	Row Weight kg (lbs)	Min. Staging Area m2 (ft2)
31	SR2N03030NAB1	30	3	10	1	3	200 A	70 A	193 (424.6)	2700 (106.3) x 2433 (95.8) x 1400 (55.1)	1858 (4095)	22.34 (240.47)
32	SR2N03030PAB1	30	3	10	1	6	200 A	70 A	193 (424.6)	2700 (106.3) x 2433 (95.8) x 1400 (55.1)	1959 (4318)	23.40 (251.88)
33	SR2N03030FAB1	30	3	10	2	6	200 A	70 A	193 (424.6)	3000 (118.1) x 2433 (95.8) x 1400 (55.1)	2385 (5258)	27.05 (291.16)
34	SR2N04030NAB1	30	4	7.5	1	4	200 A	70 A	193 (424.6)	3300 (129.9) x 2433 (95.8) x 1400 (55.1)	2069 (4562)	24.38 (262.42)
35	SR2N04030PAB1	30	4	7.5	1	8	200 A	70 A	193 (424.6)	3300 (129.9) x 2433 (95.8) x 1400 (55.1)	2178 (4802)	25.53 (274.80)
36	SR2N04030FAB1	30	4	7.5	2	8	200 A	70 A	193 (424.6)	3600 (141.7) x 2433 (95.8) x 1400 (55.1)	2604 (5742)	29.18 (314.09)
37	SR2N05030NAB1	30	5	6	1	5	200 A	70 A	193 (424.6)	3900 (153.5) x 2433 (95.8) x 1400 (55.1)	2281 (5028)	26.42 (284.38)
38	SR2N05030PAB1	30	5	6	1	10	200 A	70 A	193 (424.6)	3900 (153.5) x 2433 (95.8) x 1400 (55.1)	2397 (5284)	27.66 (297.73)
39	SR2N05030FAB1	30	5	6	2	10	200 A	70 A	193 (424.6)	4200 (165.4) x 2433 (95.8) x 1400 (55.1)	2823 (6224)	31.31 (337.02)
40	SR2N04040NAB1	40	4	10	2	4	200 A	70 A	193 (424.6)	3600 (141.7) x 2433 (95.8) x 1400 (55.1)	2484 (5476)	27.83 (299.56)
41	SR2N04040PAB1	40	4	10	2	8	200 A	70 A	193 (424.6)	3600 (141.7) x 2433 (95.8) x 1400 (55.1)	2581 (5690)	28.78 (309.79)
42	SR2N04040FAB1	40	4	10	3	8	200 A	70 A	193 (424.6)	3900 (153.5) x 2433 (95.8) x 1400 (55.1)	2007 (6630)	32.43 (349.07)
43	SR2N05040NAB1	40	5	8	2	5	200 A	70 A	193 (424.6)	4200 (165.4) x 2433 (95.8) x 1400 (55.1)	2709 (5973)	30.07 (323.67)
44	SR2N05040PAB1	40	5	8	2	10	200 A	70 A	193 (424.6)	4200 (165.4) x 2433 (95.8) x 1400 (55.1)	2828 (6234)	31.31 (337.02)
45	SR2N05040FAB1	40	5	8	3	10	200 A	70 A	193 (424.6)	4500 (177.2) x 2433 (95.8) x 1400 (55.1)	3254 (7174)	34.96 (376.31)
46	SR2N06040NAB1	40	6	6.8	2	6	200 A	70 A	193 (424.6)	4800 (189.0) x 2433 (95.8) x 1400 (55.1)	2951 (6505)	32.57 (350.58)
47	SR2N06040PAB1	40	6	6.8	2	12	200 A	70 A	193 (424.6)	4800 (189.0) x 2433 (95.8) x 1400 (55.1)	3096 (6827)	34.28 (368.99)
48	SR2N06040FAB1	40	6	6.8	3	12	200 A	70 A	193 (424.6)	5100 (200.8) x 2433 (95.8) x 1400 (55.1)	3523 (7767)	37.93 (408.28)
49	SR2N07040NAB1	40	7	5.7	2	7	200 A	70 A	193 (424.6)	5400 (212.6) x 2433 (95.8) x 1400 (55.1)	3169 (6986)	34.71 (373.62)
50	SR2N07040PAB1	40	7	5.7	2	14	200 A	70 A	193 (424.6)	5400 (212.6) x 2433 (95.8) x 1400 (55.1)	3329 (7339)	36.61 (394.07)
51	SR2N07040FAB1	40	7	5.7	3	14	200 A	70 A	193 (424.6)	5700 (224.4) x 2433 (95.8) x 1400 (55.1)	3755 (8279)	40.26 (433.36)
52	SR2N08040NAB1	40	8	5	2	8	200 A	70 A	193 (424.6)	6000 (236.2) x 2433 (95.8) x 1400 (55.1)	3380 (7452)	36.75 (395.57)
53	SR2N08040PAB1	40	8	5	2	16	200 A	70 A	193 (424.6)	6000 (236.2) x 2433 (95.8) x 1400 (55.1)	3547 (7821)	38.74 (416.99)
54	SR2N08040FAB1	40	8	5	3	16	200 A	70 A	193 (424.6)	6300 (248.0) x 2433 (95.8) x 1400 (55.1)	3974 (8761)	42.39 (456.28)


Notes:

1. System Environmental Conditions: Indoors, 41°F to 104°F (5°C to 40°C), RH to 80% with Max dew point of 82.4°F (28°C) Meets the requirements of data center or computer room environments.
2. Floor surface must be level and continuous (expansion joints sealed, raised floor tile gaps sealed) Ground bearing capacity is more than 1000 kg/m2
3. No building springler head should be within 19.7 in (0.5 m)
4. Install in accordance with national and local electrical codes
5. Cable Sizing (Main Input Breaker Size) 3/0 AWG
6. Row Dimensions do not include necessary space needed for access including per ADA or local codes


SHEET NO.	DRAWN BY:		DWG. NO.		 VERTIV™	
CO. NO.	DESIGNED BY:	DATE (LATEST REV.)				
REF. DWG.	APPROVED BY:	REVISION	952 N. CLEVELAND AVE WESTERVILLE, OHIO 43081			
TITLE						
Smart Row 2 Site Planning Datasheet (208V, 3 phase + PE)						

3. Interconnection Guide (ICG)


	0	1	2	3	4	5	6	7	8	9							
A	Vertiv Row Solution Knowledge to Build Optimized Infrastructure Solutions 																
B																	
C	Vertiv™ SmartRow™ 2: 3x IT Rack 30kW  Row IT Load Capacity: 30 kW Power Redundancy UPS: Yes Power Redundancy rPDU: Yes Cooling Redundancy: Yes Dimensions: Length: 9.84 ft [3000 mm] Depth: 4.6 ft [1400 mm] Height: 7.98 ft [2433 mm]																
D																	
E																	
1 / 16		DRAWN BY: Nilesch Patil		DWG NO. SR2N03030FAB1													
CHANGE NO.		APPROVED BY: Petr Harant		DATE (LATEST REV.)		01.09.2026											
PAGE DESCRIPTION:		1- Title page / cover sheet		TITLE / DESCRIPTION:		Vertiv™ SmartRow™ 2: 3x IT Rack 30kW											
				© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, RENT, LEASE, LOAN, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.													
				 VERTIV™													
				REVISION:		505 N. CLEVELAND AVE WESTERVILLE OH 43081											

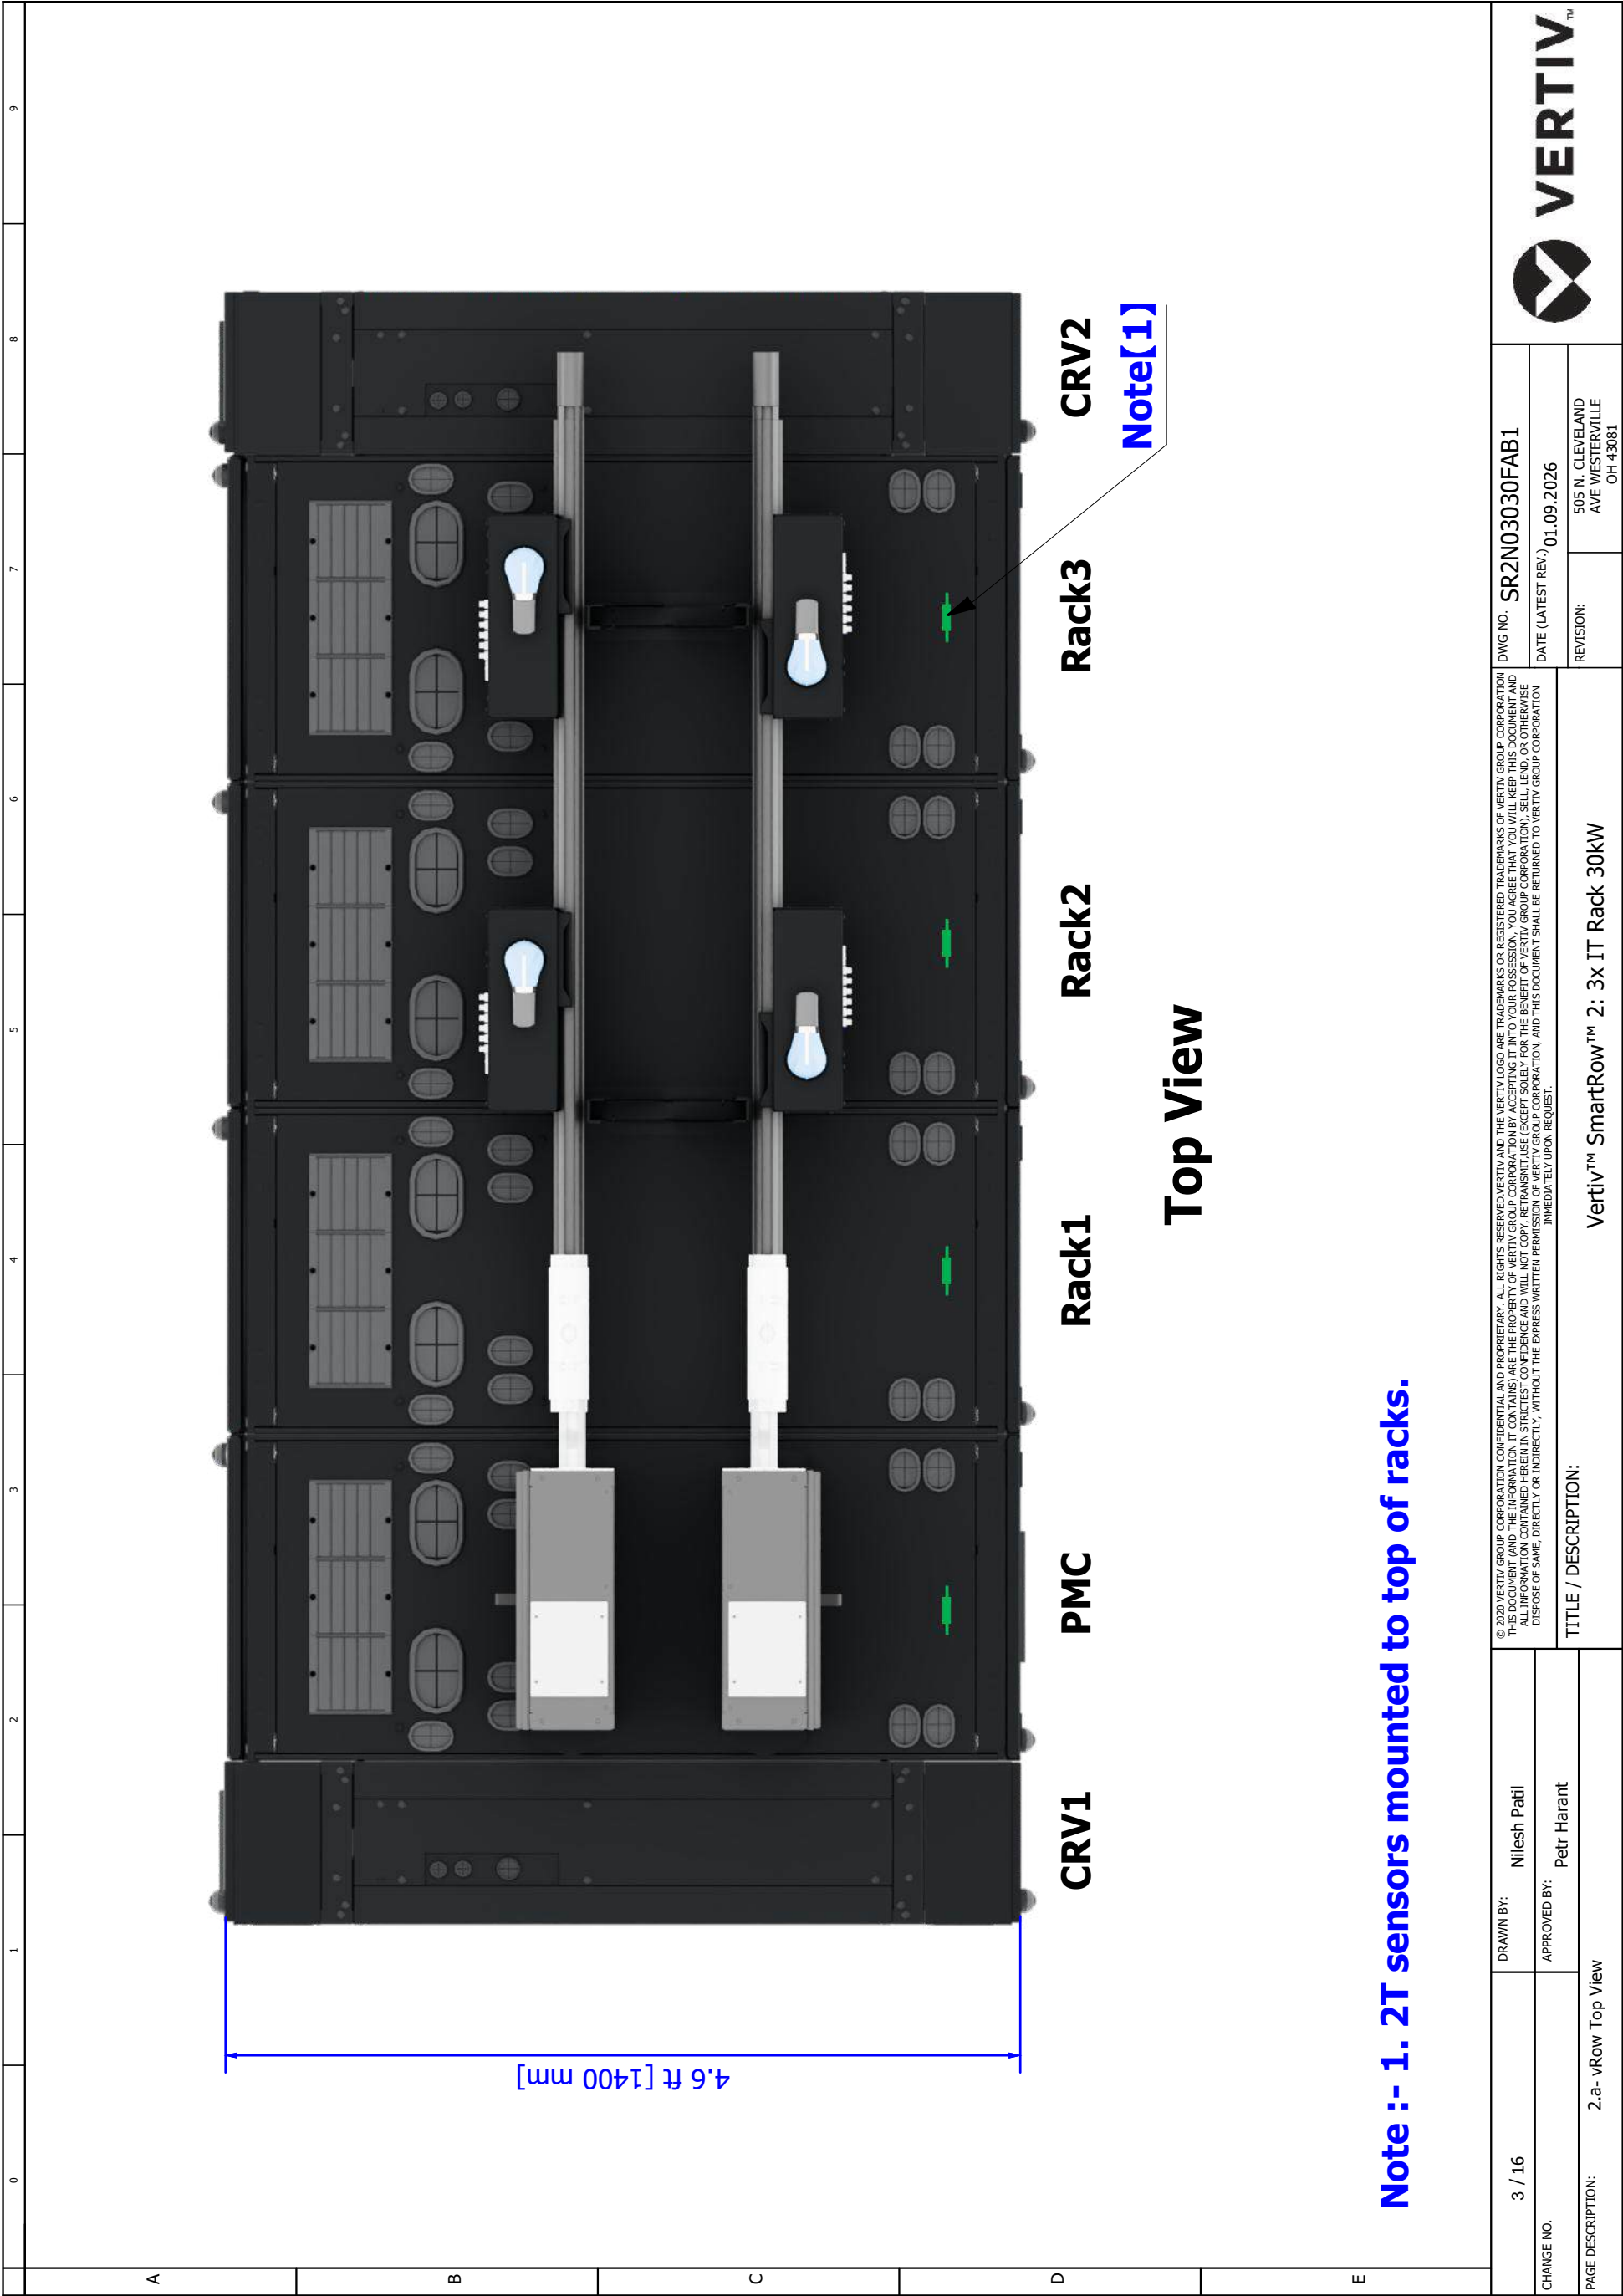

CRV Connection Details

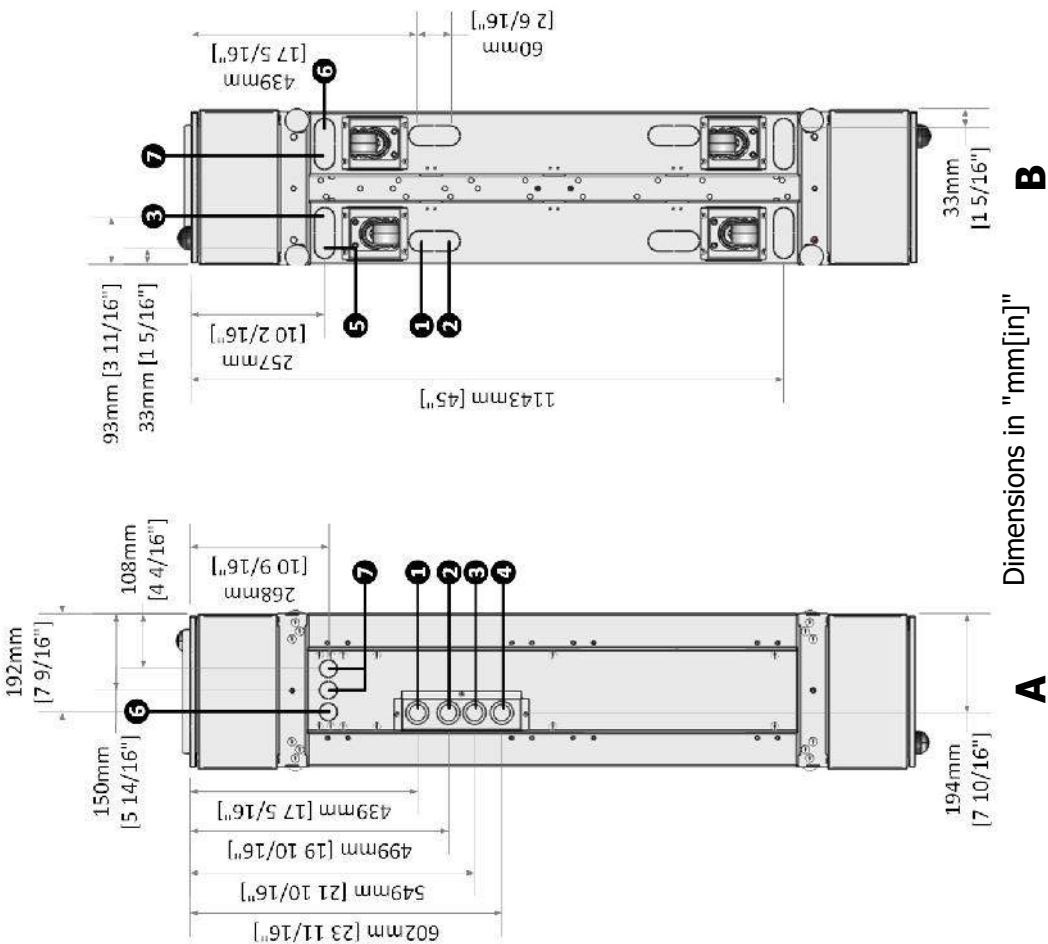

PMC/IT Cabinet Connection Details

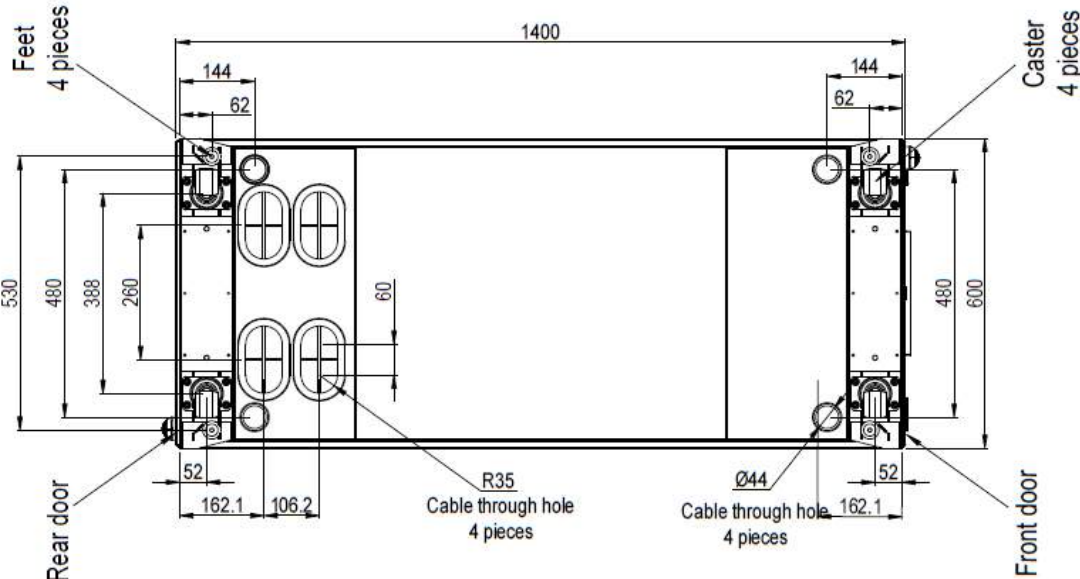

Item	Description	
A	Top Plate	
B	Bottom Plate	
1	RLT	Refrigerant liquid line inlet
2	RGT	Refrigerant gas line outlet
3	HS	Humidifier Supply
4	CPT	Condensate pump outlet
5	CGT	Condensate gravity outlet
6	HVT	High voltage cable access
7	LVT	Low voltage cable access
		5/8 in. O.D. copper sweat
		7/8 in. O.D. copper sweat
		Rc 1/2 in. female copper, threaded joint
		G 3/4 x Rc 1/2 in.
		Rc 1/2 in. female copper, threaded joint
		Combination knockout:28 mm (1-1/8 in.)
		Combination knockout:28 mm (1-1/8 in.)

Note :- Pipe sizes are for connection purposes and not the required line size. Consult thermal manuals for line sizes.

PAGE DESCRIPTION: 2.b- vRow Bottom View		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 3x IT Rack 30kW		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081		 VERTIV™
APPROVED BY: Petr Harant		DATE (LATEST REV.) 01.09.2026				
DRAWN BY: Nilesh Patil		DWG NO. SR2N03030FAB1				

CHANGE NO. 4 / 16		© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU WILL KEEP THIS DOCUMENT AND THE INFORMATION IT CONTAINS IN STRICTLY CONFIDENTIAL AND PROPRIETARY. YOU WILL NOT REPRODUCE, COPY, DISTRIBUTE, DISCLOSE, OR OTHERWISE MAKE AVAILABLE TO ANY OTHER PERSON THE CONTENTS OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.			
--------------------------	--	---	--	--	--




Cable overview

[illegible]

Cable overview

Cable overview																																															
<table><tr><th>Packaging No.</th><th>Cable Category</th><th>Cable No.</th><th>Tag1</th><th>Tag2</th><th>Length (inch/mm)</th><th>Description</th></tr><tr><td rowspan="5">0411C211</td><td>MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)</td><td>W301</td><td>RACK_R-SW;RACK:RLIGHT</td><td>RACK_R-SW;RACK:RLIGHT</td><td>26/660</td><td>The cable is preinstalled on the rear door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack1</td></tr><tr><td>MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)</td><td>W300</td><td>RACK_F-SW;RACK_FLIGHT</td><td>RACK_F-SW;RACK_FLIGHT</td><td>26/660</td><td>The cable is preinstalled on the front door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack2</td></tr><tr><td>MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)</td><td>W301</td><td>RACK_R-SW;RACK:RLIGHT</td><td>RACK_R-SW;RACK:RLIGHT</td><td>26/660</td><td>The cable is preinstalled on the rear door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack2</td></tr><tr><td>MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)</td><td>W300</td><td>RACK_F-SW;RACK_FLIGHT</td><td>RACK_F-SW;RACK_FLIGHT</td><td>26/660</td><td>The cable is preinstalled on the front door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack3</td></tr><tr><td>MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)</td><td>W301</td><td>RACK_R-SW;RACK:RLIGHT</td><td>RACK_R-SW;RACK:RLIGHT</td><td>26/660</td><td>The cable is preinstalled on the rear door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack3</td></tr></table>										Packaging No.	Cable Category	Cable No.	Tag1	Tag2	Length (inch/mm)	Description	0411C211	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W301	RACK_R-SW;RACK:RLIGHT	RACK_R-SW;RACK:RLIGHT	26/660	The cable is preinstalled on the rear door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack1	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W300	RACK_F-SW;RACK_FLIGHT	RACK_F-SW;RACK_FLIGHT	26/660	The cable is preinstalled on the front door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack2	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W301	RACK_R-SW;RACK:RLIGHT	RACK_R-SW;RACK:RLIGHT	26/660	The cable is preinstalled on the rear door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack2	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W300	RACK_F-SW;RACK_FLIGHT	RACK_F-SW;RACK_FLIGHT	26/660	The cable is preinstalled on the front door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack3	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W301	RACK_R-SW;RACK:RLIGHT	RACK_R-SW;RACK:RLIGHT	26/660	The cable is preinstalled on the rear door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack3
Packaging No.	Cable Category	Cable No.	Tag1	Tag2	Length (inch/mm)	Description																																									
0411C211	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W301	RACK_R-SW;RACK:RLIGHT	RACK_R-SW;RACK:RLIGHT	26/660	The cable is preinstalled on the rear door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack1																																									
	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W300	RACK_F-SW;RACK_FLIGHT	RACK_F-SW;RACK_FLIGHT	26/660	The cable is preinstalled on the front door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack2																																									
	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W301	RACK_R-SW;RACK:RLIGHT	RACK_R-SW;RACK:RLIGHT	26/660	The cable is preinstalled on the rear door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack2																																									
	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W300	RACK_F-SW;RACK_FLIGHT	RACK_F-SW;RACK_FLIGHT	26/660	The cable is preinstalled on the front door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack3																																									
	MSR2-NR6P cabinets are preinstalled with cable (Factory assembled)	W301	RACK_R-SW;RACK:RLIGHT	RACK_R-SW;RACK:RLIGHT	26/660	The cable is preinstalled on the rear door of MSR2-NR6P cabinet -LED light and microswitch cascade cable for Rack3																																									
<table><tr><td colspan="2">DRAWN BY: Nilesch Patil</td><td colspan="2">DWG NO. SR2N03030FAB1</td><td colspan="2">VERTIV™</td></tr><tr><td colspan="2">APPROVED BY: Petr Harant</td><td colspan="2">DATE (LATEST REV.) 01.09.2026</td><td colspan="2">REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081</td></tr><tr><td colspan="2">PAGE DESCRIPTION: 3.c- Cable overview : =vRow+RACK1-W301 - =vRow+RACK3-W301</td><td colspan="2">TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 3x IT Rack 30kW</td><td colspan="2"></td></tr></table>										DRAWN BY: Nilesch Patil		DWG NO. SR2N03030FAB1		VERTIV™		APPROVED BY: Petr Harant		DATE (LATEST REV.) 01.09.2026		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081		PAGE DESCRIPTION: 3.c- Cable overview : =vRow+RACK1-W301 - =vRow+RACK3-W301		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 3x IT Rack 30kW																							
DRAWN BY: Nilesch Patil		DWG NO. SR2N03030FAB1		VERTIV™																																											
APPROVED BY: Petr Harant		DATE (LATEST REV.) 01.09.2026		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081																																											
PAGE DESCRIPTION: 3.c- Cable overview : =vRow+RACK1-W301 - =vRow+RACK3-W301		TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 3x IT Rack 30kW																																													

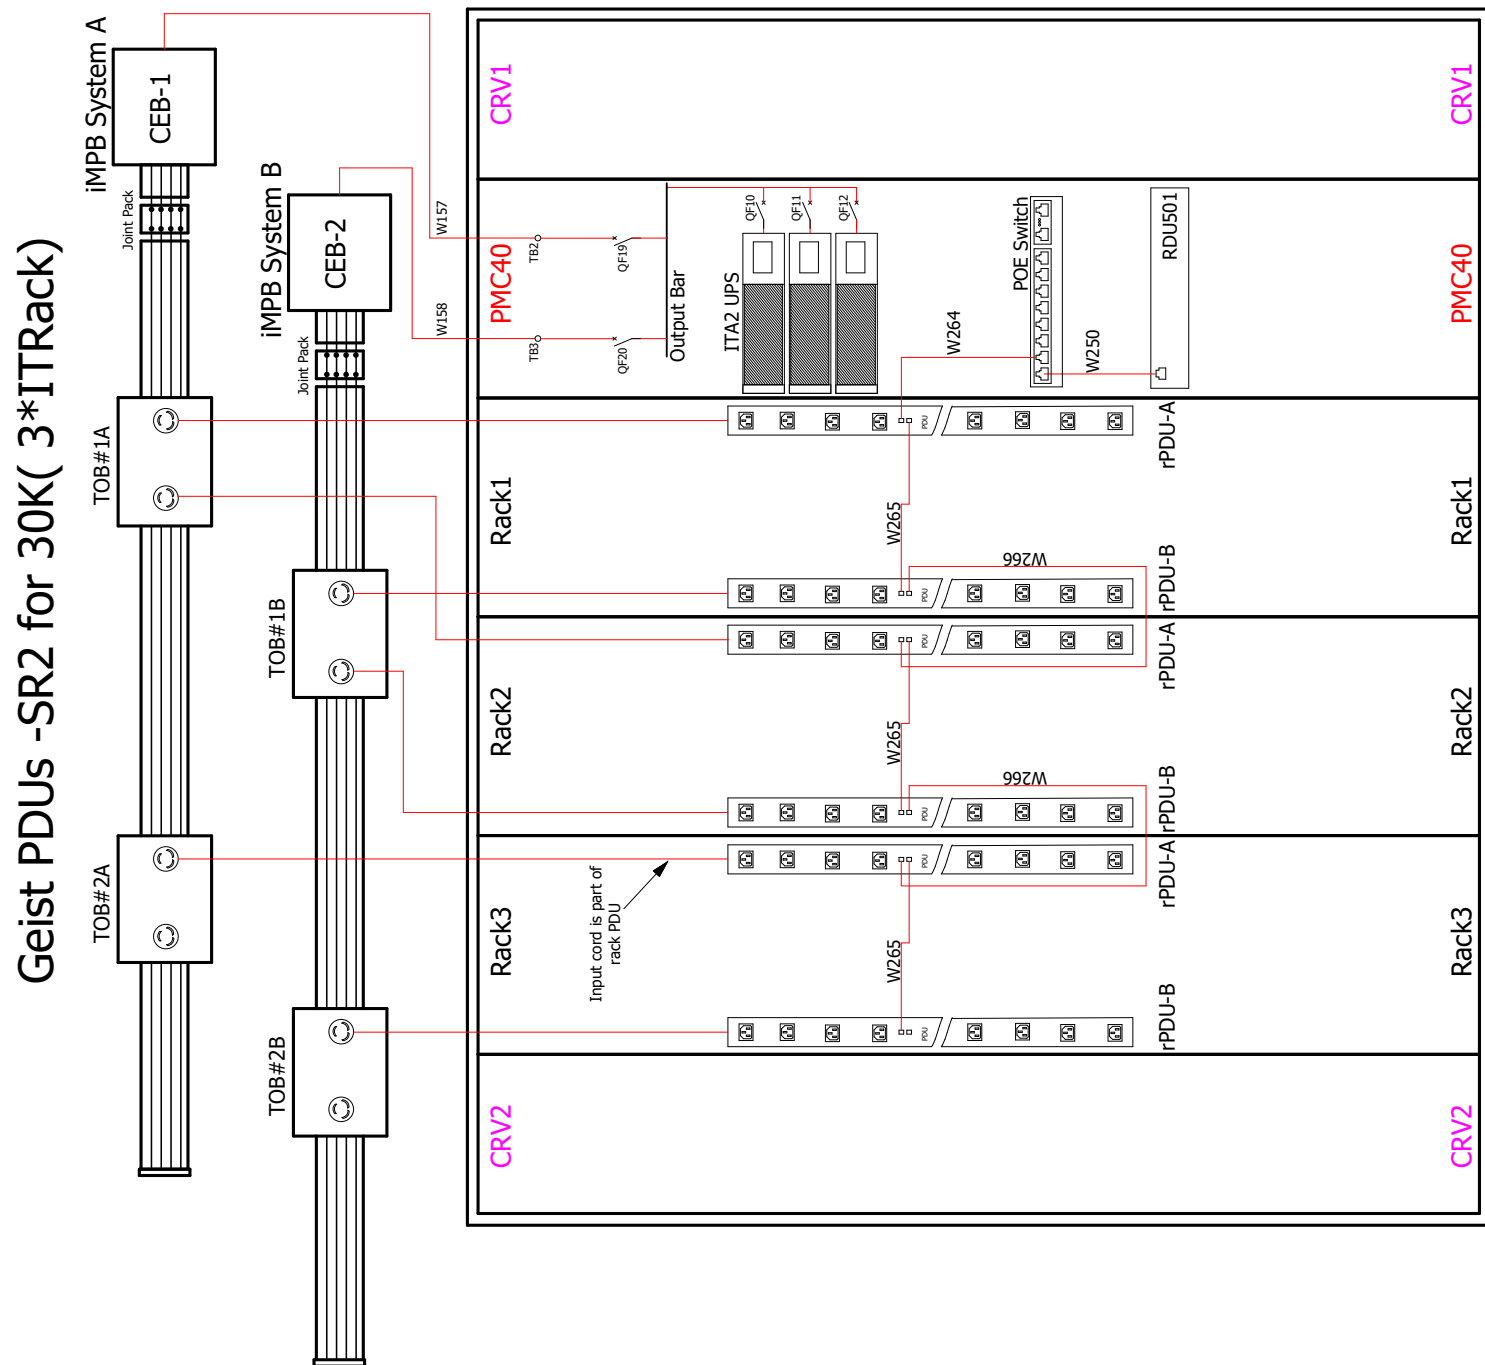

	9 / 16	DRAWN BY: Nilesh Patil	© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV™ AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, DISSEMINATE, OR OTHERWISE USE THE INFORMATION FOR ANY PURPOSE OTHER THAN THAT AUTHORIZED BY VERTIV GROUP CORPORATION. IF YOU NO LONGER REQUIRE THIS DOCUMENT, PLEASE RETURN IT TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.	DWG NO. SR2N03030FAB1	 VERTIV™
CHANGE NO.		APPROVED BY: Petr Harant		DATE (LATEST REV.) 01.09.2026	
PAGE DESCRIPTION:	4.- PDU wiring diagram	TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 3x IT Rack 30kW		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081	


0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---



— — — — —	Factory connected cables
—————	Cables connected at assembly
— — — — —	300157G2 (10 ft)
—————	300157G1 (6 ft)

CHANGE NO.	10/16	DRAWN BY: Nilesh Patil	APPROVED BY: Petr Harant	TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 3x IT Rack 30kW	DWG NO. SR2N03030FAB1	DATE (LATEST REV.) 01.09.2026	REVISION:	505 N. CLEVELAND AVE WESTERVILLE OH 43081	 VERTIV™
PAGE DESCRIPTION: 4.a- Air conditioner wiring diagram				© 2020 VERTIV GROUP. CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP. CORPORATION AND THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND INFORMATION CONFIDENTIAL AND PROPRIETARY AND WILL NOT REPRODUCE, COPIY, DISTRIBUTE, DISCLOSE, OR OTHERWISE MAKE AVAILABLE TO ANY OTHER PERSON OR ENTITY WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.					

POE Locks -SR2 for 30K (3*ITRack)

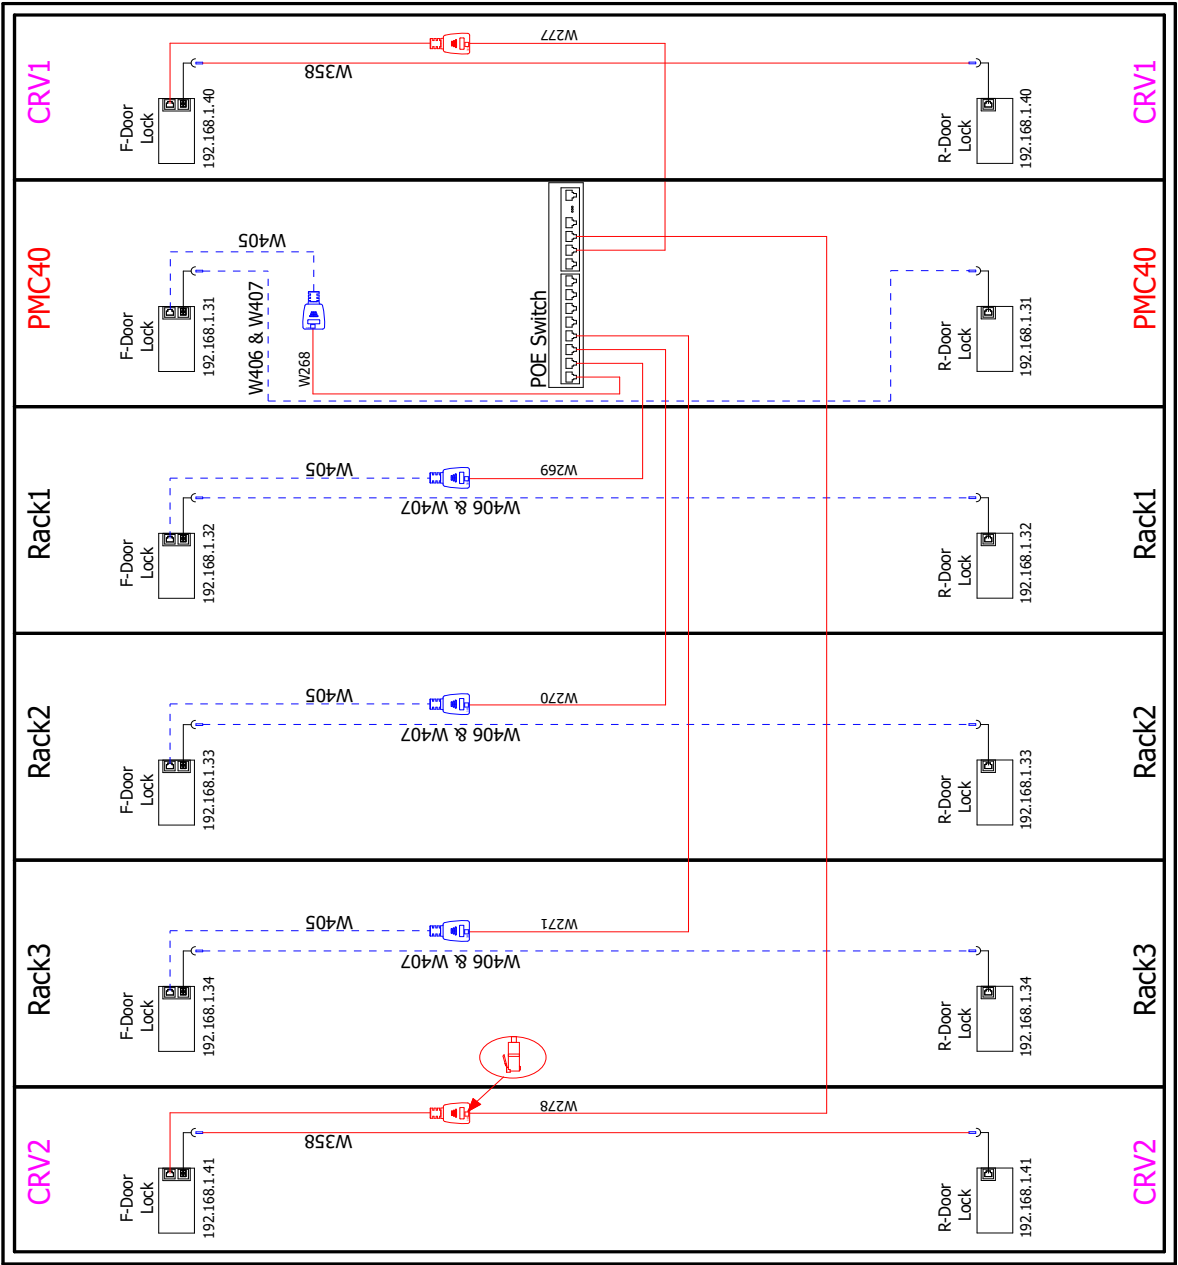


Rear View

- Factory connected cables
- Cables connected at assembly

CHANGE NO.		11/16	DRAWN BY:	Nilesh Patil	DWG NO.		SR2N03030FAB1		 VERTIV™				
APPROVED BY:			Petr Harant		DATE (LATEST REV.)		01.09.2026						
PAGE DESCRIPTION:		4.b- Intelligent lock wiring diagram			Vertiv™ SmartRow™ 2: 3x IT Rack 30kW								
© 2020 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND THE INFORMATION IT CONTAINS IN STRICTLY CONFIDENTIAL AND PROPRIETARY. YOU WILL NOT REPRODUCE, COPIY, OR TRANSMIT THIS DOCUMENT OR THE INFORMATION IT CONTAINS IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.													
TITLE / DESCRIPTION:										REVISION:		505 N. CLEVELAND AVE WESTERVILLE OH 43081	

LED & Micro Switch -SR2 for 30K (3*ITRack)

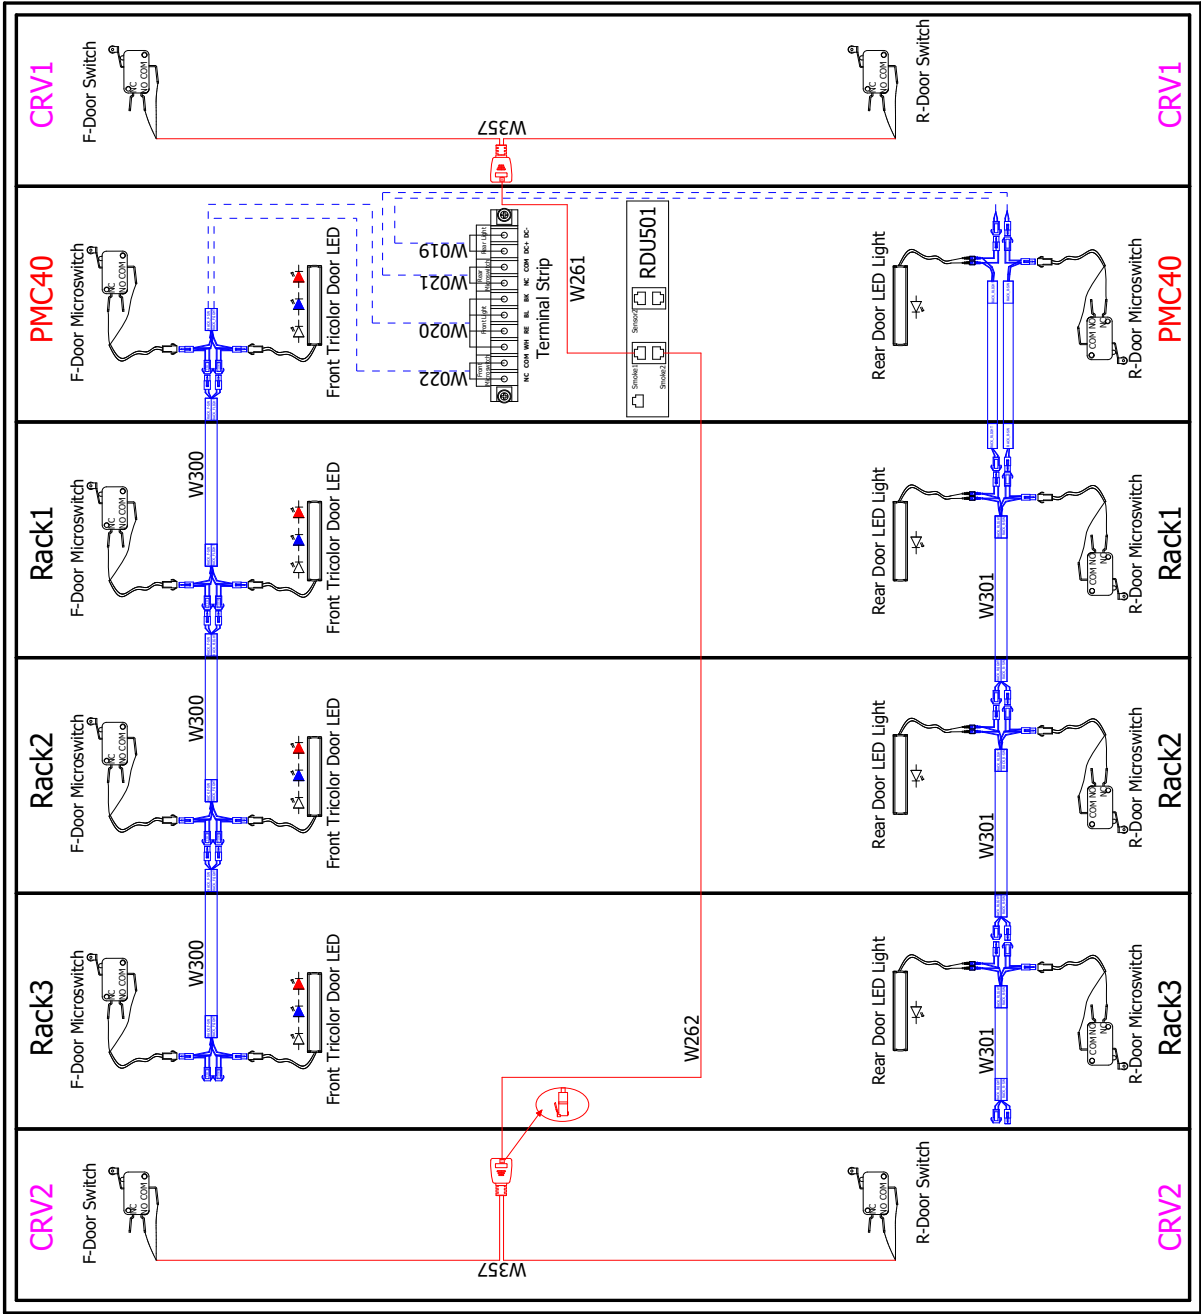


Rear View

----- Factory connected cables
----- Cables connected at assembly

CHANGE NO.		12/16	DRAWN BY:	Nilesh Patil			DWG NO.		SR2N03030FAB1	
APPROVED BY:			Petr Harant	DATE (LATEST REV.)			01.09.2026			
PAGE DESCRIPTION:					4.c- LED&Micro Switch wiring diagram			REVISION:		505 N. CLEVELAND AVE WESTERVILLE OH 43081
TITLE / DESCRIPTION:					Vertiv™ SmartRow™ 2: 3x IT Rack 30kW					
© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION AND THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND IT WILL REMAIN THE PROPERTY OF VERTIV GROUP CORPORATION. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.										
VERTIV™										

© 2024 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF VERTIV GROUP CORPORATION. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.

Fans & THDs -SR2 for 30K (3*ITRack)

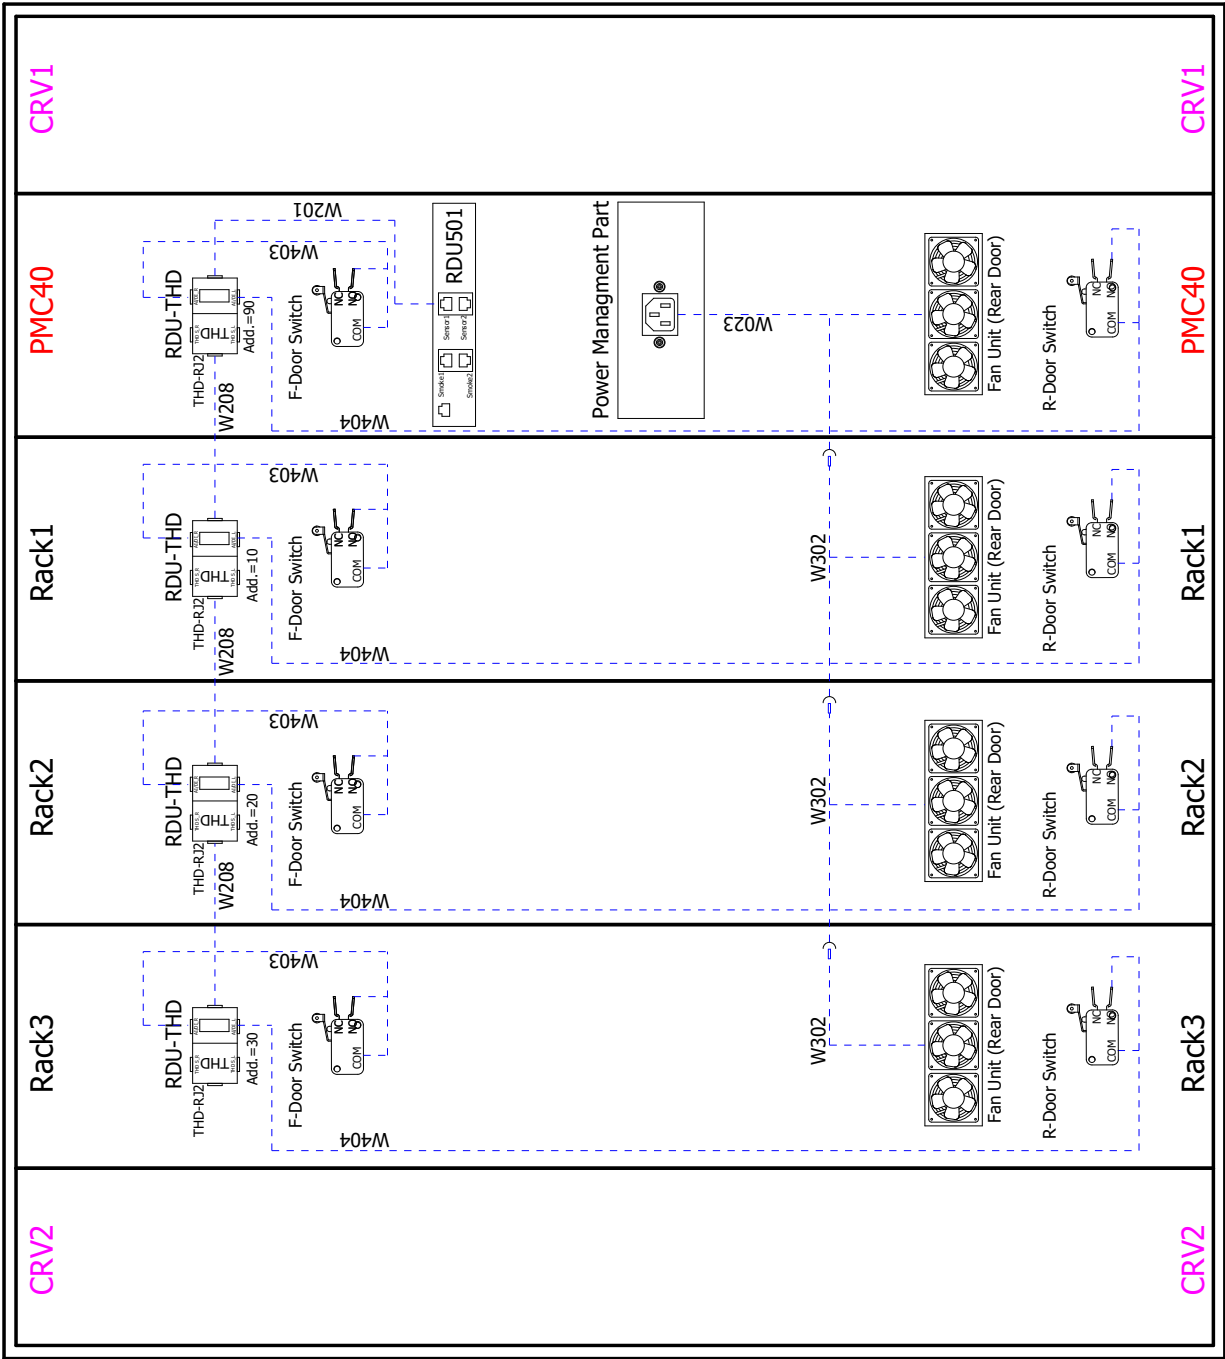


Rear View


--- Factory connected cables
— Cables connected at assembly

CHANGE NO.		5 / 16	DRAWN BY: Nilesh Patil	DVG NO. SR2N03030FAB1		 VERTIV TM
APPROVED BY: Petr Harant		DATE (LATEST REV.) 01.09.2026				
PAGE DESCRIPTION: 4.d- THD& Emergency Fan wiring diagram		REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081				
TITLE / DESCRIPTION: Vertiv TM SmartRow TM 2: 3x IT Rack 30kW						

© 2024 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. ALL INFORMATION CONTAINED HEREIN IS STRICTLY CONFIDENTIAL AND WILL NOT BE DISCLOSED TO ANY OTHER PARTY WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT IS THE PROPERTY OF VERTIV GROUP CORPORATION AND WILL NOT BE LOANED, REPRODUCED, COPIED, OR OTHERWISE DISPOSED OF IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.

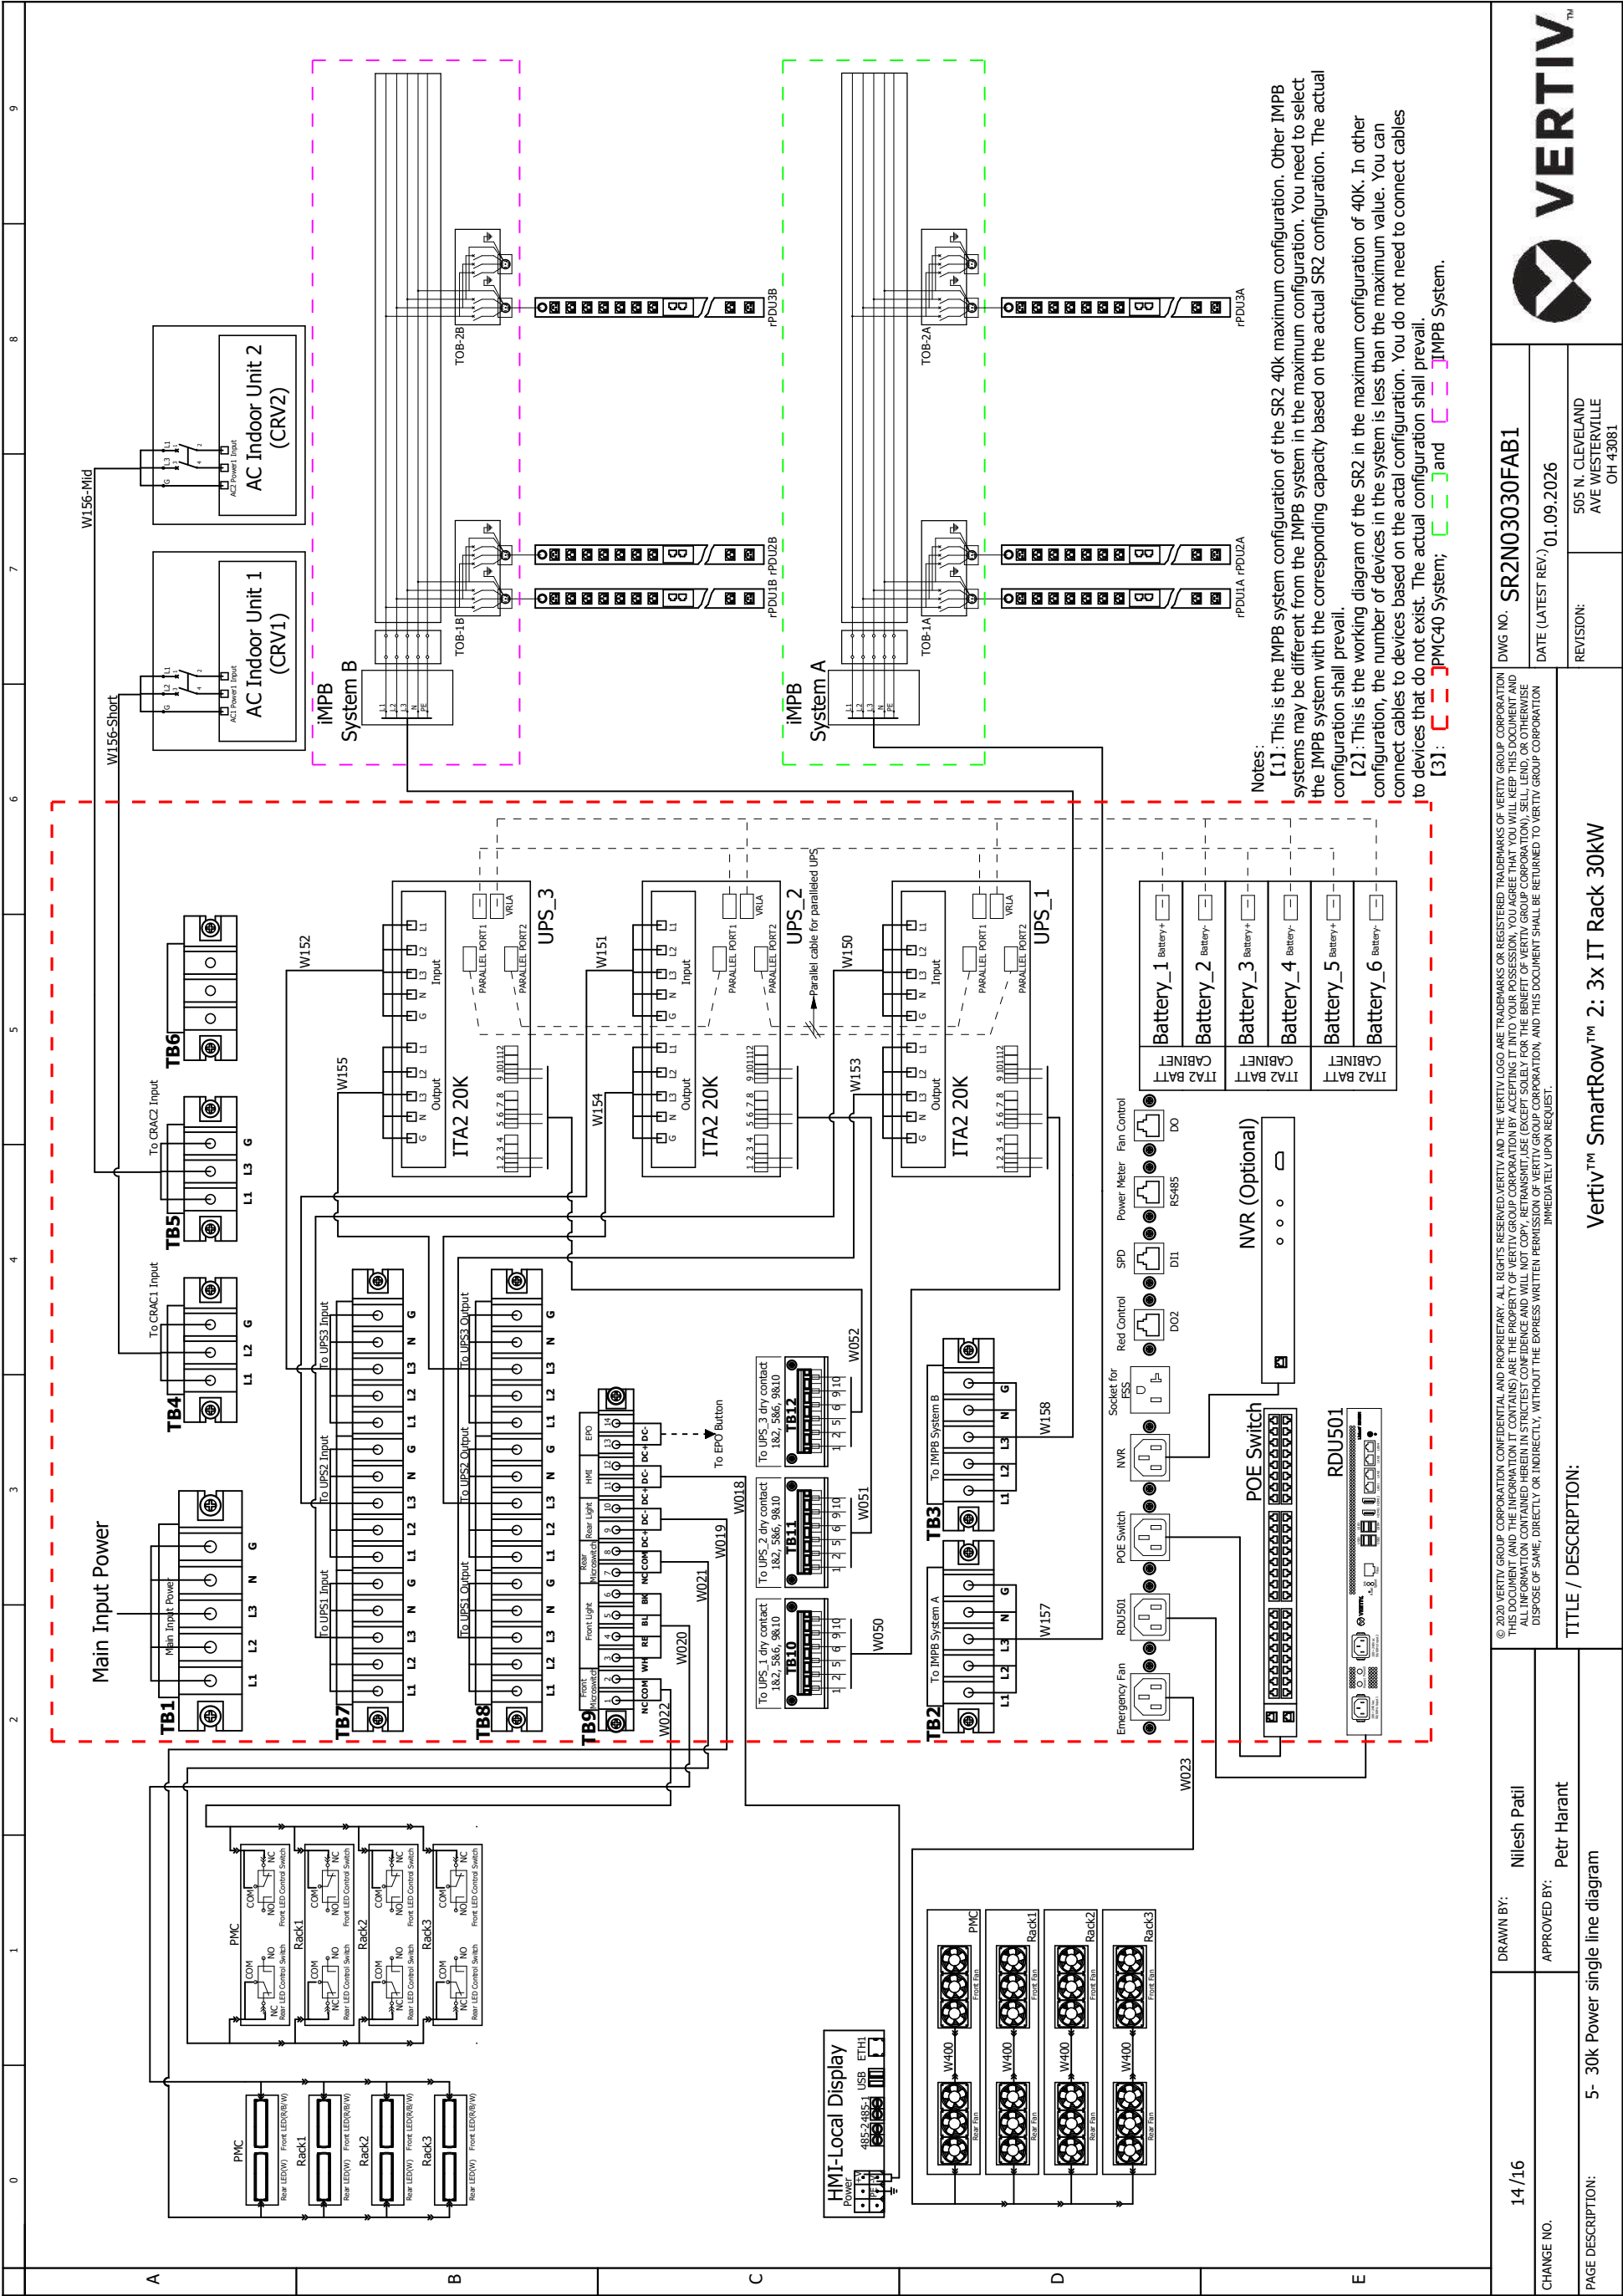

CHANGE NO.		DRAWN BY: Nitesh Patil		 VERTIV™
APPROVED BY: Petr Harant				
PAGE DESCRIPTION: 5- 30k Power single line diagram				
TITLE / DESCRIPTION: Vertiv™ SmartRow™ 2: 3x IT Rack 30kW				
IMMEDIATELY UPON REQUEST.				
DATE (LATEST REV.): 01.09.2026				
REVISION:				505 N. CLEVELAND AVE WESTERVILLE OH 43081
DWG NO. SR2N03030FAB1				
© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND NOT REPRODUCE, RESELL, RENT, LOAN, OR OTHERWISE DISSEMINATE IT TO ANY OTHER PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION				

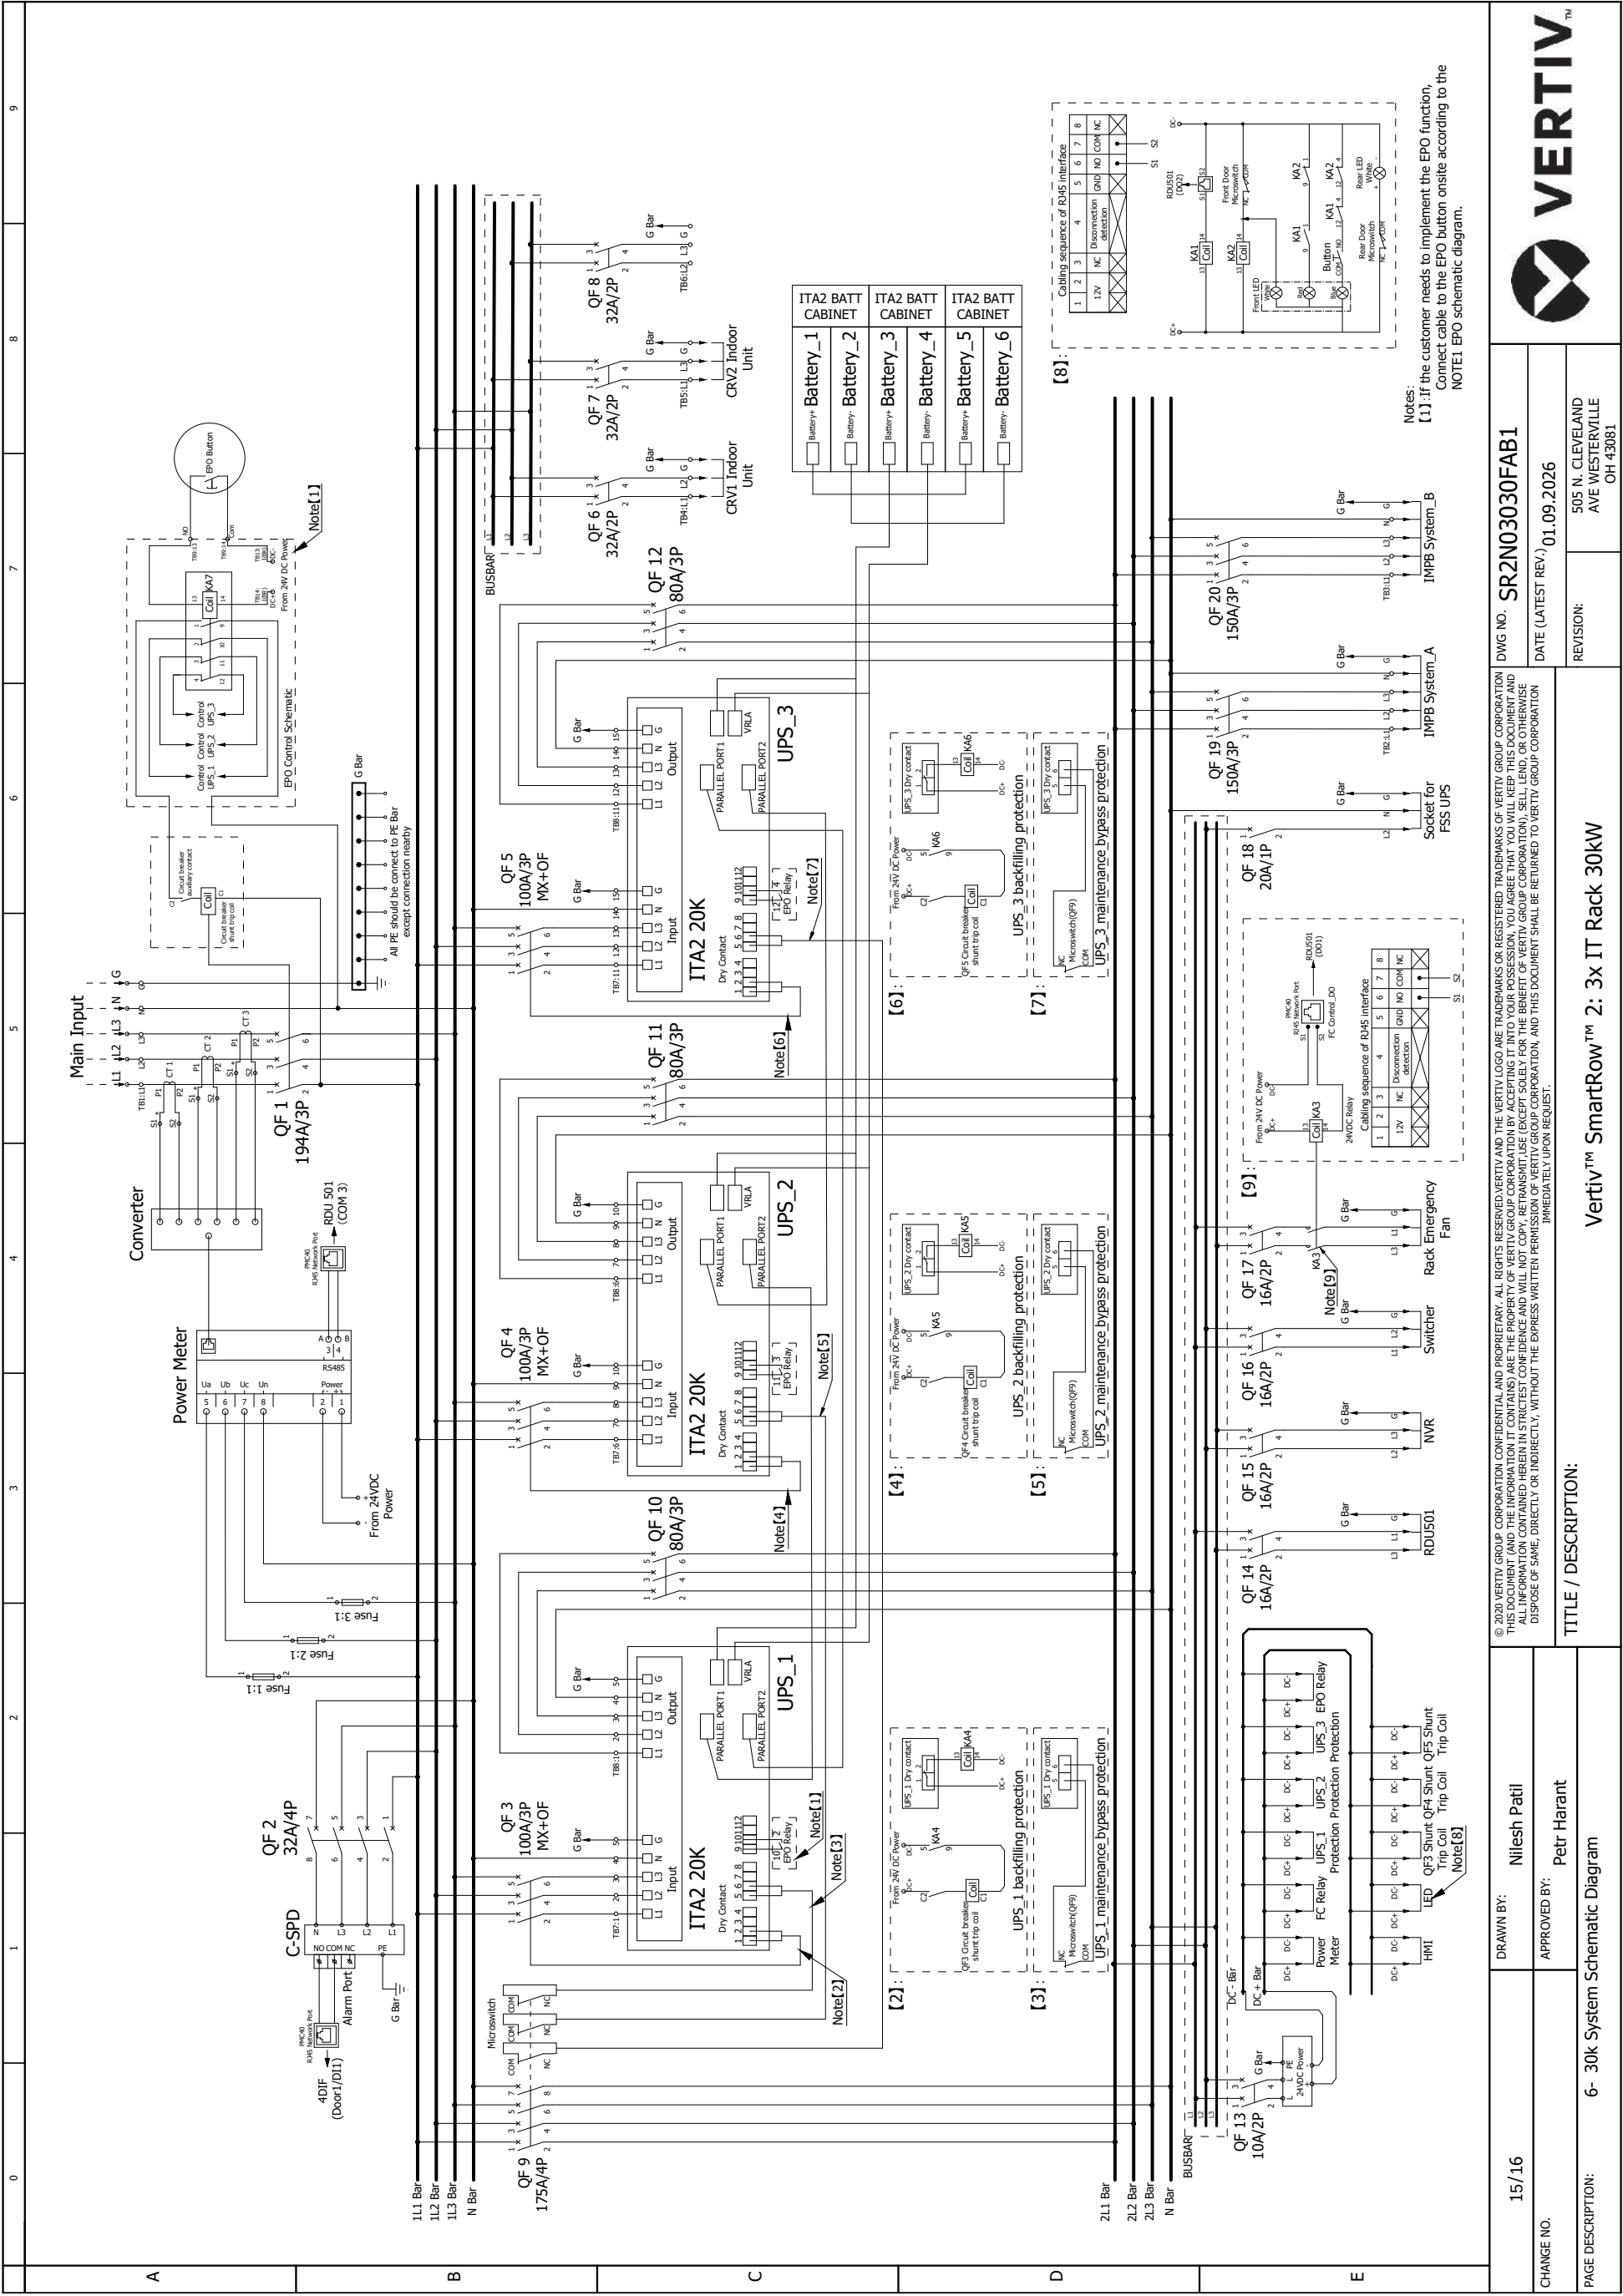

15/16

CHANGE NO.

DRAWN BY: Nilesh Patil

APPROVED BY: Petr Harant

6- 30k System Schematic Diagram

VERTIV™

SR2N03030FAB1

DATE (LATEST REV.): 01.09.2026

REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081

VERTIV™ SmartRow™ 2: 3x IT Rack 30kW

VERTIV™

15/16

CHANGE NO.

DRAWN BY: Nilesh Patil

APPROVED BY: Petr Harant

6- 30k System Schematic Diagram

VERTIV™

SR2N03030FAB1

DATE (LATEST REV.): 01.09.2026

REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081




VERTIV™ SmartRow™ 2: 3x IT Rack 30kW

VERTIV™



4. Field Supplied Cable & Part List


0		1		2		3		4		5		6		7		8		9	
FIELD SUPPLIED CABLE & PART LIST																			
PART		DETAILS																	
CANBUS CABLE (A)		4 conductors, 18AWG shielded cable + 1x RJ45 connector																	
CONDENSER INPUT POWER CABLE (B)		3 conductors + PE, 4 AWG copper cable																	
TEAMWORK CABLE (C)		CAT5 cable + 2x RJ45 connectors																	

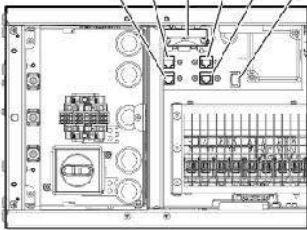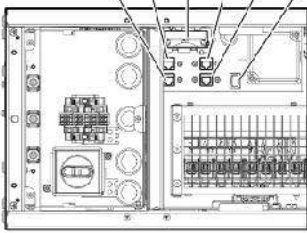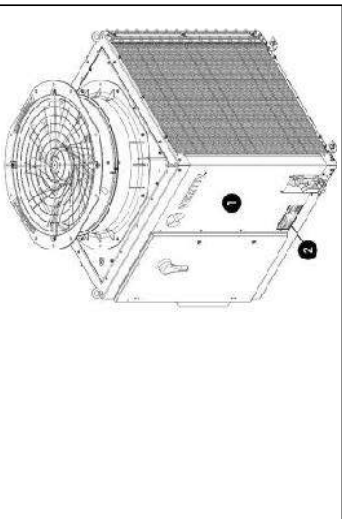A		B		C		D		E									
CRD0300-000A-SR2 (1)  <table><tr><th>PIN OUT</th><th>DESCRIPTION</th></tr><tr><td>Z4-1 / Z4-8</td><td>MODBUS A / B</td></tr><tr><td>Z4-4 / Z4-5</td><td>24VDC+ / 24VDC-</td></tr></table>		PIN OUT	DESCRIPTION	Z4-1 / Z4-8	MODBUS A / B	Z4-4 / Z4-5	24VDC+ / 24VDC-	CRD0300-000A-SR2 (2) 		CUD281-0000A0000 		(A)		(B)		(C)	
PIN OUT	DESCRIPTION																
Z4-1 / Z4-8	MODBUS A / B																
Z4-4 / Z4-5	24VDC+ / 24VDC-																


SHEET NO. 1 / 1		DRAWN BY: Petr Harant		© 2020 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, REPRODUCE, REUSE, RESELL, RE-TRANSMIT, OR OTHERWISE DISCLOSE OR OTHERWISE DISSEMINATE THIS INFORMATION TO ANY OTHER PERSON OR ENTITY WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.	
CHANGE NO.		APPROVED BY: Tomáš Krech		TITLE / DESCRIPTION: FIELD SUPPLIED CABLE & PART LIST	
PAGE DESCRIPTION:				DWG NO.	
				DATE (LATEST REV.)	
				REVISION:	
				505 N. CLEVELAND AVE WESTERVILLE OH 43081	
				VERTIV™	

[illegible]


7. CRD30

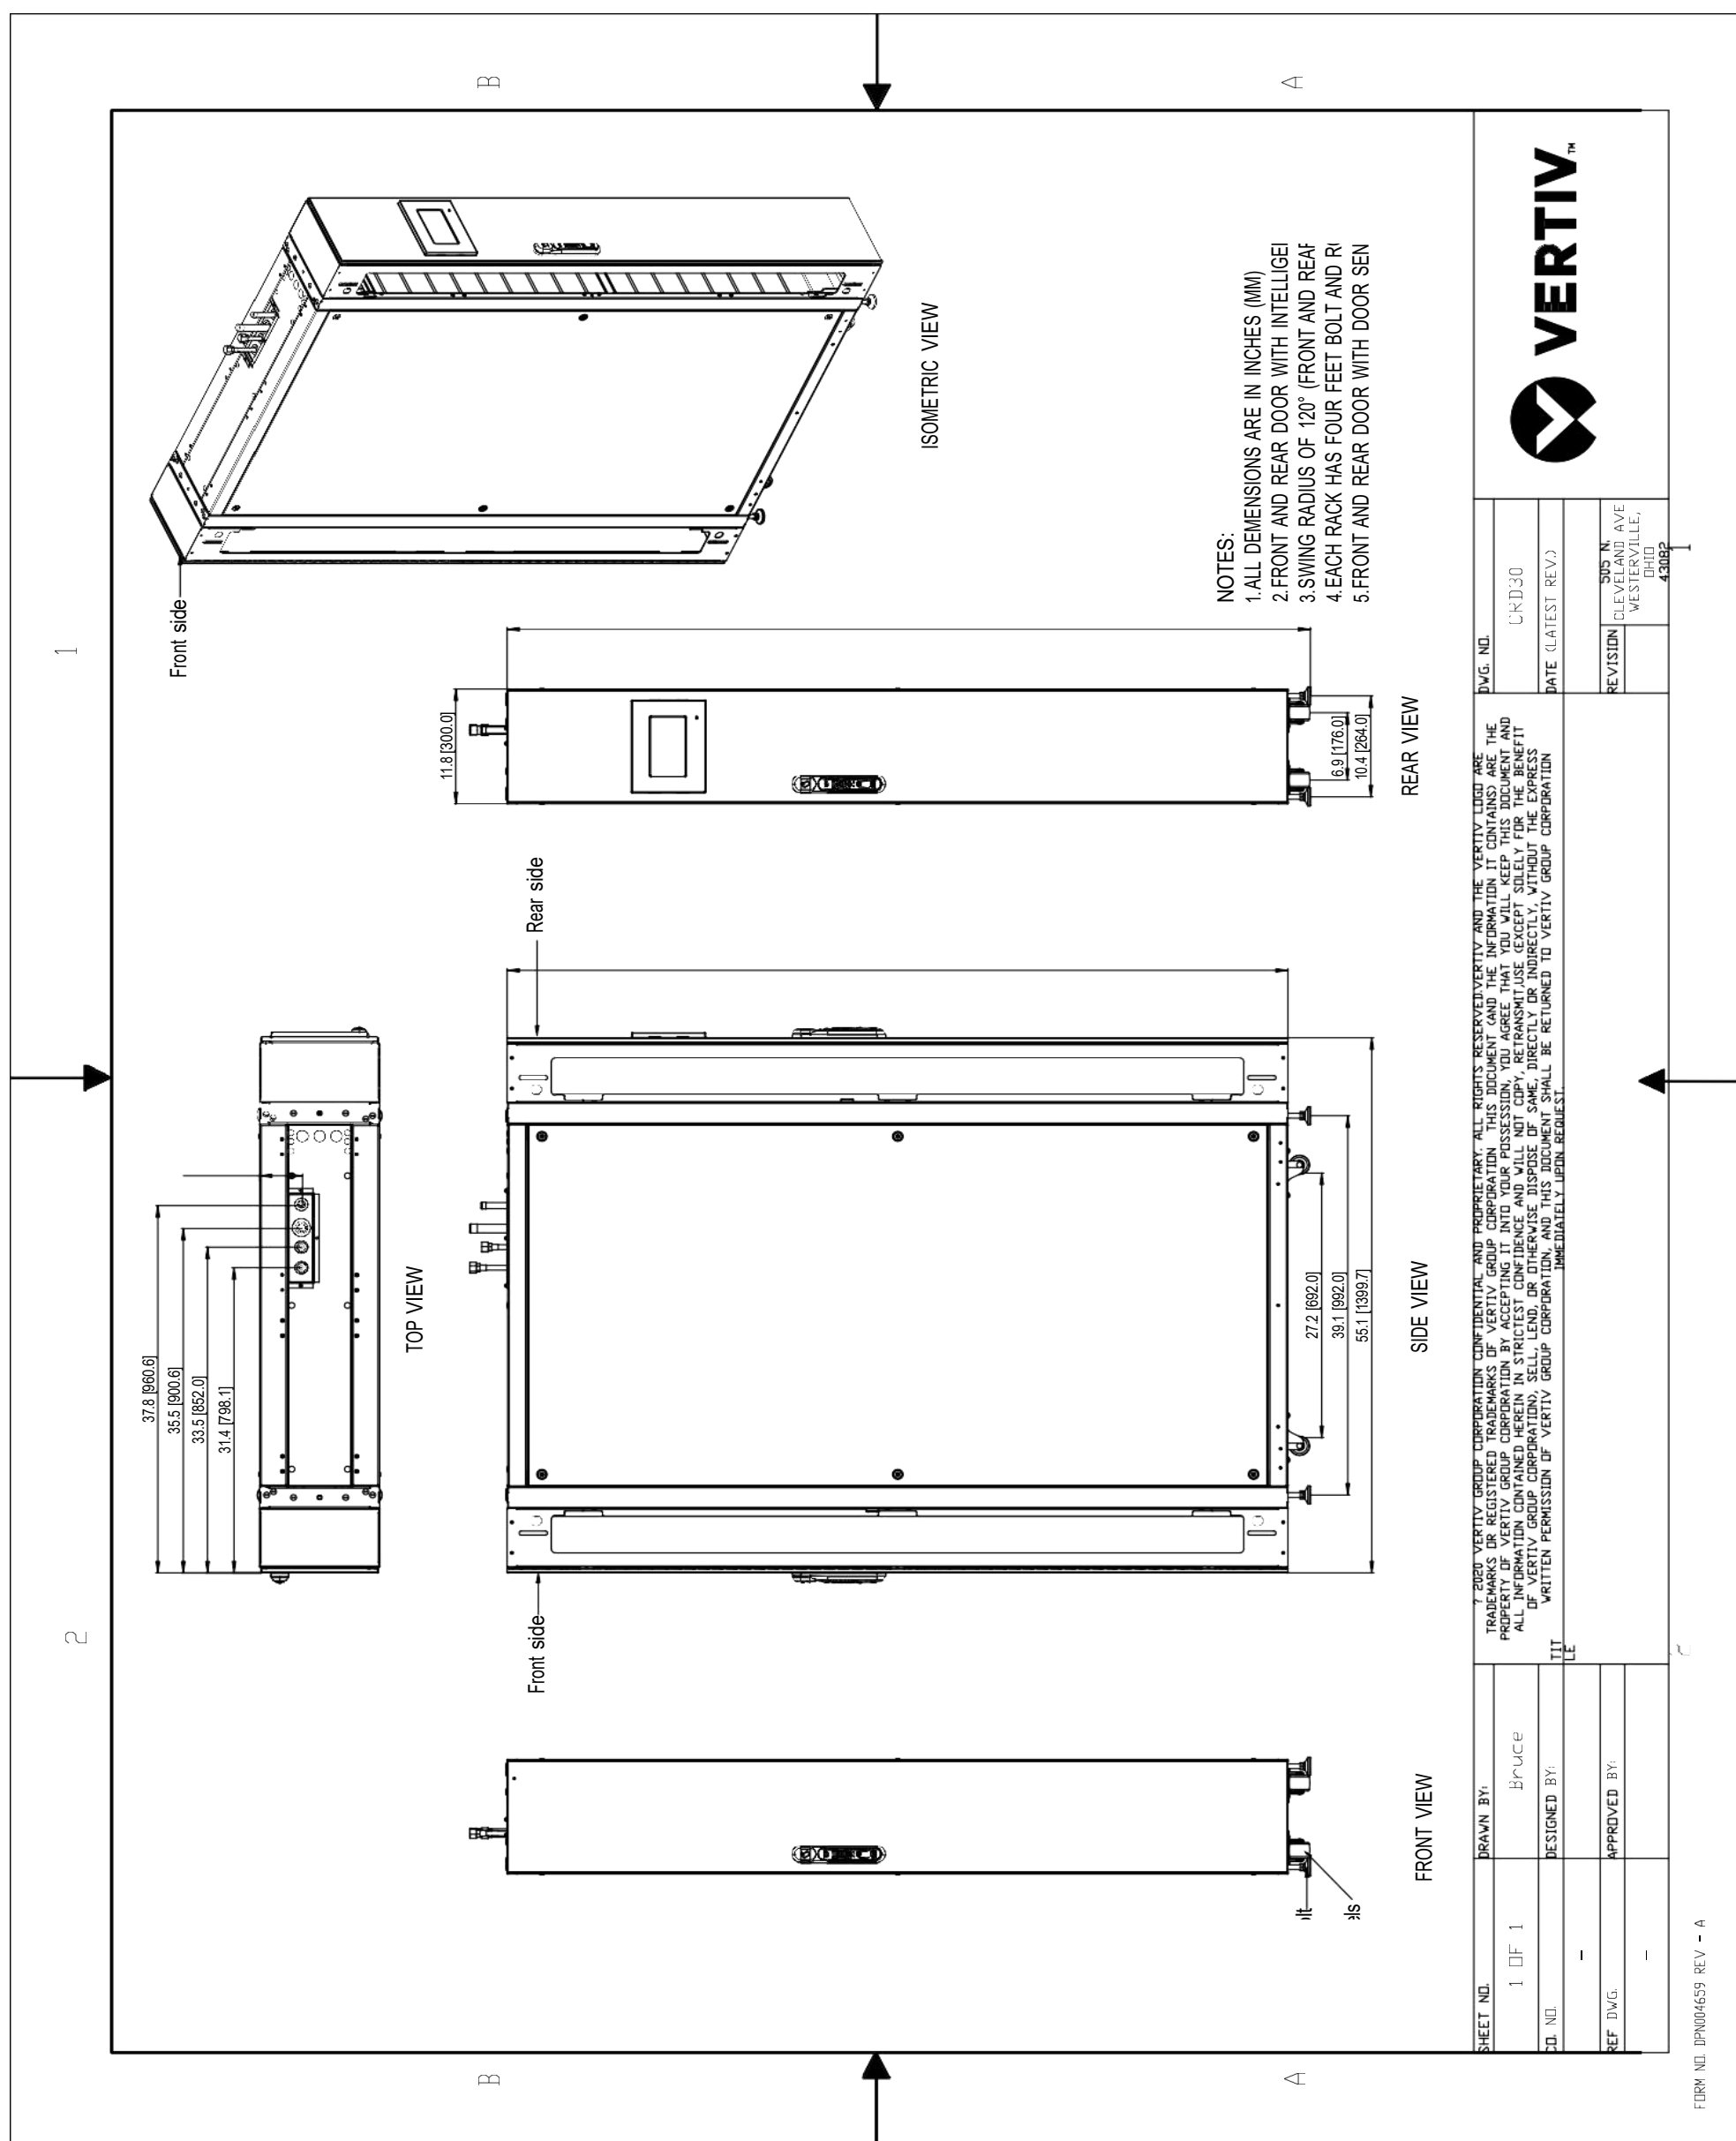


8. Plenum CRD30

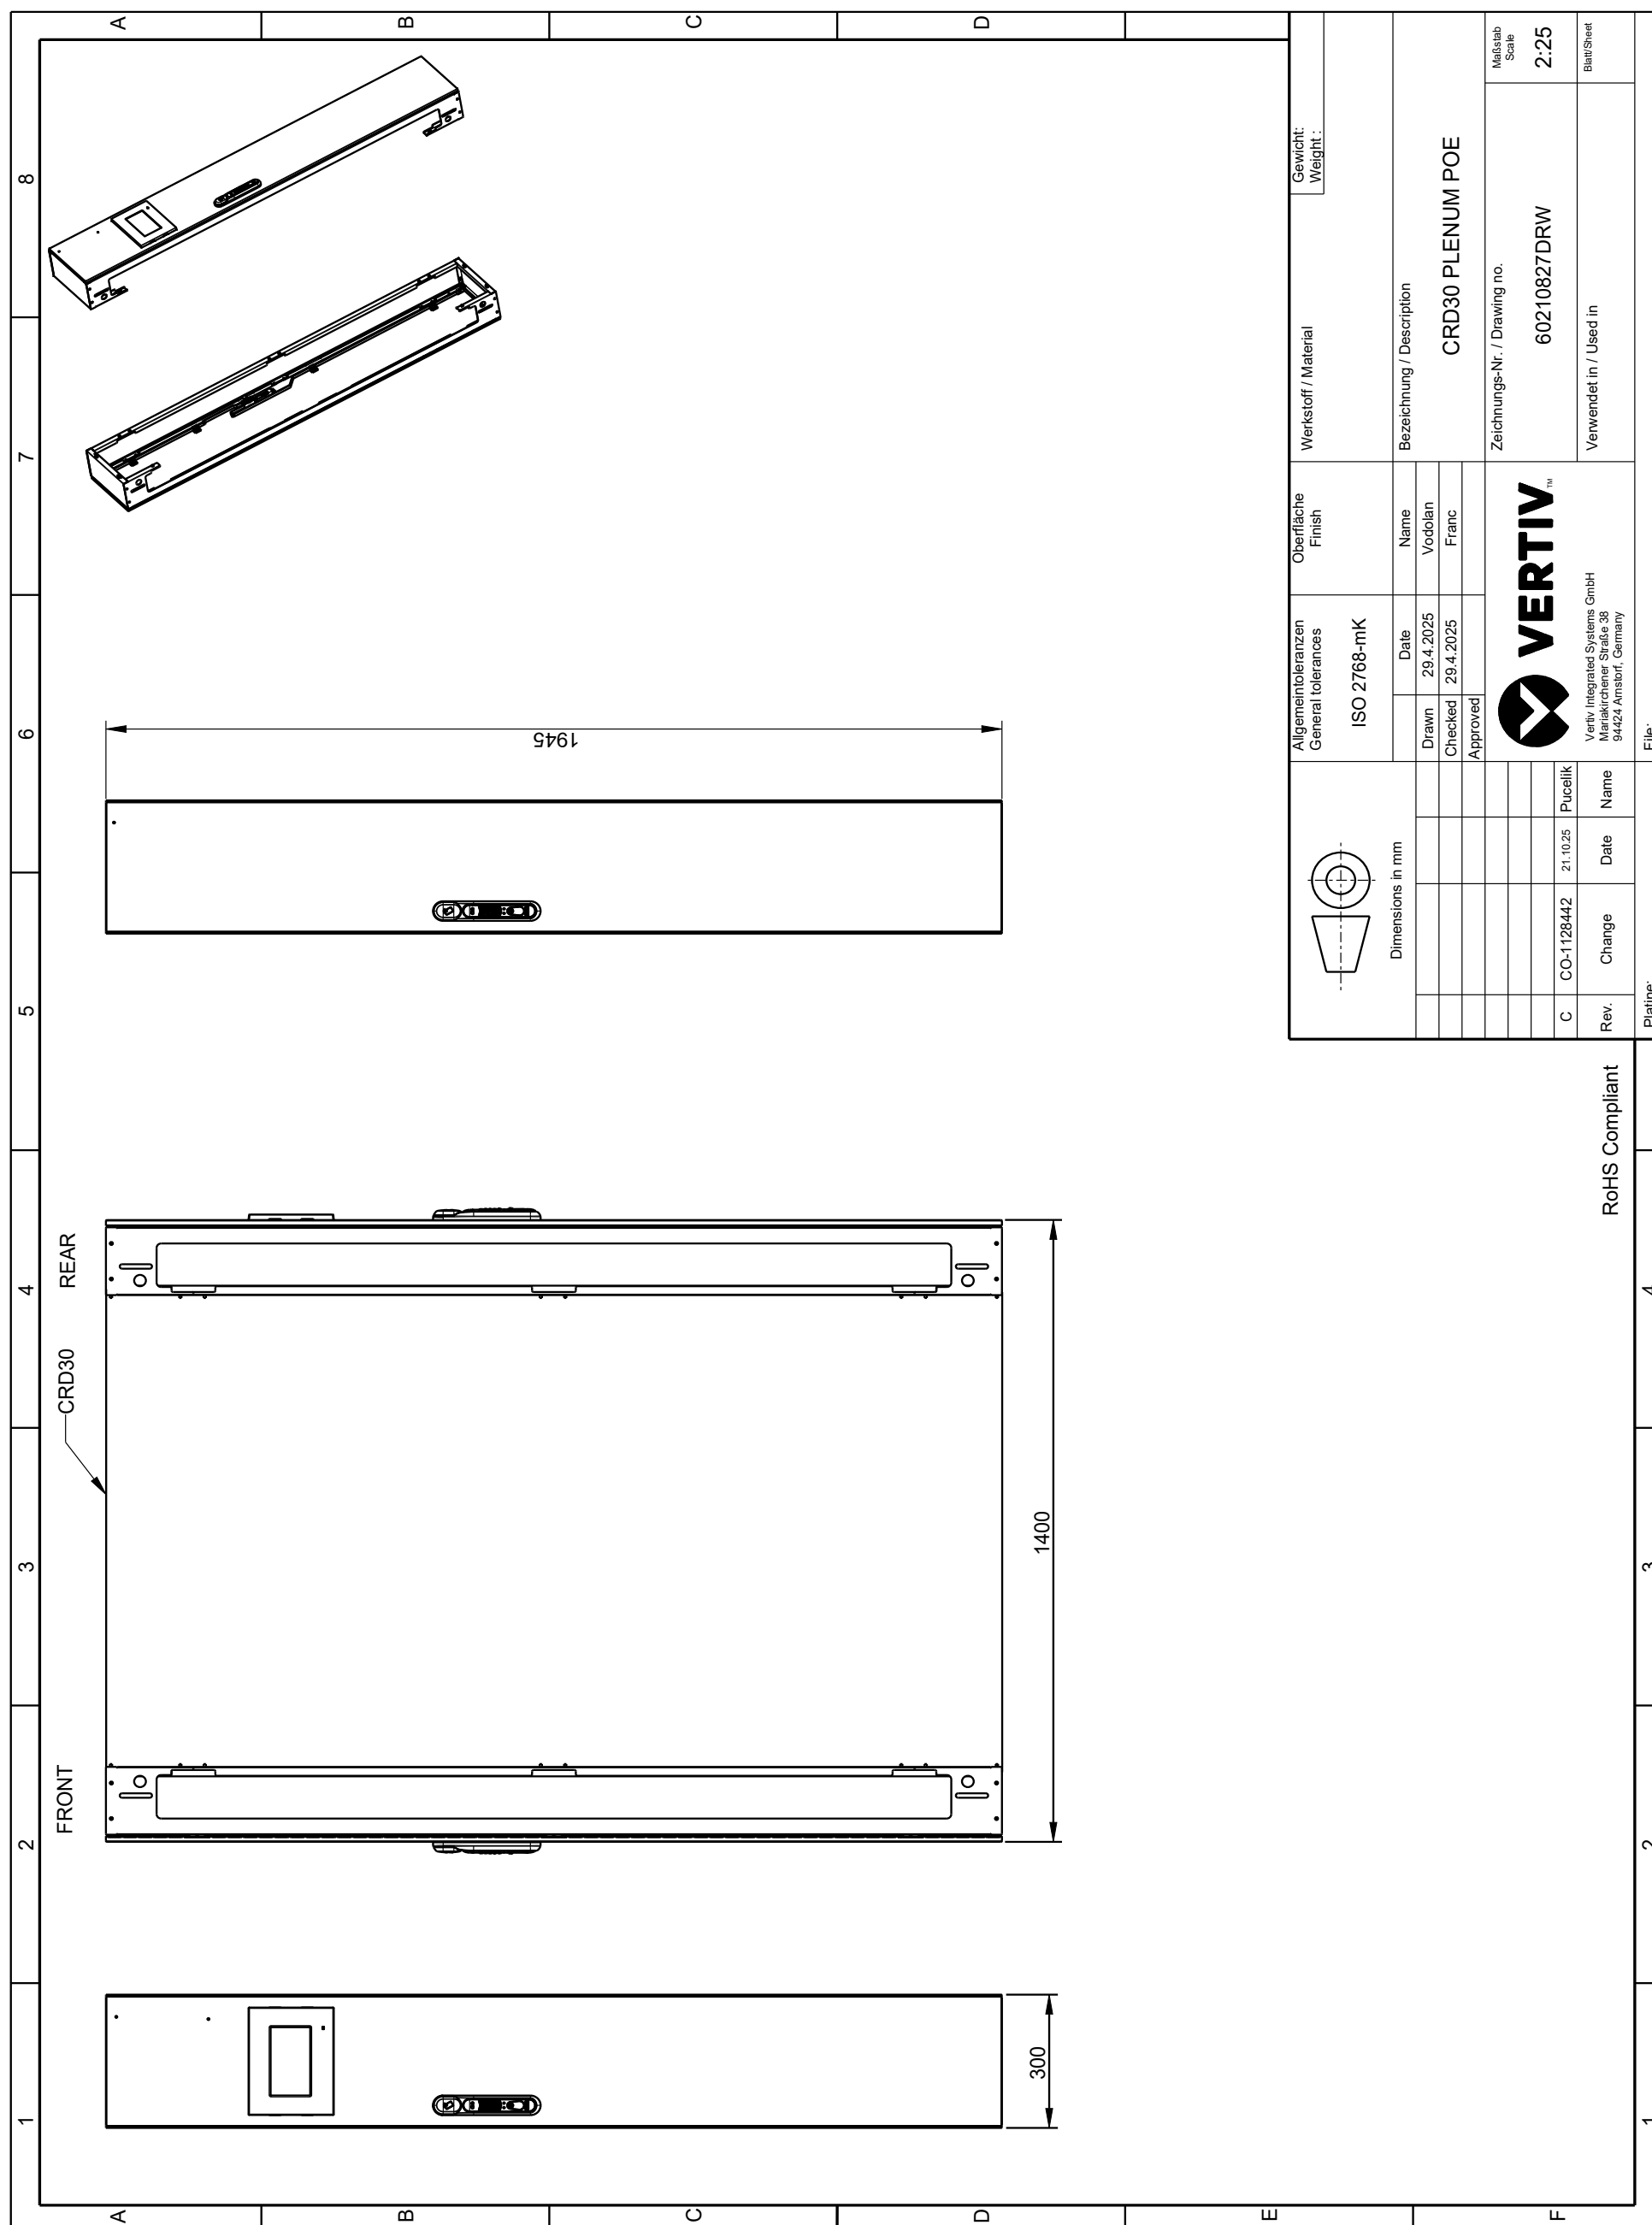


9. IMPB 4 BAR (T-IMPB-6.00-250-TPN-B-C1SKU)

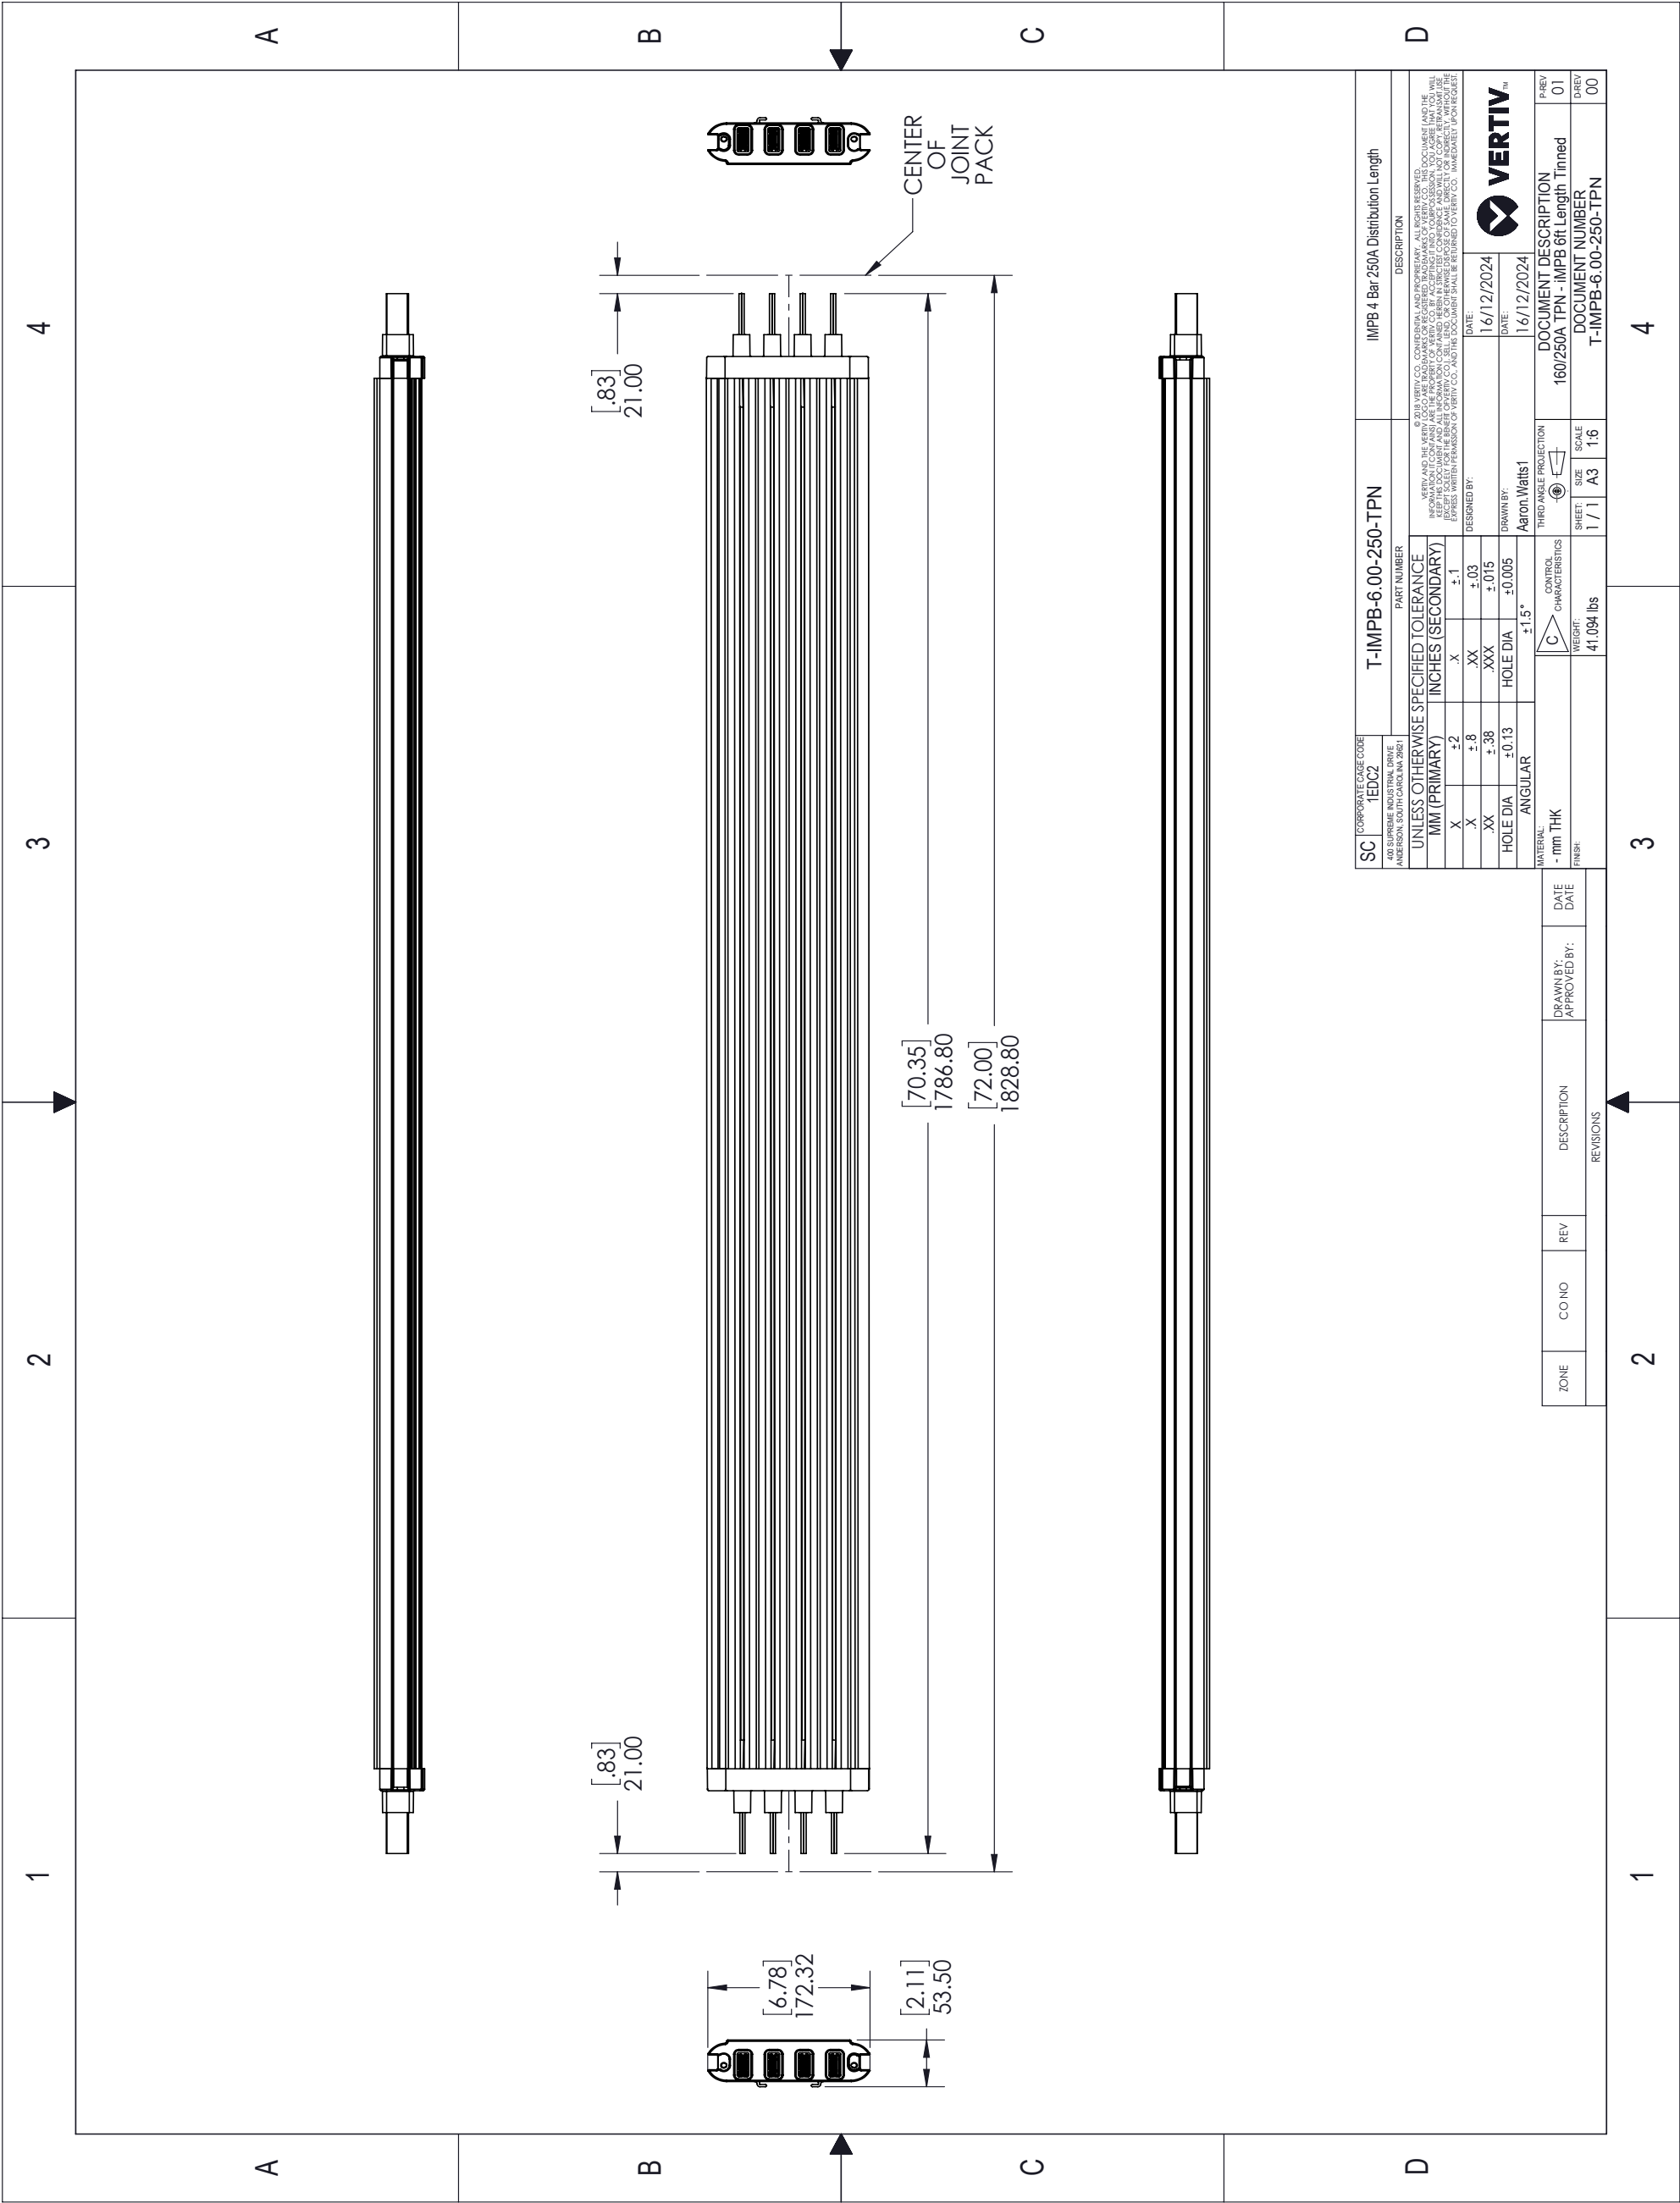

10. JOINT PACK (T-IMPB-JP-250-TPN-BE)

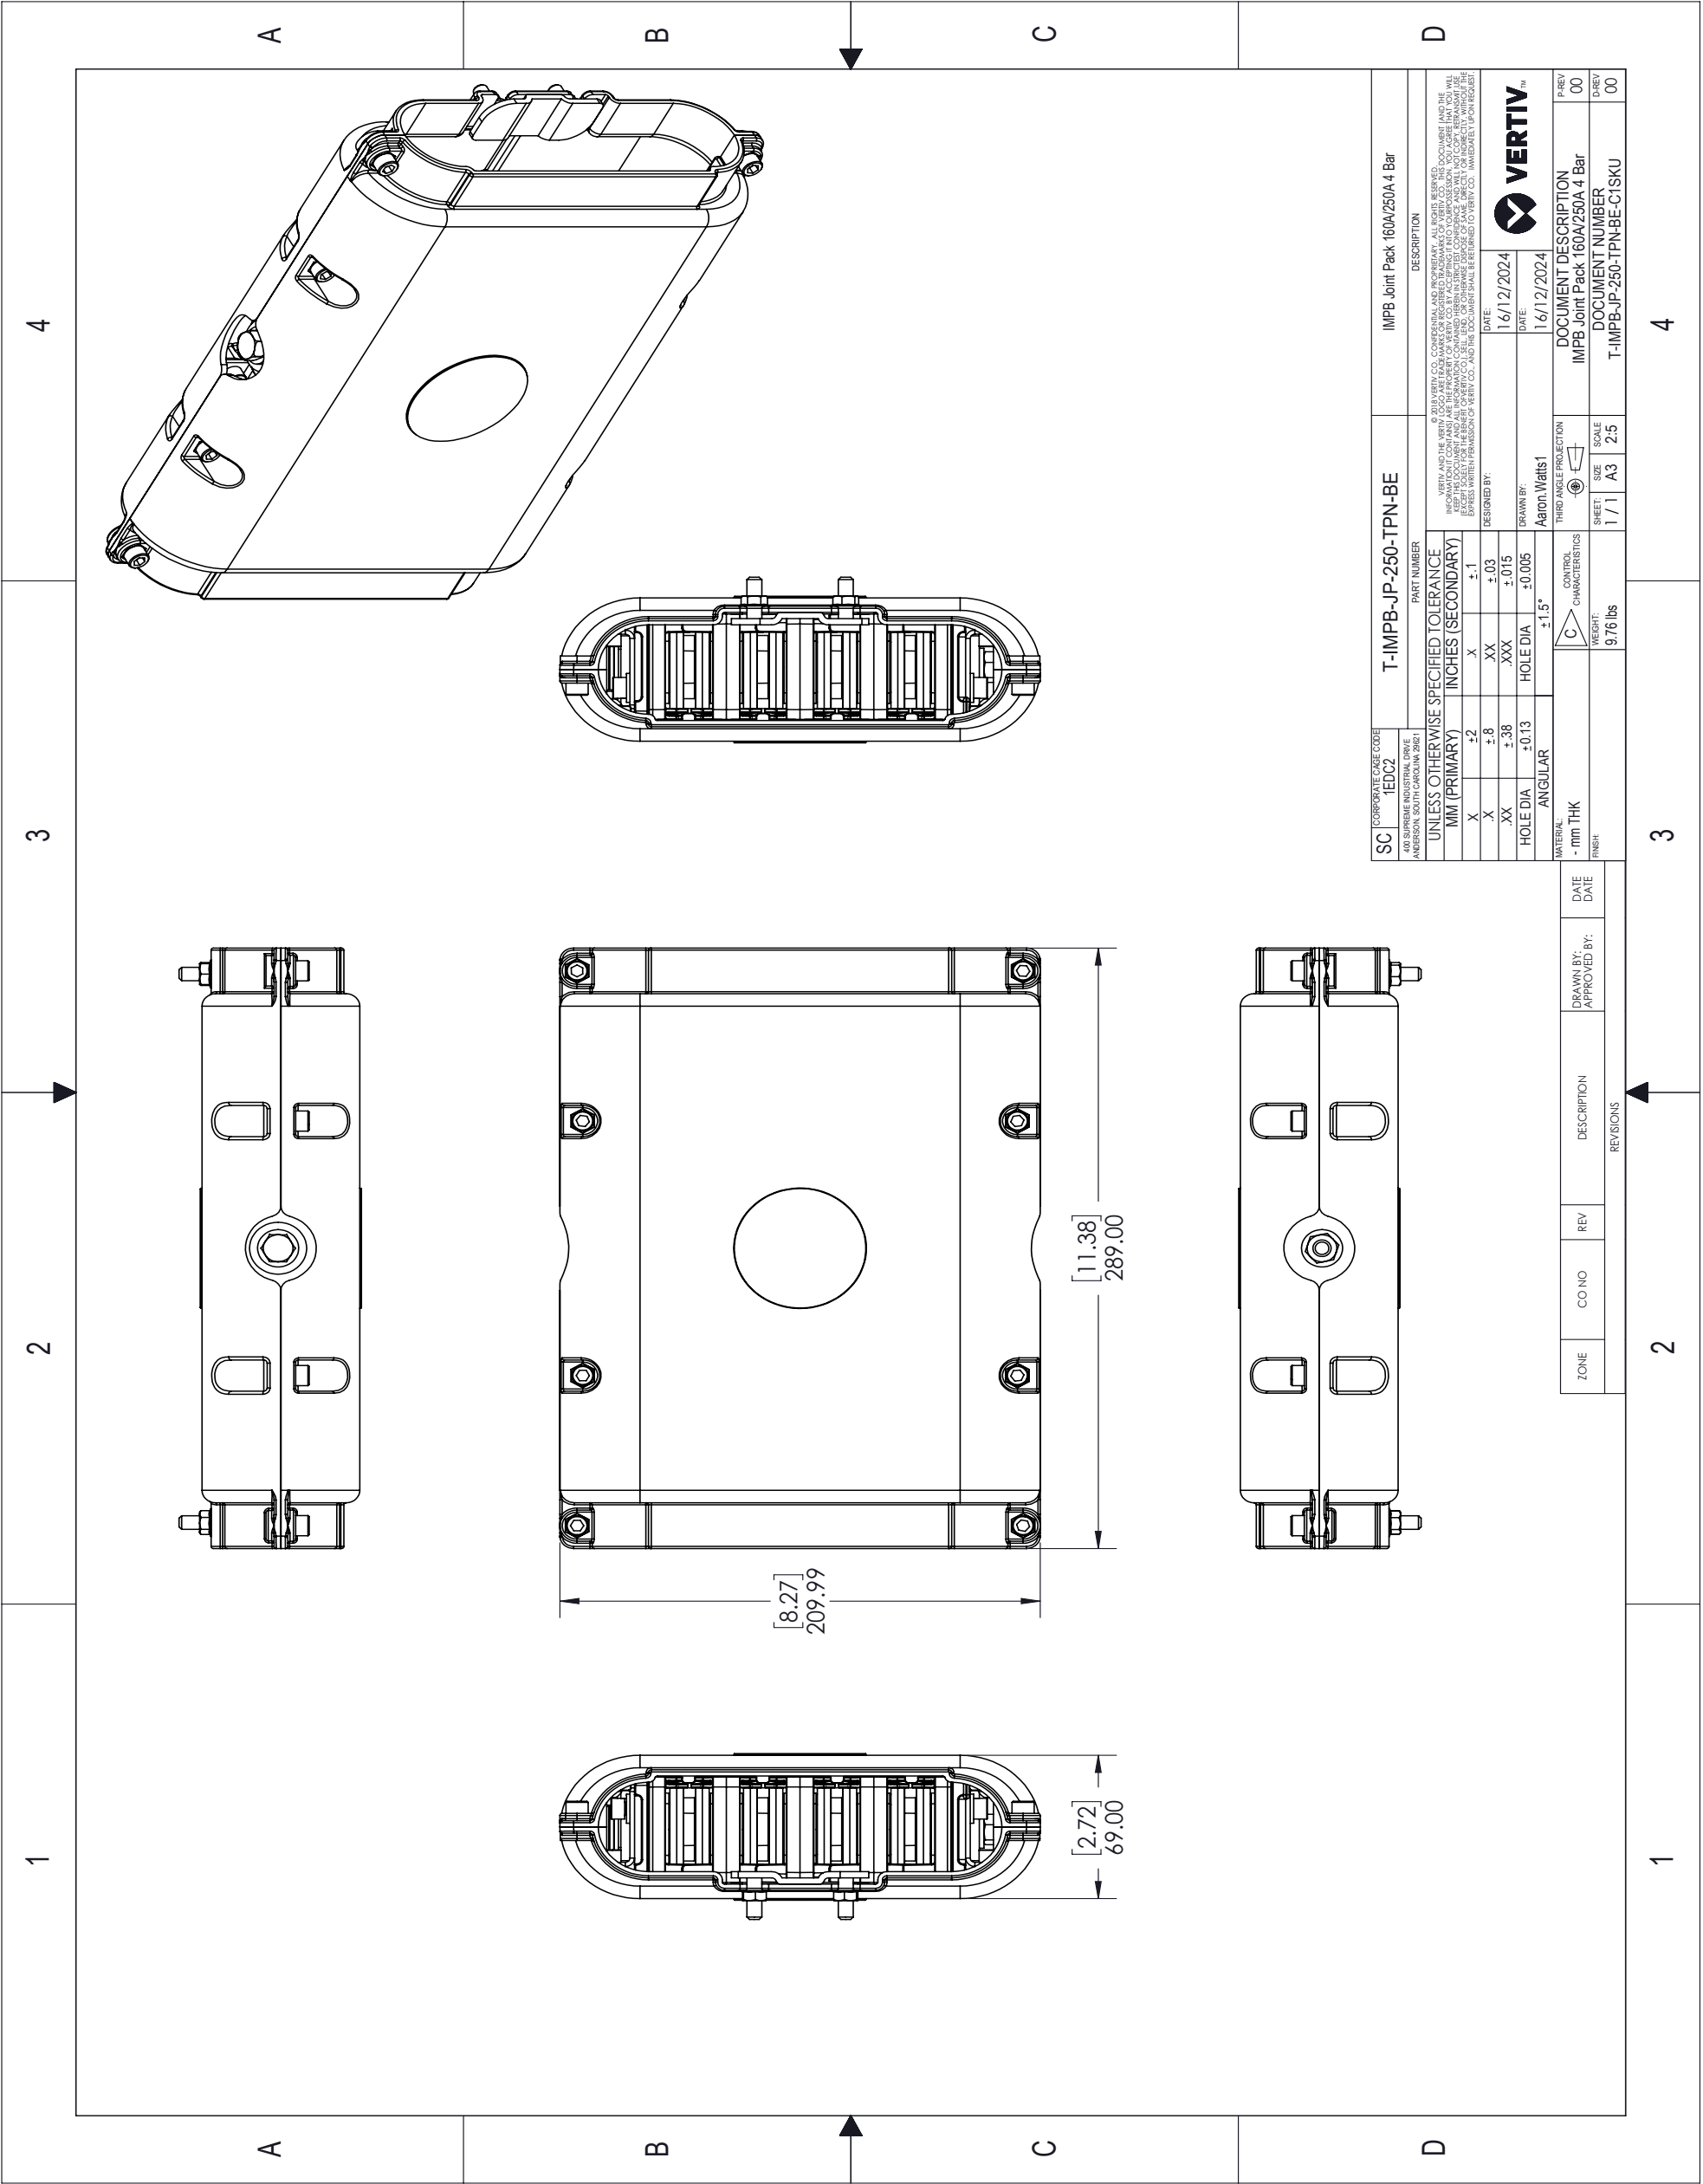

11. END CAP (IMPB-EC-4B-S)

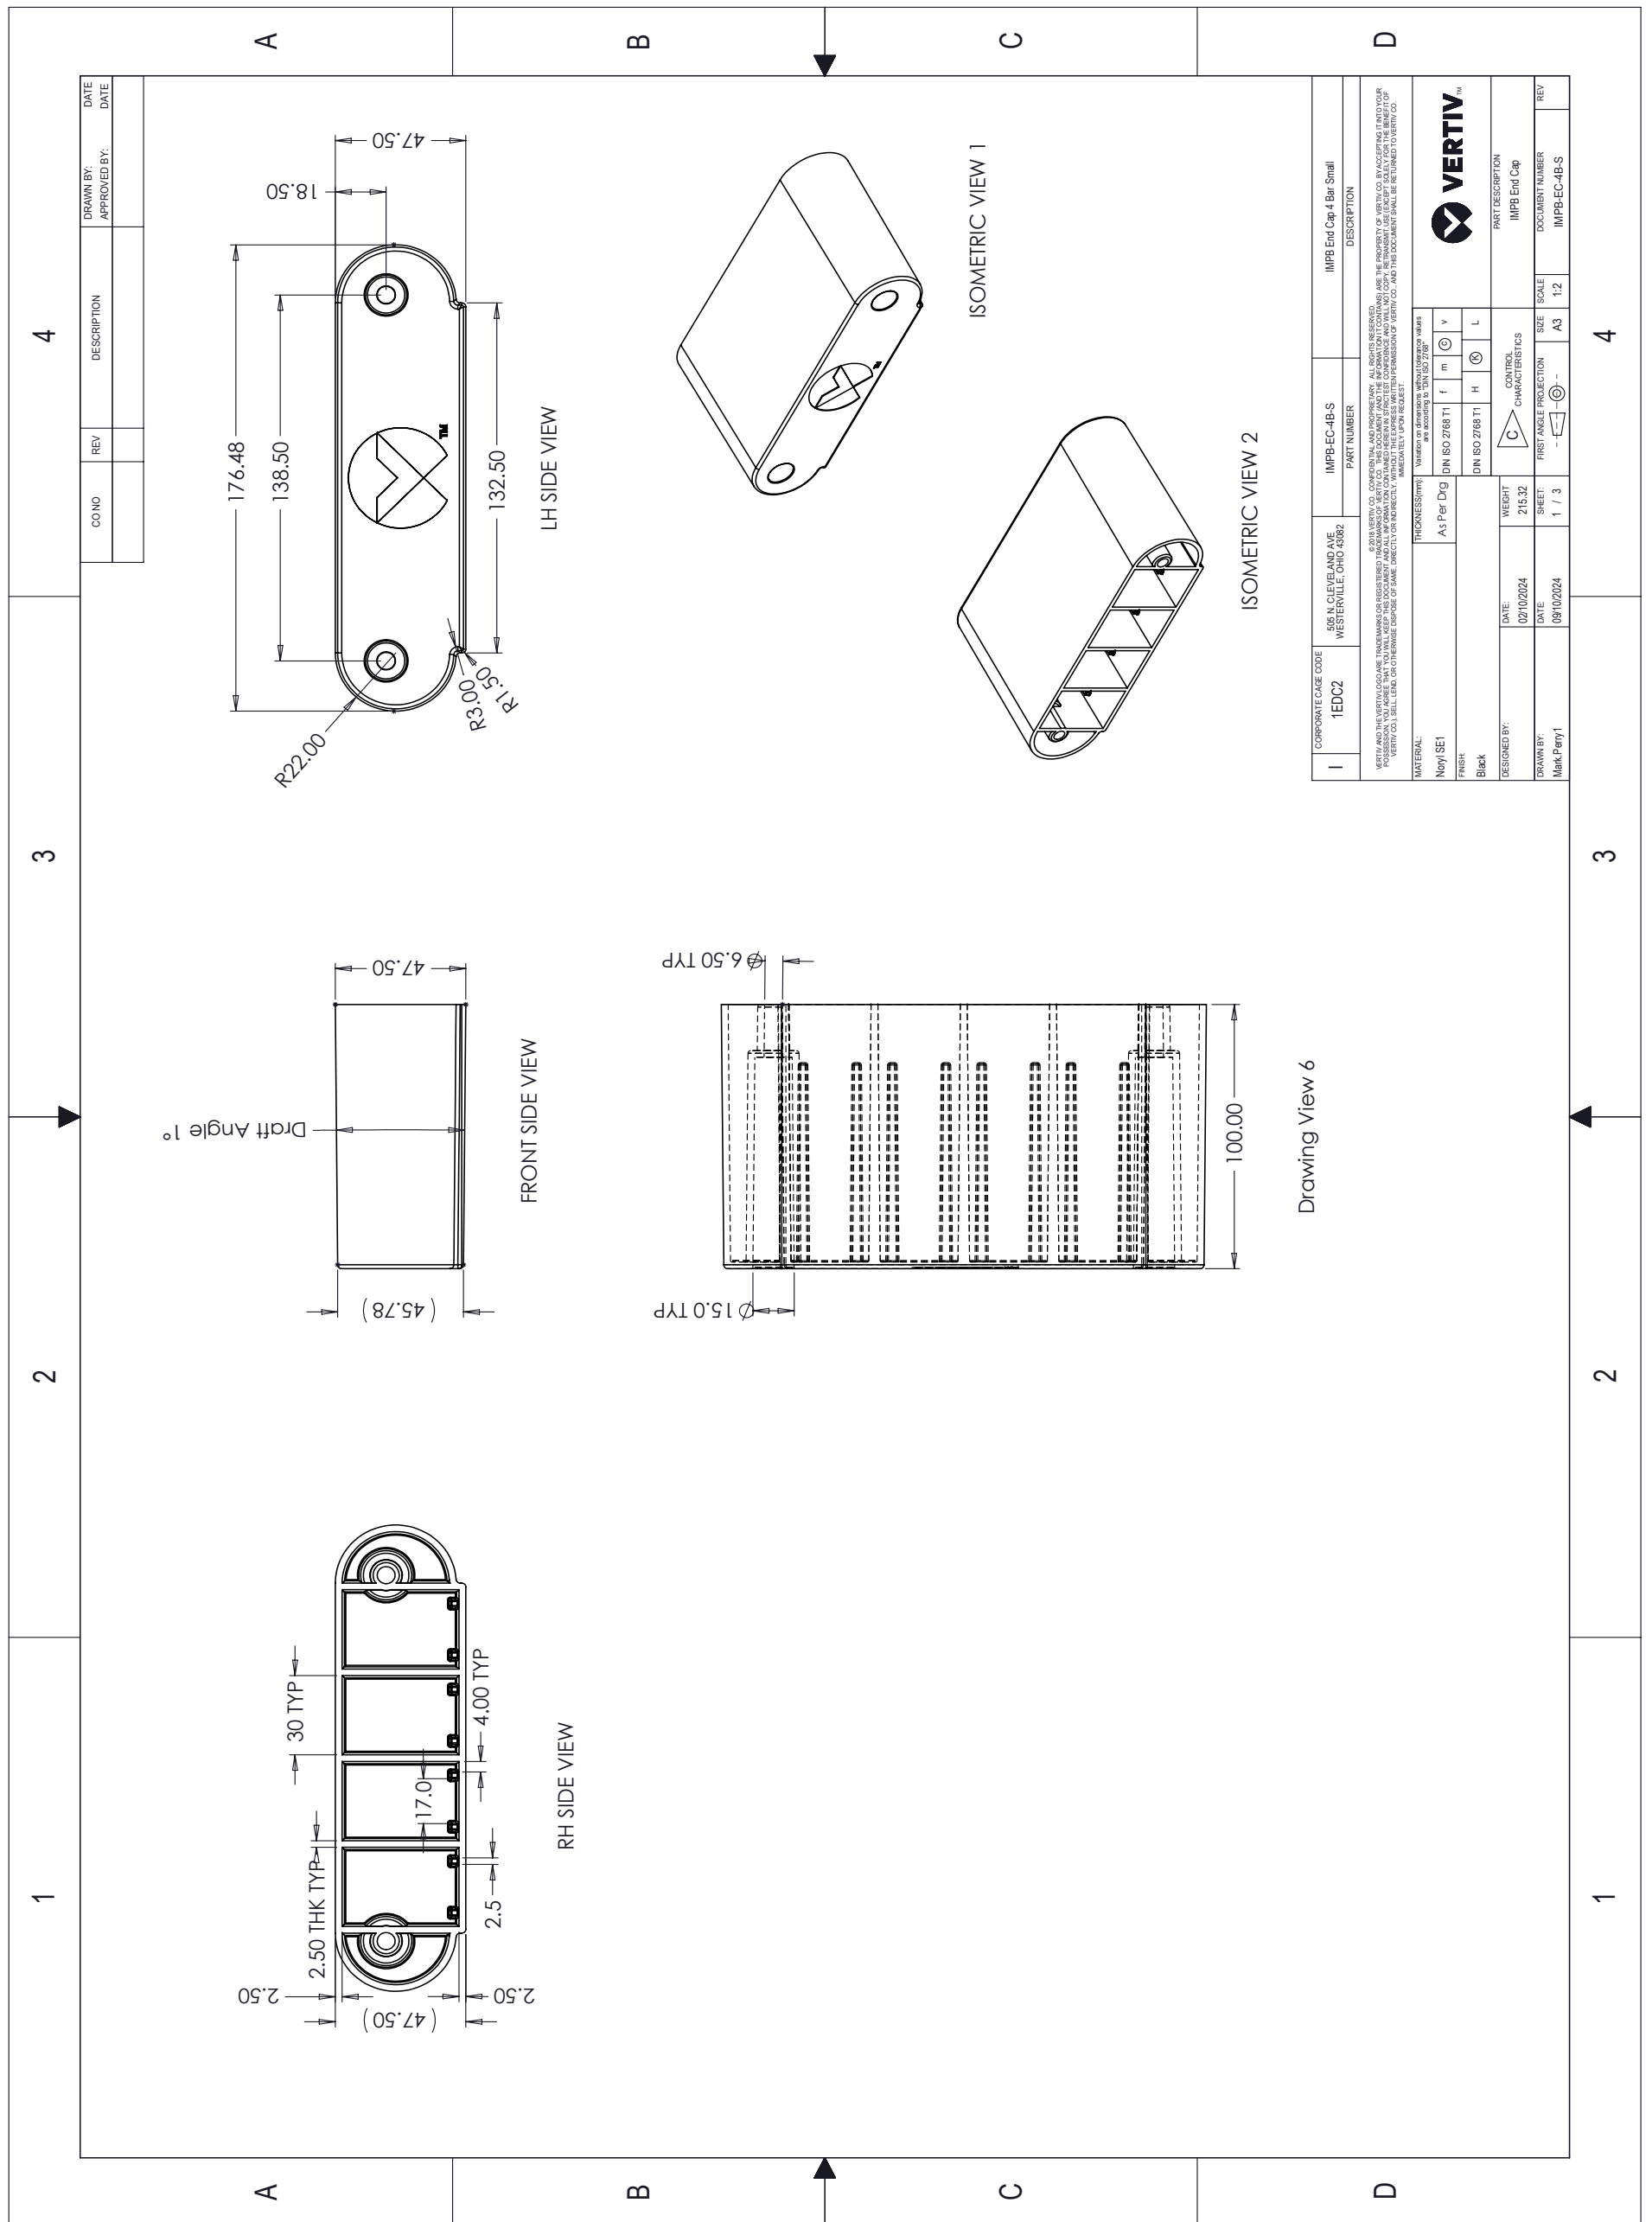

12. ROOF BRACKETS (C1 SKU IMPB-RMB-GA-001)

1 2 3 4

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	IMPB-RMB-001-2	Rack Mounting Bracket - Top Hat Base	1
2	IMPB-RMB-002-2	Rack Mounting Bracket - Busbar Mounting Plate	2
3	IMPB-HB13	iMPB Vertical Fixing Bracket HB13	4

A B C D

14.64
372.00
15.75
400.00
8.94
226.98
3.50
89.00

M10x20 HH BOLT + M10 NUT (QTY 4)
M6x10 HH BOLT + M6 DOME WASHER (QTY 10)


ZONE	CO NO	REV	DESCRIPTION	DRAWN BY:	DATE

SC	CORPORATE CAGE CODE	1EDC2	400 SUPREME INDUSTRIAL DRIVE ANDERSON, SOUTH CAROLINA 29621
UNLESS OTHERWISE SPECIFIED TOLERANCE			
MM (PRIMARY)			
X	+2	X	+1
X	+8	XX	+03
XX	+38	XXX	+015
HOLE DIA	+0.13	HOLE DIA	+0.005
ANGULAR	+1.5°		
MATERIAL SEE DETAILS - mm THK			
FINISH XXX			
WEIGHT 7.750 lbs			
THIRD ANGLE PROJECTION			
DRAWN BY: AARON WATTS1			
DATE: 16/12/2024			
DESIGNED BY: 16/12/2024			
DATE:			
VERTIV			
© 2019 VERTIV CORPORATION. ALL RIGHTS RESERVED. THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF VERTIV CORPORATION. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM VERTIV CORPORATION.			
PART NUMBER			
C1 SKU IMPB-RMB-GA-001			
DESCRIPTION			
IMPB Roof Mounted Brackets c/w HB13 Hanging Brackets			
DOCUMENT DESCRIPTION			
IMPB Roof Mounted Brackets c/w HB13 Hanging Brackets			
DOCUMENT NUMBER			
C1 SKU IMPB-RMB-GA-001			
PREP			
DREV			
00			

1 2 3 4

[illegible]

14. IMPB CEB 250A TPN (C25C4B208VN2000NNNW00GC)

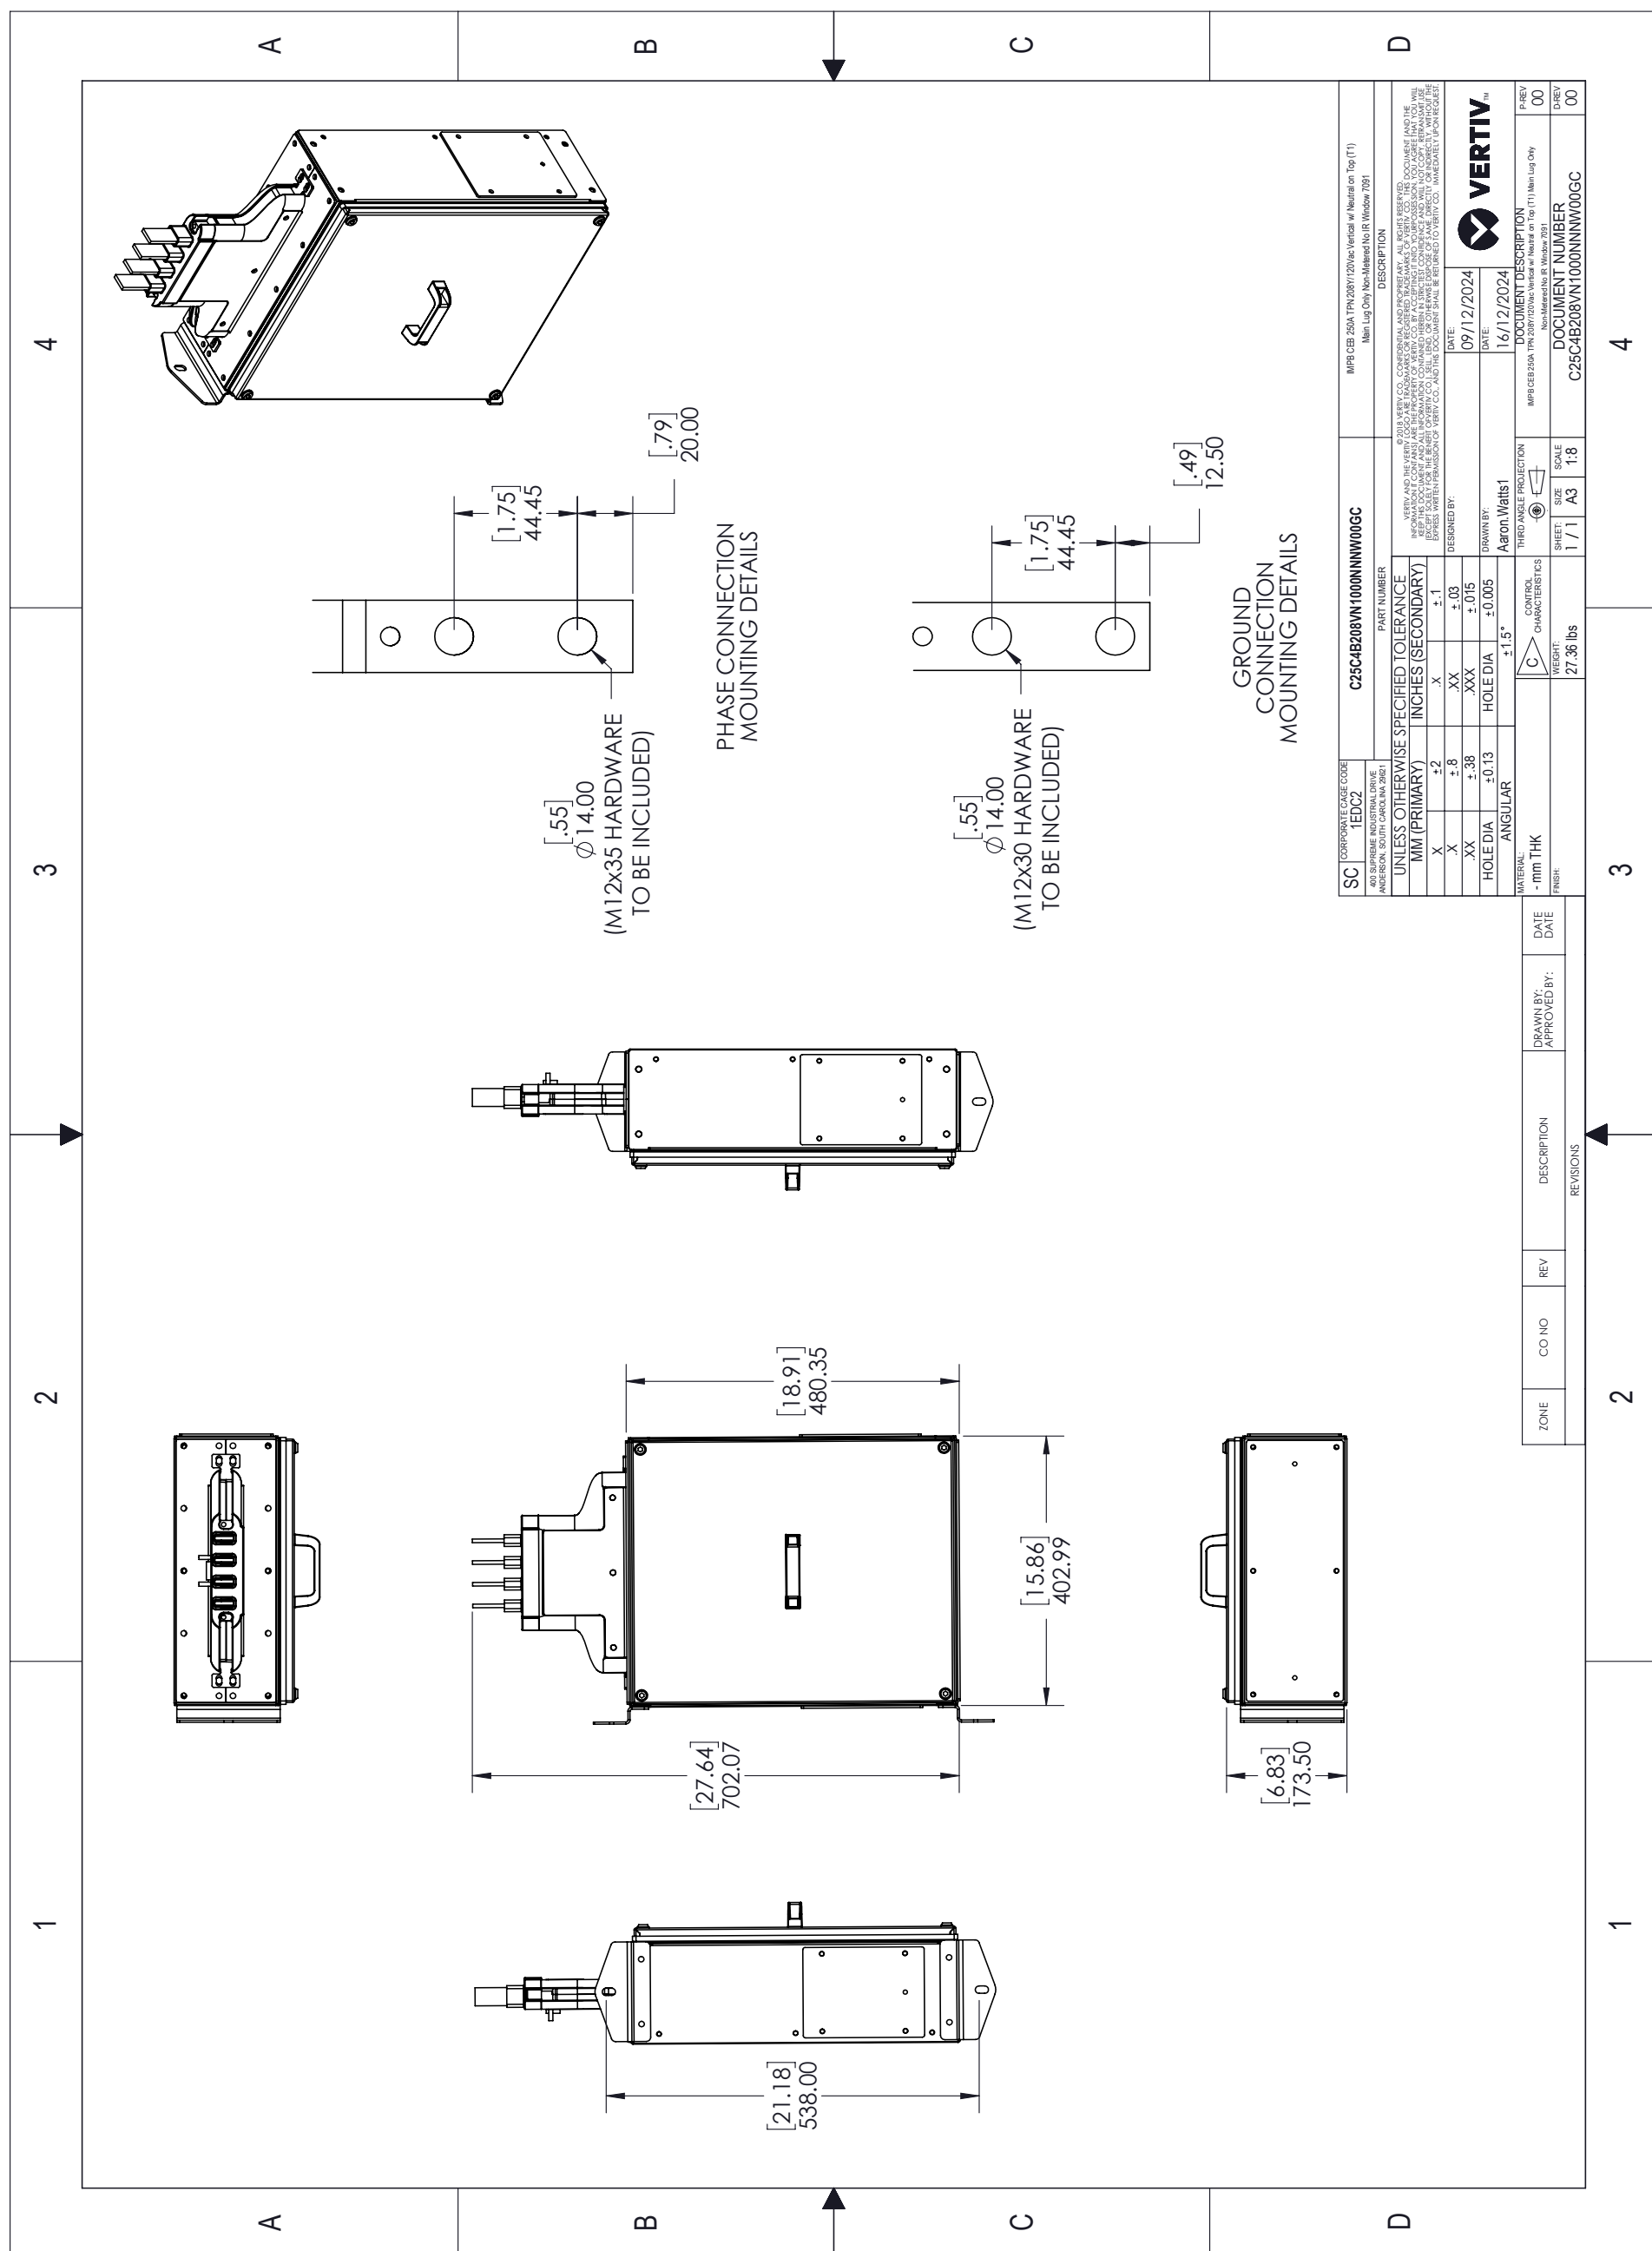

1 2 3 4

A B C D

PHASE CONNECTION MOUNTING DETAILS

GROUND CONNECTION MOUNTING DETAILS

SC 1EDC2 400 SUPRME INDUSTRIAL DRIVE ANDERSON, SOUTH CAROLINA 29621

C25C4B208VN200NNW00GC

IMPB CEB 250A TPN 28Y120Vac Vertical w/ Neutral on Top (T2) Main Lug Only Non-Metered No IR Window 7091

DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE INCHES (SECONDARY)

MM (PRIMARY)

X ±.2 X ±.1

X ±.8 XX ±.03

XX ±.38 XXX ±.015

HOLE DIA ±0.13 HOLE DIA ±0.005

ANGULAR ±1.5°

MATERIAL: mm THK

CONTROL CHARACTERISTICS

WEIGHT: 27.36 lbs

THIRD ANGLE PROJECTION

DRAWN BY: Aaron Watts1

DATE: 09/12/2024

DATE: 16/12/2024

VERTIV

DOCUMENT DESCRIPTION

IMPB CEB 250A TPN 28Y120Vac Vertical w/ Neutral on Top (T2)

DOCUMENT NUMBER

C25C4B208VN200NNW00GC

REVISIONS

ZONE CO NO REV DESCRIPTION DATE DATE

1 2 3 4

A B C D

16. SCOPE OF WORK

SMART ROW 2 – ASSEMBLY & START-UP

SERVICE SUMMARY

Feature	Detail
On-site Service	One site trip within the 48 contiguous states to start-up the system. Visit to be scheduled by the customer between 8am-5pm, Monday-Friday (excluding national holidays).
Customer Support	Includes access to the Customer Resolution Center (1-800-543-2378) and the Vertiv Customer Services Network Online Internet portal for extent of product warranty.
Consolidation	The SmartRow2 includes numerous shippable units (typically pallets or boxes) that originate from multiple factories and suppliers. Vertiv consolidates these items into a single customer shipment and reduces the likelihood of shippable units being lost at the customer site. This benefits the customer by relieving the burden of keeping track of multiple partial shipments.
Inside Delivery	Vertiv Service will move the shippable units from the delivery truck to the Staging Area. Vertiv Services will unpackage the shippable units and remove/dispose of the packaging material so that it is ready for assembly. Vertiv will verify that all material on the sales order has been received.
Project Management	Included with Consolidation and Inside Delivery. Vertiv will assign a project manager for the project. The Project Manager will supervise the Consolidation and Inside Delivery Process and communicate hardware shipment schedules with the customer.
Assembly	SmartRow2 is assembled onsite by Vertiv factory-trained and authorized technicians equipped with Vertiv. Proprietary tools and software. Vertiv CEs and Vertiv Partners are the only approved OEM service providers for Vertiv products. These technicians are supervised by a Site Manager who also gathers site- specific requirements like safety and work procedures.
Factory Startup	Warranty inspection and startup validates the warranty and initializes the warranty coverage period.

SERVICE PERFORMED

Consolidated Shipment

Shippable units may be available at time of order or built-to-order with a lead time. Vertiv safely stores these items in-warehouse until the customer is ready to receive the SmartRow2 in a single shipment. Other limits may apply; see Assumption and Clarifications as applicable for more details.

Inside Delivery

Vertiv Services will deliver the shippable units from the delivery truck to the Staging Area. Vertiv Services will unpackage the shippable units and remove/dispose of the packaging material so that it is ready for assembly. Vertiv will verify that all material has been received.

Change order option:

- There must be an appropriate loading dock with continuous, level floor from the dock to the staging area. If the shippable units must be moved up/downstairs, the customer must provide a suitable elevator, or charges for special rigging will be incurred. If the customer does not have an appropriate loading dock, nominal charges may/ may-not apply for a lift-truck delivery.

Project Management

Vertiv will assign a project manager and a site manager for the project.
The Project Manager will supervise the Consolidation and Inside Delivery Process and communicate schedules with the customer.
The Site Manager will supervise the assembly, startup, warranty inspection and turn over the SmartRow2 to the customer.

Site-Specific Requirements

All personnel will be available for up to two hours per week for Site Access, Safety Training, and other site-specific requirements.

Change Order Option:

- Vertiv can quote a price for additional man-hours if 2 hours per week is insufficient.

Assembly

There shall be continuous, level floor between the Staging Area and the Installation Location so that heavy items can be moved via casters/pallet jacks.

Change Order Option:

- If there is not continuous level floor, the customer must provide or pay for any necessary lift/rigging equipment.

Vertiv PMC, including RDU501 SmartRow2 Controller/Display

Vertiv will position, level, and bay together the PMC as described in the submittal documents. The customer is responsible for providing primary electrical power to the PMC.

Vertiv will program and configure the SmartRow2 RDU501 controller/display. This includes setting IP addresses so that the customer can monitor the system status remotely.

Change Order Option:

- Vertiv will quote IP addressing of equipment on the customer network, but this would be done by other personnel and scheduled separately. This is outside the scope of SmartRow2 assembly.

Vertiv IT Rack(s)

Vertiv will position, level, and bay together the Vertiv IT Racks as described in the submittal documents. Vertiv will not populate racks with customer IT gear, including blanking panels, servers, shelves, etc.

The customer must define addressing conventions (1,2,3,4, right-to-left or left-to-right) prior to start of work.

Cable Trays

Vertiv will install the SmartRow2 cable trays that are included with the SmartRow2 solution as described in the submittal documents.

Liebert® CRV's, Temperature Sensors, Modbus cables, and associated Plenums

Vertiv will position and level the Liebert® CRV and attach the associated plenums to provide cooling to the SmartRow2.

Vertiv will connect the necessary temperature sensors.

The customer is responsible for piping and primary power to the CRV along with connecting CANBus cable between the CRV and heat rejection. All specific requirements (such as piping traps and proper electrical grounding) for correct product installation are detailed in the product installation manual.

After the SmartRow2 is assembled and the Liebert® CRV is piped and powered by the customer in accordance with the product installation manual, Vertiv will perform a factory warranty inspection along with the rest of the SmartRow2.

Liebert® MC / CCD Condensers for Liebert® CRVs

The customer is responsible for installing the associated heat rejection. This includes primary power, CANBus communication wire, piping, refrigerant charging, and all other tasks in the Installation Manual. Any/all penetration points in the walls/ceilings/floors for any wiring or piping are also the customer's responsibility.

Rack PDUs

Vertiv will install and connect all rack PDUs (if applicable) including GXT5 power extensions (if applicable) as described in the submittal documents.

Liebert® GXT5 Single Phase UPS

Vertiv will install and connect all Liebert® GXT5 UPS's and connect power within the PMC cabinet and output to the PDUs as described in the submittal documents.

Additionally, Vertiv will install ancillary equipment such as Maintenance bypass and PD2-103 cabling and connectors if not already preinstalled.

After the SmartRow2 is assembled and Primary Power to the SmartRow2 is provided by the customer, Vertiv will perform factory startup of all GXT5 equipment along with the rest of the SmartRow2.

Switch

Vertiv will install and connect the switch within the PMC cabinet. as described in the submittal documents.

Firmware Updates

Vertiv will update firmware of any/all units to the current revision level. Shippable units are sourced globally, and firmware evolves as products may be in stock with prior revisions.

Wiring

Vertiv will run all necessary wiring for power and communication between cabinets as part of assembly. This includes setting IP/DIP switch settings for proper communication between the device and the PMC.

Accessories

The SmartRow2 is available with lights, door locks/sensors, temperature sensors that Vertiv will connect and install. Services associated with cameras are sold separately and out-of-scope for the SmartRow2 Assembly

RDU Monitor SmartRow2 mobile application.

Services associated with the RDU Monitor SmartRow2 mobile applications are quoted separately and out-of-scope for SmartRow2 assembly.

Fire Suppression Cabinet Assembly (if Applicable)

Vertiv will unpackage the Fire Suppression cabinet so that it is ready for installation.

Position level and bolt together the Fire Suppression cabinet to the adjoining cabinets.

Ensure all the wirings are connected, according to the information available in the submittal documents.

Install the piping in all the other cabinets in accordance with system drawings.

CUSTOMER RESPONSIBILITIES

In order to provide timely, accurate and thorough execution of the services described herein, Vertiv requests the following:

- Point of Contact: Provide an authorized point of contact(s), specific for the scope of work, for scheduling and coordination purposes.
- Scheduling: Make dates available for scheduling service. All visits must be requested 4 weeks in advance for assembly and 10 days for startup/warranty-inspection of need by contacting the Vertiv Project Manager. Site must be available for 5 consecutive business days. Customer may choose to pay for premium time if weekend work is necessary.
- Site Access: Prior to time of scheduled work, provide site access including any customer required escort, security clearance, safety training and badging for Vertiv personnel.
- Equipment Access: Convenient access to the equipment covered by the Scope of Work. Prior to scheduled time of work, notify Vertiv personnel of any special requirements for equipment access including lifts, ladders, etc.
- Shutdown: Service may require shutdown of load to ensure electrical connection integrity.
- Notification: If for any reason the work cannot be performed during scheduled time, notify Vertiv personnel 24-hours prior to scheduled event.
- Provide Method of Procedure (MOP) requirements/ templates, and required review period(s)

ASSUMPTIONS AND CLARIFICATIONS

- Vertiv will cover one month of storage costs as part of the consolidation service. If the original ship date is changed due to non-Vertiv delays, the customer is liable for any costs associated with the extended storage time.
- Vertiv start-up validates product warranty.
- Defects or damage resulting from installation not performed by Vertiv are not covered.
- Parts and Labor coverage is in accordance with Product Warranty. If a modified warranty is purchased, terms default to that specific package.
- Any customer site visit is limited to eight (8) hours per visit. Any time beyond forty (40) hours/wk or eight (8) hrs/day or additional Startup visits will be billed separately.
- Expenses incurred due to delays that are beyond the control of Vertiv may be billed at cost.
- Startup visit must be scheduled confirmation of proper installation (if Vertiv not involved with installation).
- This pricing excludes any load bank testing. This can also be quoted separately if required.
- Pricing excludes activities associated with 3rd party commissioning.
- Pricing excludes any type of circuit breaker NEMA testing. This can also be quoted separately if required.
- Customer/Installing contractor is responsible for providing elevated access as necessary.
- Any additional requests beyond the scope of this document will be billed separately by Vertiv.
- Vertiv will not perform physical changes to the site building (such as drilling holes, etc.)

TERMS AND CONDITIONS

Subject to all Terms & Conditions as noted in the Vertiv Terms & Conditions or the terms of a Master Agreement between the parties, if any, shall apply.

SCOPE OF WORK

SMART ROW 2 – FIRE SUPPRESSION

START-UP & OPTIONAL SERVICES

SERVICE SUMMARY

Feature	Detail
On-site Service	One site trip within the 48 contiguous states to start-up the system. Visit to be scheduled by the customer between 8am-5pm, Monday-Friday (excluding national holidays).
Service Professional	Performed by Vertiv factory-trained and authorized technician equipped with Vertiv Proprietary tools and software. Vertiv CEs and Vertiv Partners are the only approved OEM service providers for Vertiv products.
Permitting	Permits are the responsibility of the customer to see if one is required. Additional fees may apply and can vary based on the customer's location. (see Assumptions and Clarifications).
Optional services	Optional system integrity services can be requested by the customer as part of the startup and installation.

SERVICE PERFORMED

Fire Suppression Start-up:

1. Verify that 120V AC circuit has been ran to the fire suppression panel.
2. Verify all the items on the Fire Suppression readiness punch list have been completed and acknowledged.
3. Functionality test all input and output circuits for proper operation.
4. Complete the warranty inspection of the system.
5. Provide training to the customer on the operation of the Fire Suppression system.

Door Fan Test (if applicable):

1. Conduct a door fan test with the standardized Fan test system.
2. Measure the pressure retention rate and calculate the amount of air flowing through the Door fan.
3. Determine the total size of the air leaks (if any).
4. Provide the customer with the pressure test report.

Discharge Test (if applicable):

1. Replace the system cylinder with the Proinert test cylinder provided by the manufacturer.
2. Conduct a discharge test on the system.
3. Ensure that the oxygen level falls below 15% and maintains that level for a minimum of 10 minutes.
4. Place the system cylinder back into place and arm the system.
5. Provide the customer with a discharge test report.

CUSTOMER RESPONSIBILITIES

In order to provide timely, accurate and thorough execution of the services described herein, Vertiv requests the following:

- Point of Contact: Provide an authorized point of contact(s), specific for the scope of work, for scheduling and coordination purposes.
- Scheduling: Make dates available for scheduling service. All visits must be requested 10 business days in advance of need by contacting the Vertiv Customer Resolution Center at 1-800-543-2378.
- Site Access: Prior to time of scheduled work, provide site access including any customer required escort, security clearance, safety training and badging for Vertiv service personnel.
- Equipment Access: Convenient access to the equipment covered by the Scope of Work. Prior to scheduled time of work, notify Vertiv service personnel of any special requirements for equipment access including lifts, ladders, etc.
- Shutdown: Service may require shutdown of load to ensure electrical connection integrity.
- Notification: If for any reason the work cannot be performed during scheduled time, notify Vertiv service personnel 24-hours prior to scheduled event.

ASSUMPTIONS AND CLARIFICATIONS

- Assembly: The assembly of the Fire Suppression cabinet is included in the SmartRow2.
- Punch list: This document confirms system readiness and must be completed before startup. It is included in the submittal package.
- Permitting: The customer is responsible for any permits (if required), as it falls outside the original scope. While the process can be facilitated, the customer will be responsible for all permitting costs, including any optional services listed above.
- Maintenance: Per NFPA 2001, the FIKE Proinert IG-55 SHP Pro suppression system protecting the SmartRow2 shall be inspected on a semi-annual basis. These inspections are not only important in ensuring the included clean agent system is functionally operational but are necessary to qualify for any manufacturer warranties. Per the manufacturer's warranty guidelines, the equipment must be maintained on a semi-annual frequency by an authorized FIKE distributor commencing with the date of Startup.
- Optional Integrity testing: Manufacturer intends to provide both the integrity test services (Door fan test and Discharge test) at the customer's facility either directly or through a local Fike distributor. This pricing includes the necessary labor, equipment, and materials to complete this testing.
- Manufacturer does not guarantee a passing test after the system has been handed over to the customer and is not responsible for the patching and sealing of the enclosure if the cable and CRV penetrations have not been sealed.

TERMS AND CONDITIONS

Subject to all Terms & Conditions as noted in the Vertiv Terms & Conditions or the terms of a Master Agreement between the parties, if any, shall apply.



SmartRow 2

Scope of Work Checklist

Customer Name:

Project Name:

Project Number:

This document is to serve as a checklist to help identify and budget the various work activities involved with assembling and installing a SmartRow 2. It is the customers responsibility to ensure all tasks are assigned to partners which will result in a successful SmartRow 2 project.

Contact Vertiv for available local support resources to provide technical guidance as needed. Call 800 543-2378

The **X** indicates the responsible party for that task. Multiple **X**'s indicate shared responsibility.

This document is provided as a reference document and does not replace any product manuals or supporting documentation. Always read all product documentation before performing any work.

Customer (Name) *includes responsibility for Mechanical, Electrical, and/or General Contractors as needed :*

Project Management:

Assembly Team Lead:

Consolidator:

Vertiv Warranty Inspection Tech:

Vertiv Sales Rep (LVO):

	Customer	Local Vertiv Sales Rep	Project Management	Assembly Team	Consolidator / Inside Delivery	Flagship/FIKE Rep	Vertiv Warranty Inspection Tech	Tasks
1	Pre-Sale Activities							
1,01	X	X	☐	☐	☐	☐	☐	Perform / arrange Site Visit to qualify deployment. Add any incremental site-specific Tasks in Section 6 of this checklist.
1,02	X	X	☐	☐	☐	☐	☐	Assess whether the building has enough power available to support the SmartRow 2 and heat rejection.
1,03	X	X	☐	☐	☐	☐	☐	Advise if a floor loading analysis should be conducted.
1,04	☐	X	☐	☐	☐	☐	☐	Ensure the customer understands and adheres to the minimum and maximum SmartRow 2 heat load and rack density limits.
1,05	X	X	☐	☐	☐	☐	☐	Assess if a crane will be required to locate the heat rejection on a roof and plan accordingly.
1,06	X	X	☐	☐	☐	☐	☐	If a freight elevator will be used, confirm adequate lifting capacity and dimensional clearances (PMC cabinet is typically the heaviest piece of equipment at 1998mm height, 1400mm depth, 600mm width and up to 1,600 lb weight.)
2	Post Sale, Equipment Pre-Delivery Activities							
2,01	☐	X	☐	☐	☐	☐	☐	Ensure every task in this Trade SOW Guide is assigned to at least one responsible party (Marked by X). This guide is specific to the SmartRow 2.
2,02	☐	X	☐	☐	☐	☐	☐	Send a completed copy of this document to all involved parties.
2,03	☐	X	X	☐	☐	☐	☐	Ensure all trades receive a current and accurate manual and set of submittals.
2,04	☐	X	☐	☐	☐	☐	☐	Acknowledge all tasks listed in the Trade SOW Checklist are completed by all the responsible parties.
2,05	X	X	☐	☐	☐	☐	☐	Verify whether permits are necessary for the installation of the Fire Suppression System.
2,06	X	X	X	☐	☐	☐	☐	Asses whether the customer requires any onsite system integrity tests as part of the Fire suppression System Startup activity.
2,07	X	X	☐	☐	☐	☐	☐	Complete SmartRow 2 Delivery Service (Inside Delivery) checklist and return to factory within 10 days of PO receipt (Document MBFM 7160-10 in submittal packet).
2,08	X	X	☐	☐	☐	☐	☐	Ensure indoor space meets all SmartRow 2 requirements (see SmartRow 2 manual); identify any issues and resolve: ⁽¹⁾ Floor surface must be level and continuous (expansion joints sealed, raised floor tile gaps sealed, no floor drains, etc). ⁽²⁾ Mezzanine/roof can support outdoor heat rejection (if applicable) ⁽³⁾ Adequate service, egress and electrical clearances (see submittal packet) ⁽⁴⁾ Room containing SmartRow 2 maintained year-round within 0°C – 40°C. ⁽⁵⁾ The room and floor must be clean and free of debris. ⁽⁶⁾ Ensure there is at least 24 inches clearance above the rack top plates ⁽⁷⁾ Ensure no part of the SmartRow 2 will be closer than 18 inches to a sprinkler head (per NFPA 13)
2,09	X	X	☐	☐	☐	☐	☐	Make sure condenser is within 300 equivalent feet (see cooling equipment manuals for calculation guidance).Outdoor Condenser Installation. Follow Installer/User Guide. ⁽¹⁾ Condenser is bolted, mounted and leveled ⁽²⁾ Provide and install (2) low voltage twisted pair wires between each indoor cooling unit and outdoor heat rejection (condenser / drycooler) for CANbus communication and dry contact closure. ⁽³⁾ This includes qty (3) vacuum pulls of the refrigerant lines (oil must be changed in the vacuum pump between each pull, and readings should be 250 microns or less. Provide picture with date/time to confirm) ⁽⁴⁾ Refrigerant lines charged with freon ⁽⁵⁾ The outdoor piping are wrapped in aluminum and braced
2,10	X	X	☐	☐	☐	X	X	Confirm that the nearest drain for condensate is within the cooling unit's pump head limitations (see cooling equipment manuals).
2,11	X	X	☐	☐	☐	☐	☐	Provide and install utility over-current protection and circuit for each outdoor condenser/drycooler when applicable.
2,12	X	X	☐	☐	☐	☐	☐	Provide and install utility over-current protection and circuit for main input row connection in PMC.
2,13	X	X	X	☐	☐	☐	☐	Schedule delivery. If new construction, installation is recommended before office furniture is installed but after building construction is completed. Permanent, continuous power must be available.
2,14	☐	X	X	☐	☐	☐	☐	Schedule Vertiv Cooling System Warranty Inspection.
2,15	☐	X	X	☐	☐	☐	☐	Schedule Vertiv UPS System Warranty Inspection.

3	SmartRow 2 Assembly							
3,01	☐	☐	☐	☐	X	☐	☐	Receive shipment(s).
3,02	☐	☐	☐	☐	X	☐	☐	Bring equipment from truck into room, unpackage and remove debris (included with SmartRow 2 Delivery Service).
3,03	☐	☐	☐	☐	X	☐	☐	Review equipment for shipping damage (recommended the same party who receives the equipment).
3,04	☐	☐	☐	X	☐	☐	☐	Assemble, gasket and level PMC unit per submittal package.
3,05	☐	☐	☐	X	☐	☐	☐	Assemble, gasket and level indoor cooling unit(s) per submittal package.
3,06	☐	☐	☐	X	☐	☐	☐	Assemble, gasket and level racks per submittal package.
3,07	☐	☐	☐	X	☐	☐	☐	Assemble and attach rubber cable grommets.
3,08	☐	☐	☐	X	☐	☐	☐	Connect door switch wire and rack lighting wire harnesses.
3,09	☐	☐	☐	X	☐	☐	☐	Install cable troughs on top of equipment.
3,10	☐	☐	☐	X	☐	☐	☐	Neatly connect and route CANbus communication cables and address rack temperature 2T-sensors (set dip switches).
3,11	☐	☐	☐	X	☐	☐	☐	Neatly route the rack temperature 2T temperature probes into position in front of EIA rails.
3,12	☐	☐	☐	X	☐	☐	☐	Neatly route and connect all Ethernet cables between SmartRow 2 Network vNSA switch, and all UPS and cooling unit Unity monitoring cards, primary rack-PDU RPC2 monitoring cards, and cooling unit teamwork connections.
3,13	☐	☐	☐	X	☐	☐	☐	Neatly route and connect all rack-PDU array Ethernet cables.
4	SmartRow 2 Installation including the Fire Suppression System							
4,01	☐	☐	☐	X	☐	☐	☐	Install PMC to MBC (20KVA) or PMC to UPS (10KVA) interconnect cabling (cables provided with SmartRow 2)
4,02	☐	☐	☐	X	☐	☐	☐	Install UPS to MBC (20KVA) interconnect cabling (cables provided with SmartRow 2) or Mount POD (Included in SmartRow 2) on UPS (10KVA).
4,03	☐	☐	☐	☐	☐	☐	X	Connect low voltage wires to indoor cooling unit and outdoor heat rejection.
4,04	X	☐	☐	☐	☐	☐	☐	Provide and connect condensate drain line to each indoor cooling unit.
4,05	X	☐	☐	☐	☐	☐	☐	Connect utility high voltage building feed to main input in PMC.
4,06	X	☐	X	☐	☐	☐	☐	Ensure the handover document is completed and acknowledged by all responsible parties if startup activities are scheduled at different times.
5	SmartRow 2 Startup							
5,01	☐	☐	☐	X	☐	☐	☐	Ensure all rubber cable grommets are installed
5,02	☐	☐	☐	☐	☐	☐	X	Cooling system Warranty Inspection.
5,03	☐	☐	☐	☐	☐	☐	X	UPS system Warranty Inspection.
5,04	☐	☐	☐	☐	☐	☐	X	Configure RDU501 Controller
5,05	☐	☐	☐	X	☐	☐	☐	Close breakers on rack-PDUs.
5,06	☐	☐	☐	X	☐	☐	☐	Perform final SmartRow 2 functional test (Door switches, backup fans, HMI).
5,07	☐	☐	☐	X	☐	☐	☐	Clean entire SmartRow 2, inside and outside. When cleaning see-through Plexiglas doors follow instructions in manual to avoid scratching.
5,08	☐	☐	☐	X	☐	☐	☐	Ensure the SmartRow 2 Startup Form has been completed.
6	Fire Suppression System Start up							
6,01	X	X	☐	X	☐	X	☐	Ensure all the required parties are present on site for the installation of the Fire Suppression System.
6,02	☐	☐	☐	X	☐	☐	☐	Position, level and bolt together the Fire suppression cabinet to the rest of the row.
6,03	☐	☐	☐	X	☐	☐	☐	Ensure all the wiring is connected, according to the information available in the submittals.
6,04	☐	☐	☐	X	☐	☐	☐	Install the piping in all the other cabinets.
6,05	X	X	☐	☐	☐	X	☐	Ensure the Punch list items are completed and signed by the responsible parties.
6,06	X	X	☐	☐	☐	X	☐	Review the closeout document with the information about the pre-test conducted at Flagship.
6,07	☐	☐	☐	☐	☐	X	☐	Validate the warranty of the Fire supression system.
6,08	☐	☐	☐	☐	☐	X	☐	Verify that all components are functioning as intended.
6,09	X	☐	☐	☐	☐	X	☐	Provide training to the customer on the system.
7	Optional - Fire Suppression System Integrity Test (upon customer request)							
7,01	☐	☐	☐	☐	☐	X	☐	Conduct a door fan test with the standardized Fan test system.
7,02	☐	☐	☐	☐	☐	X	☐	Measure the pressure retention rate and calculate the amount of air flowing through the Door fan.
7,03	☐	☐	☐	☐	☐	X	☐	Determine the total size of the air leaks.
7,04	☐	☐	☐	☐	☐	X	☐	Provide the customer with the pressure test report.
7,05	☐	☐	☐	☐	☐	X	☐	Replace the system cylinder with the Proinert test cylinder provided by the manufacturer.
7,06	☐	☐	☐	☐	☐	X	☐	Conduct a discharge test on the system.
7,07	☐	☐	☐	☐	☐	X	☐	Ensure that the oxygen level falls below 15% and maintains that level for a minimum of 10 minutes.
7,08	☐	☐	☐	☐	☐	X	☐	Place the system cylinder back into place and arm the system.
7,09	☐	☐	☐	☐	☐	X	☐	Provide the customer with a discharge test report.