Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

REAR VIEW

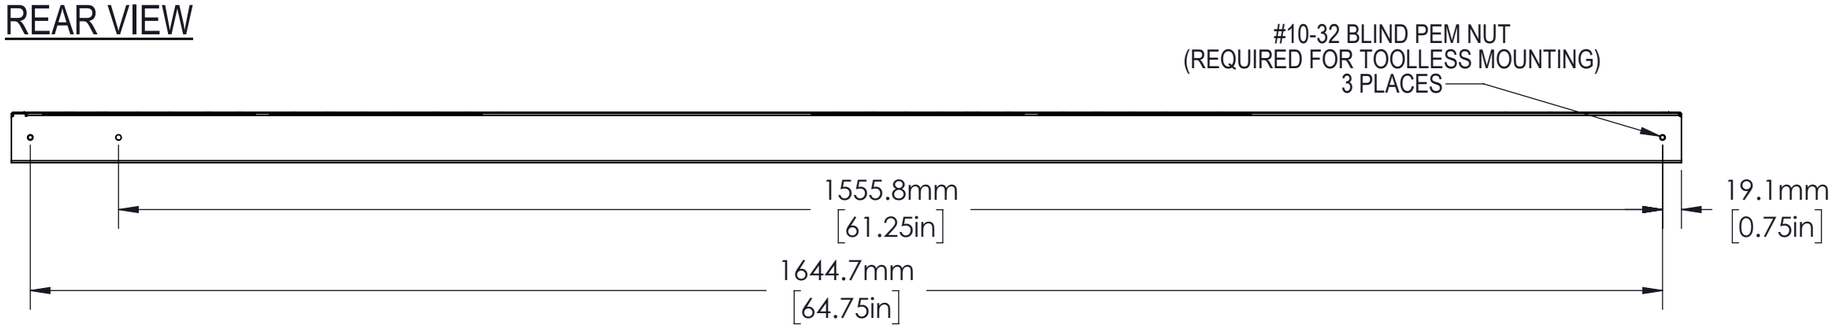

SIDE VIEW

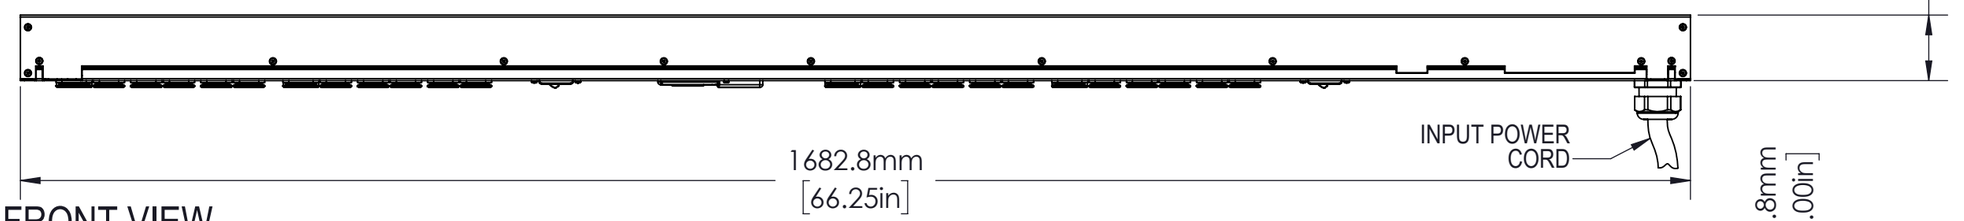

FRONT VIEW

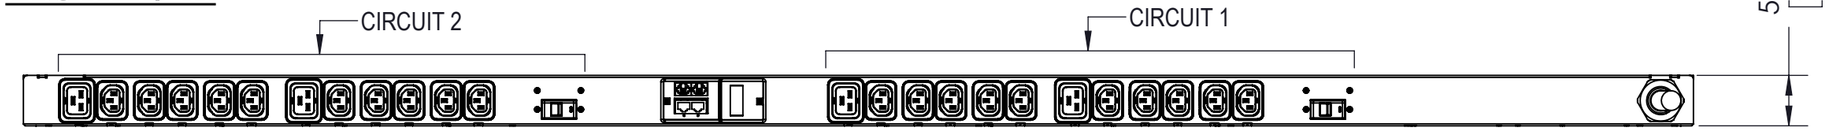

NEMA L6-30P
(30A, 2/PE, 200-240V)

OUTPUT POWER

CIRCUIT	PHASE	RECEPTACLE TYPE	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	L1-L2	10xC13, 2xC19	200-240	12/16	16
2	L1-L2	10xC13, 2xC19	200-240	12/16	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10 FT	NEMA L6-30P	2/PE	50/60 Hz	200-240V	30	24

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±2% - Circuit/Breaker Current

AGENCY COMPLIANCE:
UL & c-UL Listed 60950
RoHS Compliant
FCC Part 15 Class A Conformance

ENVIRONMENTAL RATING:
Maximum Operating Temperature: 60C / 140F

NOTES
UNIT DIMENSIONS: 66.25in x 2.0in x 2.6in / 1683mm x 51mm x 66mm
SHIPPED WEIGHT: 20lbs (9.07kg)
SHIPPING DIMENSIONS: 72in x 9in x 7in / 1829mm x 223mm x 159mm
Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm, and 7938 Vertical Mounting Bracket Kit

Rev.	Change	Date	Name
-	-	-	-

Dimensions in mm

Allgemeintoleranzen General tolerances	Oberfläche Finish	Werkstoff / Material	Gewicht: Weight:
-	-	-	-

	Date	Name
Drawn	22/06/18	SW
Checked	-	-
Approved	-	-

Bezeichnung / Description
Switched, Outlet Level, Vertical, 30A, 208V, (20)U-Lock C13/(4)U-Lock C19

VERTIV™

Zeichnungs-Nr. / Drawing no.
VP8641

Maßstab Scale
1:6

Verwendet in / Used in
-

Blatt/Sheet
1/1

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.