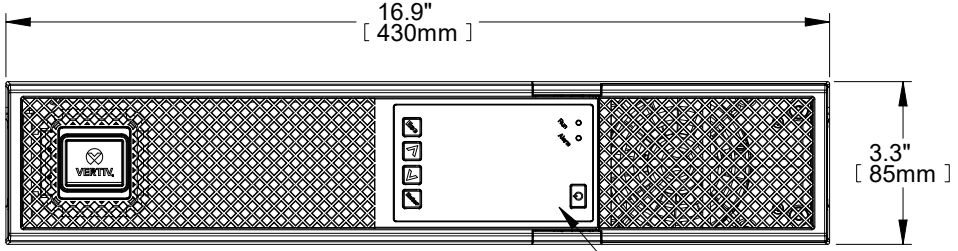

FOR DETAIL
SEE DRAWING GXT5-DISPLAY

FRONT VIEW

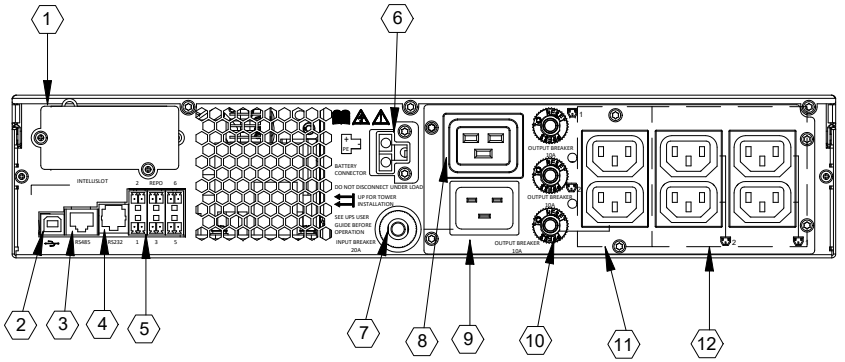

REAR VIEW

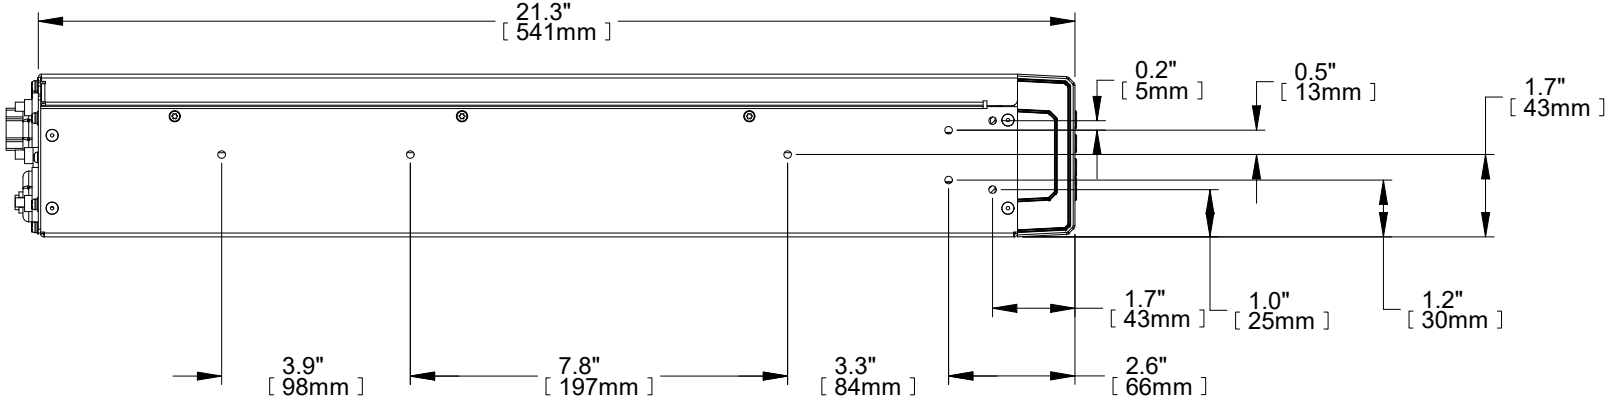

SIDE VIEW

1. INTELLISLOT PORT
2. USB PORT
3. RS485 PORT
4. RS232 PORT
5. TERMINAL BLOCK COMMUNICATION
6. EXTERNAL BATTERY CONNECTOR
7. 20A INPUT CIRCUIT BREAKER
8. NON-PROGRAMMABLE C19 OUTPUT RECEPTACLE
9. INPUT POWER PLUG AND CABLE C20
10. OUTPUT CIRCUIT BREAKER 10A
11. NON-PROGRAMMABLE C13 OUTPUT RECEPTACLES
12. PROGRAMMABLE C13 OUTPUT RECEPTACLES

NOTES:
1. UNIT DIMENSIONS (WxDxH): 16.9" x 21.3" x 3.3" (2U)
   (430mm) x (541mm) x (85mm)
2. UNIT WEIGHT: 62lbs (28.2kg)
3. SHIPPING DIMENSIONS (WxDxH): 22.4" x 28.2" x 10.3"
   (570mm) x (717m) x (262mm)
4. SHIPPING WEIGHT: 79.2lbs (36kg)
5. MINIMUM AIRFLOW CLEARANCE IS 4.0" (100mm)
   FRONT AND REAR.

DRAWN BY B. LAY	SHEET NO. 1 OF 1	OUTLINE DRAWING LIEBERT GXT5 3000VA ARGENTINA 230VAC RACK/TOWER UPS			
CHK BY L. JOHNSON	ECN NO.				
REF. DWG.	ORDER NO.		DWG. NO. GXT5-3000IA_OD	DATE 5/13/20	REV. # 0

1050 DEARBORN DRIVE
P.O. BOX 29186
COLUMBUS, OHIO 43229

VERTIV

FILE NAME: I:\dpgeng\GXT5\Submittals\(A)Outline Dwg\GXT5-3000IA_OD