

- 2 USB PORT
- (3) EXTERNAL BATTERY CABINET COMMUNICATION PORT (RS485)
- 4 RS232 PORT
- (5) TERMINAL BLOCK COMMUNICATION
- 6 REPO

- (8) 30A INPUT CIRCUIT BREAKER
- 9 GROUND SCREW
- (10) INPUT POWER PLUG (L14-30P, 3m/10ft)
- \langle 11angle 30A MAINTENANCE BYPASS CIRCUIT BREAKER
- (12) 30A OUTPUT CIRCUIT BREAKER
- (13) OUTPUT POWER RECECPTACLES (L14-30R x 2)

NOTES

- 1. UNIT DIMENSIONS (WxDxH) 430mm x 835mm x 85mm (2U) (16.9") x (32.9") x (3.3")
- 2. UNIT WEIGHT WITH EBC: 47.6kg (104.9lbs)
- 3. UNIT WEIGHT WITHOUT EBC: 25.6kg (56.4lbs)
- 4. SHIPPING DIMENSIONS (WxDxH) 798mm x 999mm x 532mm (31.4") x (39.3") x (20.9")
- 5. SHIPPING WEIGHT 80kg (176.3lbs)
- 6. MINIMUM AIRFLOW CLĚÁRANCE IS 100mm (4.0") FRONT AND REAR.

			,	 	
SHEET NO.	DRAWN BY:			DWG. NO.	
1 OF 1	AVINASH PATIL			GXT5LI_	5000MVRT3UXLN
CO. NO.	DESIGNED BY:			DATE (LATE	ST REV.)
-	P BENNER	TITLE OUTLINE DRAWING	3		29-JUL-22
REF DWG.	APPROVED BY:	LIEBERT GXT5 LITHIUM-ION	√ 5000VA	REVISION	1050 DEARBORN DR
-	N SECORD	120/208 VAC RACK/TOWE	R UPS	0	P.O. BOX 29186 COLUMBUS, OH 43229




В

Α

2

Α

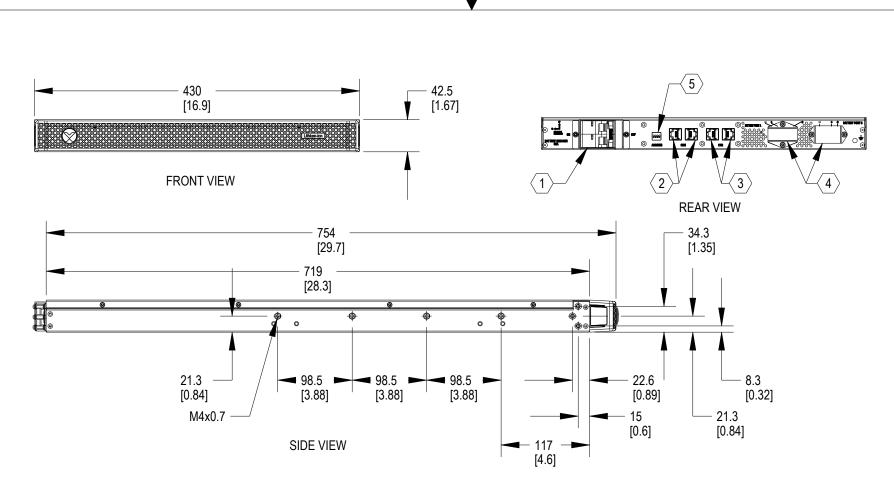

- 1 OUTPUT CIRCUIT BREAKER (63A)
- (2) EXTERNAL BATTERY CABINET COM PORTS
- \langle 3 \rangle EXTERNAL BATTERY CABINET CAN PORTS
- \langle 4 \rangle EXTERNAL BATTERY CABINET POWER CONNECTORS
- \langle 5 \rangle ADDRESS DIP SWITCH

NOTES

- 1. UNIT DIMENSIONS (WxDxH) 430mm x 754mm x 42.5mm (1U) (16.9") x (29.7") x (1.7")
- 2. UNIT WEIGHT: 22kg (48.5lbs)
- 3. SHIPPING DIMENSIONS (WxDxH) 800mm x 1000mm x 285mm 31.4" xx 39.3" x 11.2"
- 4. SHIPPING WEIGHT 48.5kg (106.9lbs)
- 5. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0") FRONT AND REAR.

SHEET NO.	DRAWN BY:		DWG. NO.	
1 OF 1	AVINASH PATIL		VEBCLI-192VRT1U	
CO. NO.	DESIGNED BY:		DATE (LATES	ST REV.)
-	P BENNER	OUTLINE DRAWING	10-AUG-22	
REF DWG.	APPROVED BY:	LIEBERT GXT5 LITHIUM-ION 5-10kVA	REVISION	1050 DEARBORN DR
-	N SECORD	192V EXTERNAL BATTERY CABINET	0	P.O. BOX 29186 COLUMBUS, OH 43229



В

2

1

Α

В