



FRONT VIEW

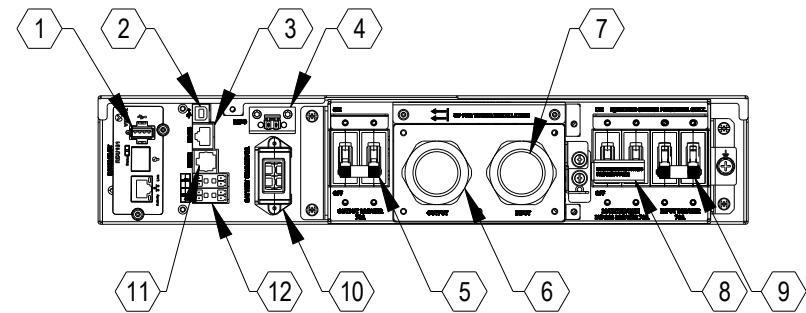

REAR VIEW

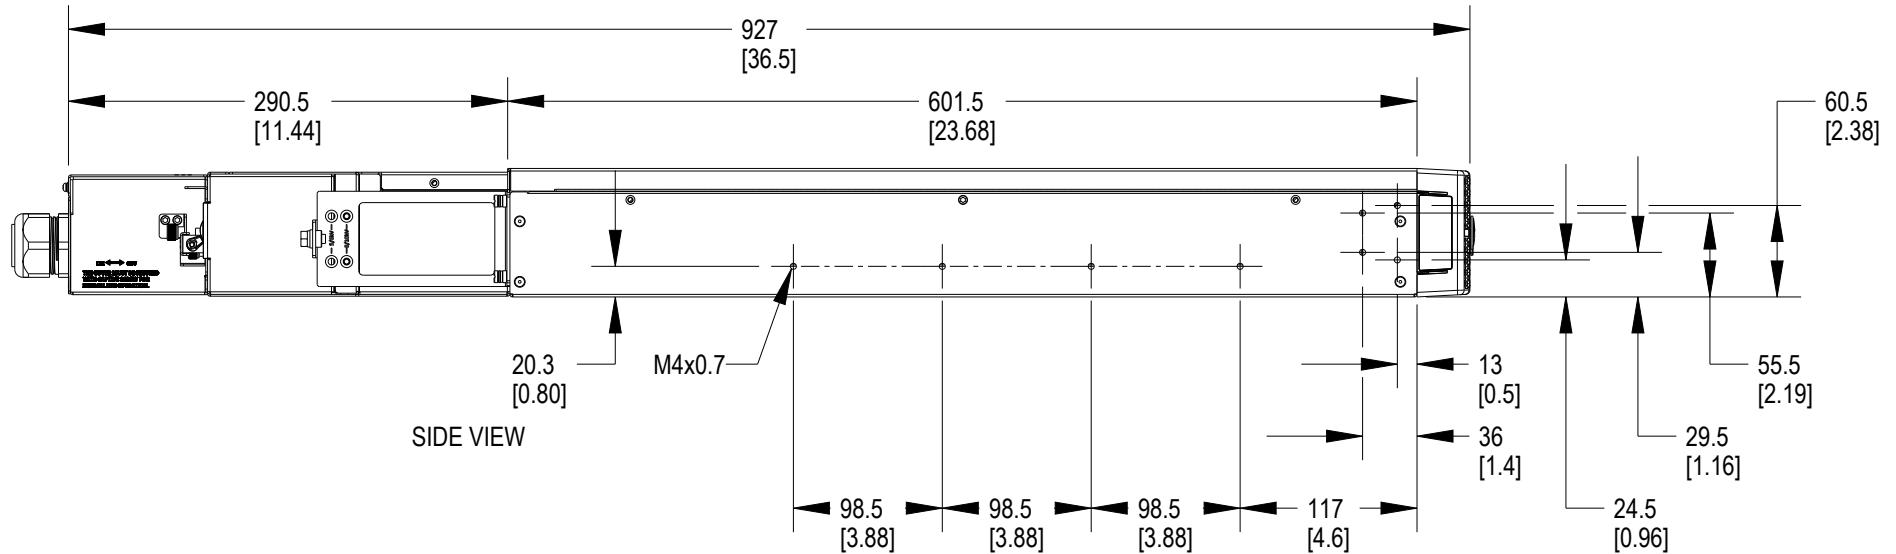

SIDE VIEW

- | | |
|---|---|
| 1 PREINSTALLED NETWORK CARD | 7 INPUT HARDWIRE CONNECTION |
| 2 USB PORT | 8 MAINTENANCE BYPASS CIRCUIT BREAKER |
| 3 EXTERNAL BATTERY CABINET (EBC) COMMUNICATION PORT (RS485) | 9 INPUT CIRCUIT BREAKER |
| 4 REPO CONNECTOR | 10 EBC CONNECTOR |
| 5 OUTPUT CIRCUIT BREAKER | 11 RS-232 PORT USED FOR (CLI) |
| 6 OUTPUT HARDWIRE CONNECTION | 12 DRY CONTACT COMMUNICATION TERMINAL BLOCK |

NOTES

- UNIT DIMENSIONS (WxDxH) 430mm x 890mm x 133mm (3U)
(16.9") x (35") x (5.25")
- UNIT WEIGHT WITH EBC: 48kg (105lbs)
- UNIT WEIGHT WITHOUT EBC: 26kg (57lbs)
- SHIPPING DIMENSIONS (WxDxH) 798mm x 998mm x 532mm
(31.4") x (39.3") x (20.9")
- SHIPPING WEIGHT 75kg (165lbs)
- MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0") FRONT AND REAR.

SHEET NO. 1 OF 1	DRAWN BY: ANIKET PATIL
CO. NO. -	DESIGNED BY: PETE BENNER
REF DWG. -	APPROVED BY: LUKE JOHNSON

TITLE

OUTLINE DRAWING
LIEBERT GXT5 LITHIUM-ION 10000VA
200/240 VAC RACK/TOWER UPS

DWG. NO. GXT5LI_10000GVRT
DATE (LATEST REV.) 24-APRIL-24
REVISION 0

505 N. CLEVELAND AVE
WESTERVILLE, OHIO
43082

