


FRONT VIEW

REAR VIEW

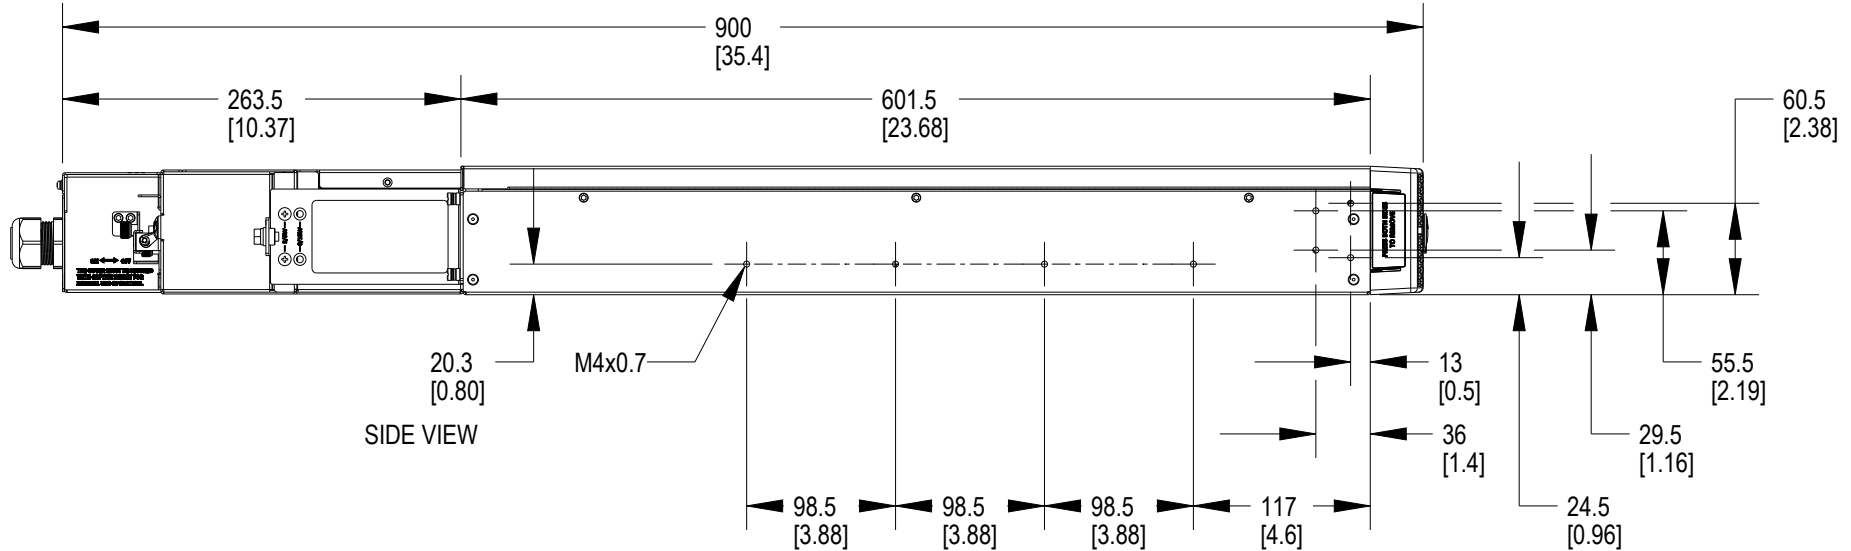

SIDE VIEW

- |   |   |
|---|---|
| 1 PREINSTALLED NETWORK CARD                                 | 7 INPUT HARDWIRE CONNECTION                 |
| 2 USB PORT  | 8 MAINTENANCE BYPASS CIRCUIT BREAKER        |
| 3 EXTERNAL BATTERY CABINET (EBC) COMMUNICATION PORT (RS485) | 9 INPUT CIRCUIT BREAKER                     |
| 4 REPO CONNECTOR  | 10 EBC CONNECTOR                            |
| 5 OUTPUT CIRCUIT BREAKER                                    | 11 RS-232 PORT USED FOR (CLI)               |
| 6 OUTPUT HARDWIRE CONNECTION                                | 12 DRY CONTACT COMMUNICATION TERMINAL BLOCK |

## NOTES

- UNIT DIMENSIONS (WxDxH) 430mm x 890mm x 133mm (3U)  
(16.9") x (35") x (5.25")
- UNIT WEIGHT WITH EBC: 45kg (99lbs)
- UNIT WEIGHT WITHOUT EBC: 23kg (51lbs)
- SHIPPING DIMENSIONS (WxDxH) 798mm x 998mm x 532mm  
(31.4") x (39.3") x (20.9")
- SHIPPING WEIGHT 72kg (159lbs)
- MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0") FRONT AND REAR.

SHEET NO. 1 OF 1	DRAWN BY: RINU TOMS
CO. NO. -	DESIGNED BY: PETE BENNER
REF DWG. -	APPROVED BY: LUKE JOHNSON

TITLE

OUTLINE DRAWING  
LIEBERT GXT5 LITHIUM-ION 6000VA  
200/240 VAC RACK/TOWER UPS

DWG. NO. GXT5LL_6000GVRT	DATE (LATEST REV.) 24-APRIL-24
REVISION 0	505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082

