




Vertiv™ Powerbar iMPB Quick Ship Program (QSP) Summary

5-6 Weeks!

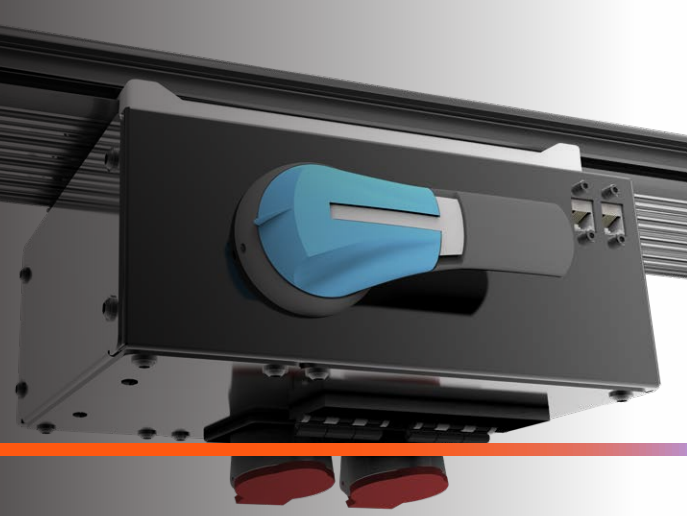

The Vertiv™ Powerbar iMPB Quick Ship Program (QSP) is designed to improve customer service by providing Busbar, Cable End Feeds and Tap Off Boxes in 5-6 weeks.

It will also help convert designs from traditional cable whip feeds to iMPB open track busduct. Customers can order entire busway installations or just TOB's for customers who are adding onto existing iMPB installations.

Leadtime and Capacity

This is the initial rollout of the program. The goal is to increase the scope and project size. The order size and scope is limited. Overall order capacity is limited by material inventory. If demand does surpass plant capacity the lead times may increase by weeks. Demand will be closely monitored.

Scope

- Busbar – 400A, 4 bar, housing ground with 100% neutral
 - Horizontal or vertical mounting
- Cable End Feed - 400A, 4 bar
- TOB - SQD QO CB's 22 KAIC, 4 bar, Receptacle only - NO Drop Cord or metering
 - Options
 - 20, 30A CB
 - 1,2,3 pole CB
 - Qty CB per TOB 1,2,3

If you have any questions about the program, please contact:

Tom McMullen

Tom.McMullen@vertiv.com

US E&I Commercial Integration Leader

Sam Johnson

Sam.Johnson@vertiv.com

Integration Lead

Please contact your local Vertiv Sales Office

<https://www.vertiv.com/en-us/contacts/sal>