Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

REAR VIEW

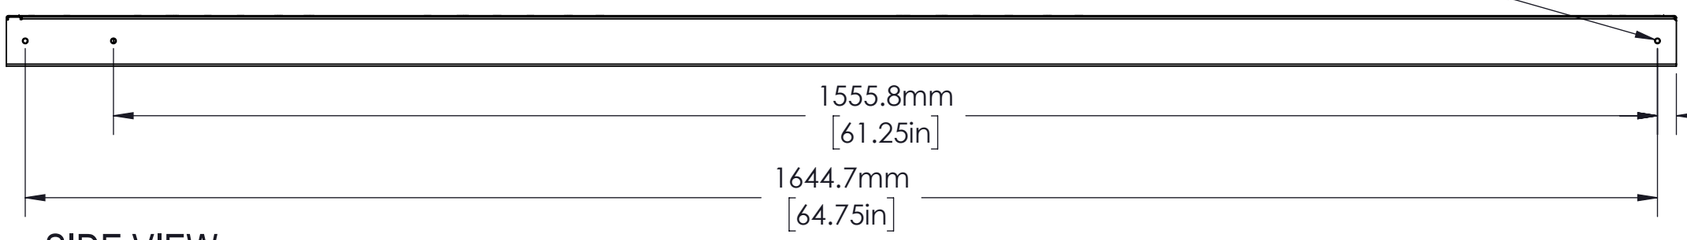

SIDE VIEW

FRONT VIEW

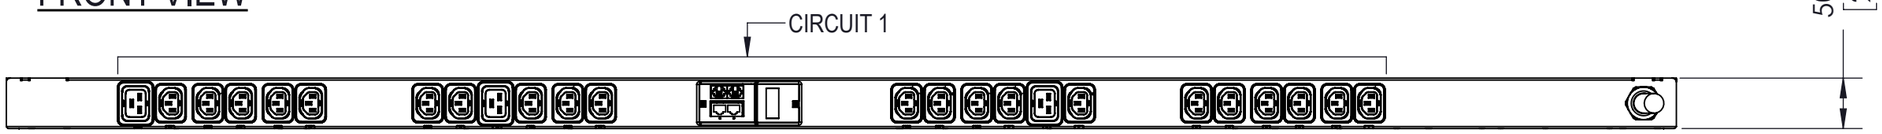

NEMA L6-20P
(20A, 2/PE, 200-240V)

OUTPUT POWER

CIRCUIT	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	L1-L2	21xC13, 3xC19	200-240	12/16	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10 FT	NEMA L6-20P	2/PE	50/60 Hz	200-240V	20	16

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±2% - Circuit/Breaker Current

AGENCY COMPLIANCE:
UL & c-UL Listed 60950
RoHS Compliant
FCC Part 15 Class A Conformance

ENVIRONMENTAL RATING:
Maximum Operating Temperature: 60C / 140F

NOTES
UNIT DIMENSIONS: 66.25in x 2.0in x 2.6in / 1683mm x 51mm x 66mm
SHIPPED WEIGHT: 18lbs (8.16kg)
SHIPPING DIMENSIONS: 72in x 9in x 7in / 1829mm x 223mm x 159mm
Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm, and 7938 Vertical Mounting Bracket Kit

Dimensions in mm

Rev.	Change	Date	Name
-	-	-	-

Allgemeintoleranzen
General tolerances
-

Oberfläche
Finish
-

	Date	Name
Drawn	26/06/18	SW
Checked	-	-
Approved	-	-

Werkstoff / Material
-

Gewicht:
Weight: -

Bezeichnung / Description
Switched, Unit Level, Vertical, 20A, 208V, (21)U-Lock C13/(3) U-Lock C19

Zeichnungs-Nr. / Drawing no.
VP8959NA3

Maßstab
Scale
1:6

Verwendet in / Used in
-

Blatt/Sheet
1/1

VERTIV™