

Avocent® AutoView™ Switch for Dell



Quick Installation Guide

This guide provides instructions for installing the Avocent AutoView switch for Dell. The figure included in this guide contains number callouts that correspond to the appropriate procedural step.

NOTE: A patch panel is not recommended as a connection point between the appliance and an IQ module because it can cause distance, power or video quality control feature issues. If the issues are still present when the patch panel is removed, contact Technical Support.

1. Connecting your peripherals

Connect your VGA monitor and USB keyboard and mouse cables and/or LCD Tray to the Avocent AutoView switch for Dell.

2. Connecting to a Vertiv™ Avocent® MPUIQ or an Integrated Access Cable (IAC) module

Connect a user-supplied CAT5 cable to the switch. Connect the other end to the module.

3. Connecting the Avocent MPUIQ or IAC module to a target device

Connect the video and either PS/2 or USB cable of the module to the target device. Repeat steps 2 and 3 for all target devices you want to connect.

4. Connecting to the network


Connect network and remote users by connecting a user-supplied CAT5 cable from the Ethernet network to the LAN port on the switch. (Remote KVM sessions require the purchase and use of a Remote Access Key.)

5. Connecting to Virtual Media or CACs (Avocent MPUIQ only)

(Optional) Connect the local Virtual Media (VM) reader, Common Access Card (CAC) reader and Remote Access Key to the USB ports on the switch.

6. Connecting to power

Turn on each target device, then locate the jumper cord(s) that came with the switch. Connect one end to the switch and connect the other end to a power source.

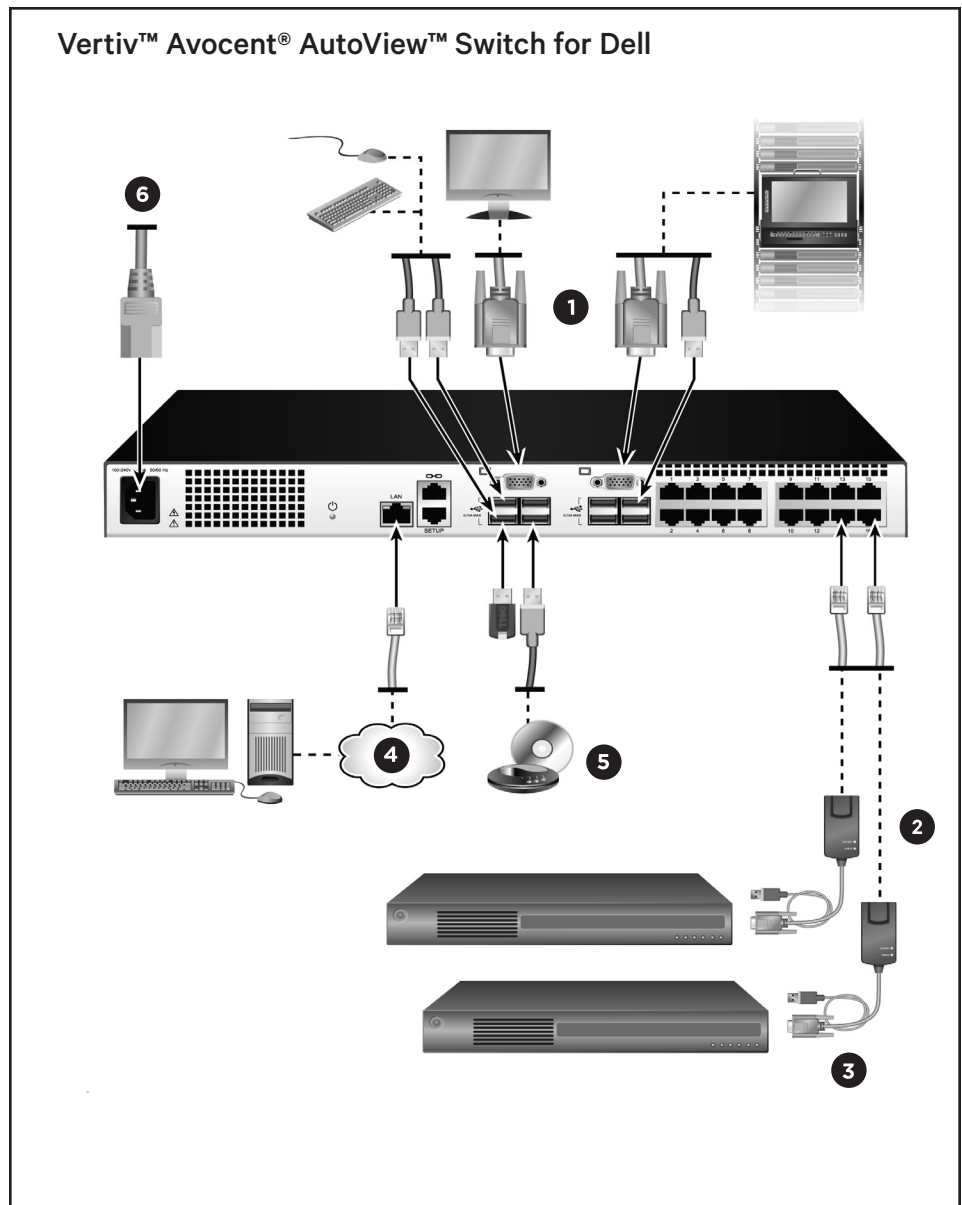



To contact Vertiv Technical Support: visit www.Vertiv.com

© 2025 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions.

