

Avocent® ADX IPUHD 4K IP KVM Device



Quick Installation Guide

1. Powering the Vertiv™ Avocent® ADX IPUHD 4K IP KVM device

Use a CAT 5e or CAT 6 cable to connect the LAN 1 (PoE) port of the IPUHD to one of the PoE ports on the Vertiv™ Avocent® ADX RM1048P Rack Manager.

The power LED blinks red when power is applied then turns solid red or green to indicate it is ready for operation.

NOTE: The IPUHD must be powered using a PoE port connected to LAN 1. LAN 2 is not a PoE port and cannot be used to power the unit.

The DC power port is reserved for future use and cannot be used at this time.

2. Connecting to the managed device

Use the provided USB-C cable to connect the USB-C port of the IPUHD directly to the managed device. If the device has no available USB-C port with DisplayPort alternative mode support, or if the USB-C port is unavailable, install a Vertiv™ Avocent® ADX 4K IP KVM adapter with the appropriate video port cable connection to the device. Connect the USB-C cable from the IPUHD to the adapter's USB-C port.


NOTE: Avocent ADX 4K IP KVM adapter video cable connection options for DP, HDMI and MiniDP are available. Each adapter has a single USB Type A cable for keyboard/mouse control.

3. Connecting to a device's service processor (optional)

Connect the LAN 2 port of the IPUHD to the network port on the service processor.

4. Connecting to a serial device (optional)

Use a Micro USB cable to connect the IPUHD to a serial device, or a USB-to-serial converter, to manage the host.

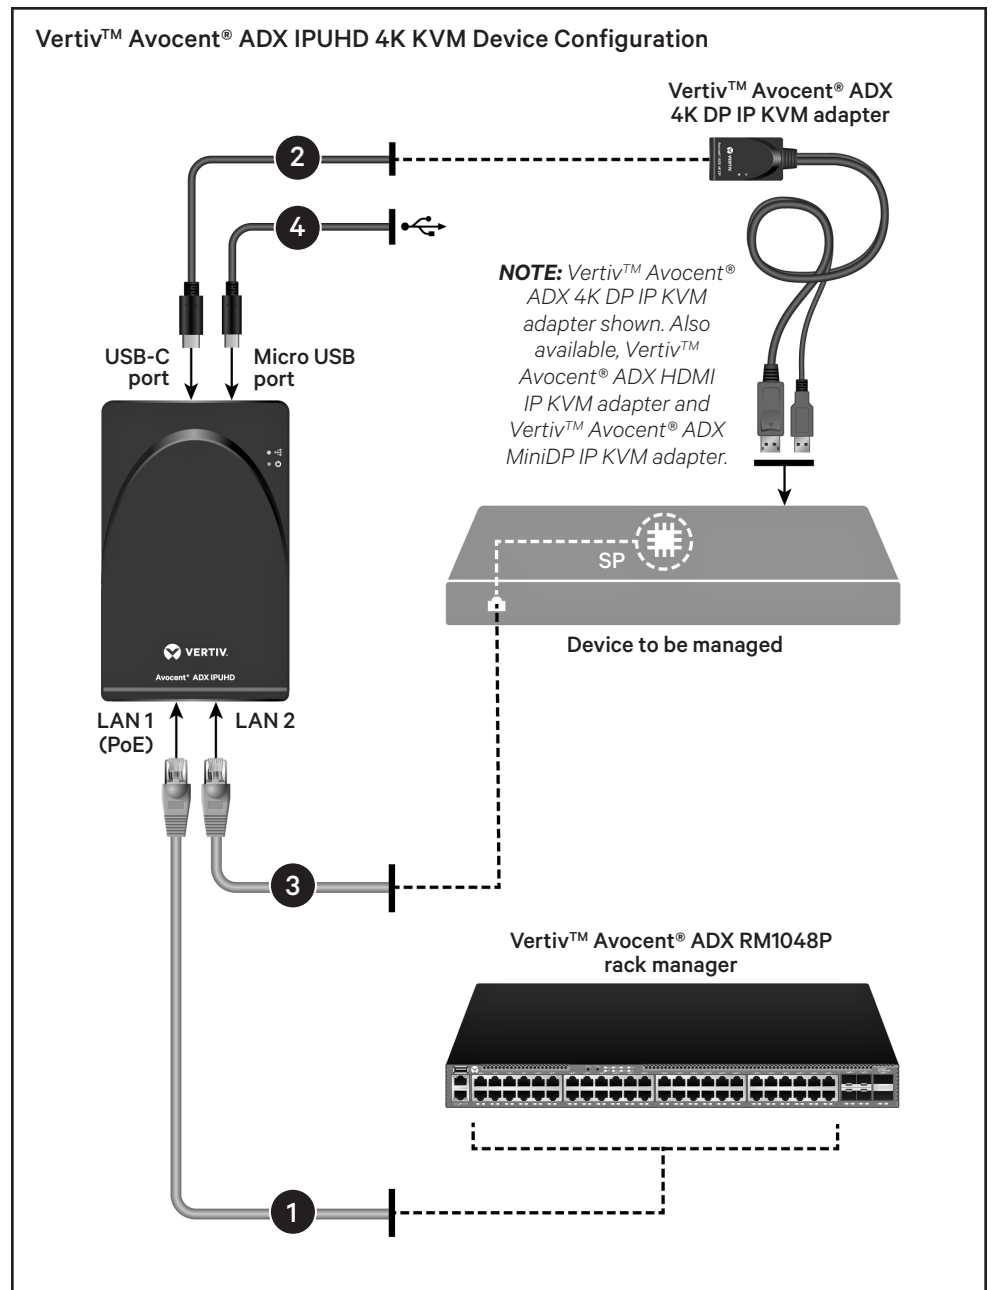



Hay disponible la versión traducida de este documento en www.vertiv.com/ADX-4K-IP-UHD-KVM.

To contact Vertiv Technical Support: visit www.Vertiv.com

© 2021 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.

