

# LIEBERT® IS-WEBRT3N™ CARD

## SNMPv3 Set-Up Guide



### 1. Configuring SNMPv3 on the Liebert® IS-WEBRT3N™ card

- Log in to the web interface of the Liebert® IS-WEBRT3N™ card.
- From the sidebar of the interface, click *Configuration*, then click *SNMP*.

### 2. Configuring SNMPv3 access on the card

- Click the *Access Control* tab at the top of the page.
- Enter the IP address you want to use for SNMPv3 or select an IP address from the *Manager IP Address* column.
- Under the *Version* column, use the drop-down menu to select *V3* next to the IP address you are using.
- Click the double carrots (>>) to display the *SNMP Version all&v3 Settings* page. Enter the desired settings and click *Apply*.


**NOTE:** You will need to contact your IT department for your SNMPv3 settings.

- From the *Permissions* column, select *Read Only* or *Read/Write Access*.
- Click *Apply*.

### 3. Configuring SNMPv3 traps

- Click *Trap Notification* at the top of the page.
- Enter the IP address you want to use or select an IP address from the *Destination IP* column.
- From the *Accept* column, use the drop-down menu to select the kind of trap you want to receive.

Liebert® IS-WEBRT3N™ Card

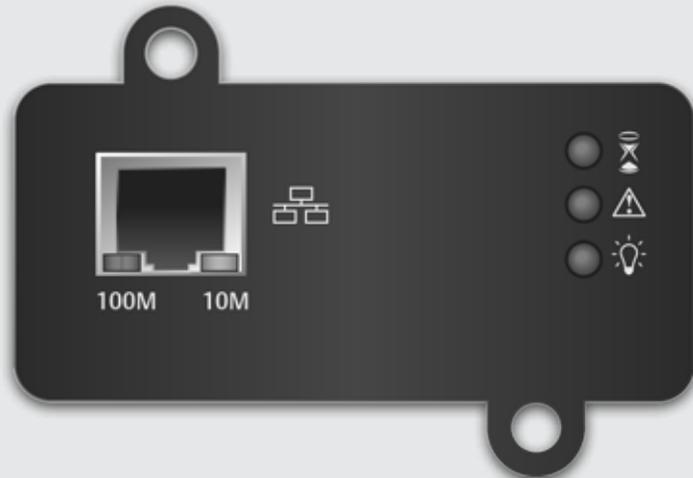

**NOTE:** *Inform* is a trap that receives acknowledgement from the monitoring application that has received the trap. A *Trap* is just sent with no acknowledgement received from the application.

- Click the double carrots (>>) to display the *SNMP3 Trap Settings* page. Enter the desired settings and click *Apply*.

**NOTE:** You will need to contact your IT department for your SNMPv3 settings.

- From the *Trap Type* column, use the drop-down menu to choose the type *Trap Standard* you want to use.
- From the *Severity* column, choose the alarm notification level.
  - Information sends all traps.
  - Warning sends warnings and sever traps.
  - Severe sends just severe traps.

- You may configure specifically which events you want to receive traps for by clicking *Select* from the *Events* column and then choosing *Yes* or *No*.

**NOTE:** All events are set to *Yes* by default.



**To contact Vertiv Technical Support: visit [www.VertivCo.com](http://www.VertivCo.com)**

© 2018 Vertiv Co. All rights reserved. Vertiv and the Vertiv logo are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.

