

Avocent® HMX 5000/6000/8000



IP-Based High Performance KVM

Features

- Less than a second switching between target computers
- Any-to-Any Matrix configuration
- Multicast 1:1 pixel mapping with instant video transmission
- IP based technology eliminates distance limitations of the past
- USB 2.0 compatibility enables most tablets, shuttle and joy sticks (reference the USB6000 for non supported USB requirements)
- Fully redundant system with auto failover
- Zero-U transmitters require no rack space or power
- Remote access capability
- Single CATx cable or fiber


The Avocent HMX 5000/6000/8000 IP-Based KVM provides the highest quality video with fast switching capabilities. With resolution up to 4K 60Hz, the Avocent HMX high performance KVM systems are the leader in the industry.

The Avocent HMX series is the preferred solution for broadcasting, sports venues, post production and many other industries where high resolution and zero latency are required. Furthermore, because they are IP-based, they provide flexibility in locating critical computing hardware in a secure and temperature-controlled environment away from the user work station, while maintaining a flawless desktop experience.

The Avocent HMX5000 provides video resolution up to **1920 x 1200 @60Hz** and offers a zero-U transmitter option for VGA, DVI-D or DP.

The Avocent HMX6000 provides video resolution up to **2560 x 1600 @60Hz**.

The Avocent HMX8000 offers **4K video** over a single 10Gb fiber connection, along with audio and USB.

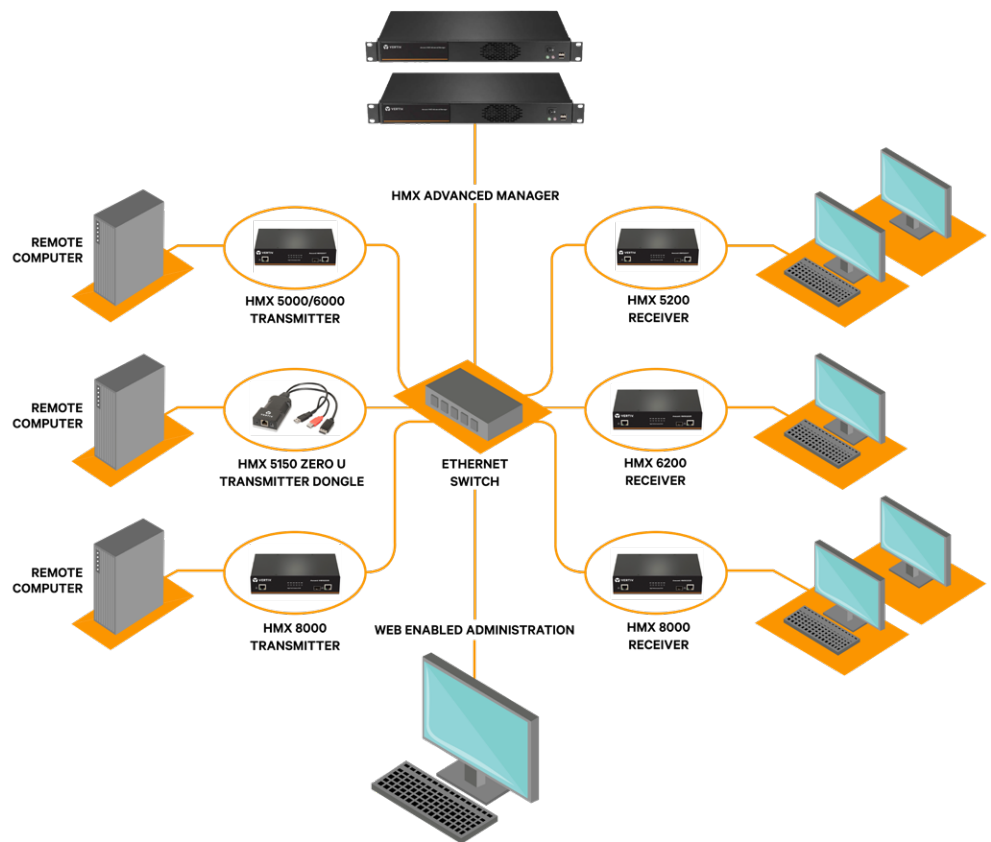

Technical Specification

	HMX 8000	HMX 5000/6000
Transmitter (TX)	2 x DisplayPort™, 2 x USB type B 2 x 3.5mm audio jack 1 x DB9 port Ethernet: 2 RJ45 2x SFP+ cages (MM or SM Fiber support)	1 x DVI-D (5100's) 1 X VGA, DVI-D, DP (5150) 2 x DVID (5200's and 6200's) 1 x USB type B 2 x 3.5mm audio jack 1 X DB9 port Ethernet: 2 x RJ45 (VNC access on the 6210T) 1 x SFP cage (MM/SM Fiber or Copper)
Receiver (RX)	2x DisplayPort™, 5x USB type A, 2x 3.5mm audio jack sockets, 1x 3.5mm SPDIF socket Ethernet: 1 RJ45 2x SFP+ cages (MM or SM Fiber support)	1 x DVI-D (5100's) 2 x DVID (5200's and 6200's) 4 x USB type A 2x 3.5mm audio jack sockets, 1x 3.5mm SPDIF socket Ethernet: 2 x RJ45 1 x SFP cage (MM/SM Fiber or Copper)
USB	4 ports of USB2.0 with USB True Emulation to support keyboard, mouse and touch. USB device seen as: 7 or 13 port hub	Supports USB 2.0 devices (low, full and high speed). Isochronous devices are not supported (e.g. USB audio or video devices) natively. The USB6000 device can be added for Isochronous device.
Max Video Resolution	Supports 4K UHD or DCI and refresh rates to 60Hz 4K video over single 10Gb fiber.	5000 series: 1920x1200 @60 Hz. 6000 series: up to 2560x1600 @ 60 Hz.
Audio	Analog Line in/out 2 channel 16bit 48KHz 1V RMS in / 1V RMS out	Analog Line in/out 2 channel 16bit 48KHz 1V RMS in / 1V RMS out
Ethernet	10GbE (No 10/100/1000 support)	1 GB Ethernet for Matrix switching access 10/100 Ethernet for Setup/Administration
Approvals/Compliance	CE FCC, UL, TAA	CE, FCC, UL, TAA



Avocent HMX 5200T



Avocent HMX 6200R



Avocent HMX 5150 Dongle

Vertiv.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2020 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.