

# Vertiv<sup>™</sup> Liebert®

## ITA2 UPS

5-30 kVA

Compact, Efficient, & Robust UPS for Critical Applications



In today's dynamic world, having basic power protection is not enough for enterprises. Business continuity is even more vital with digital trends constantly emerging and transforming the way you do business. In your critical system, you simply cannot afford downtime or waste time recovering these systems after a disruption. What you need is a robust, high-speed, reliable UPS system which offers perennial, round-the-clock protection for diverse applications.

#### Liebert® ITA2 5-30 kVA



5-10 kVA



16-30 kVA

#### **Our Solution**

The Vertiv™ Liebert® ITA2 is a fully-digital, highly reliable, double-conversion UPS solution that provides clean and consistent power. This highly efficient solution is ideal for various deployments, including IT racks, network closets, automation control systems, and precision instruments to small sized control rooms among other edge applications.

- Cutting–edge design enables seamless integration into various ecosystems
- Tailored for global deployment in a low carbon, compact footprint

The ultimate level of engineering and dynamics that have gone beyond the development of this innovative, next-generation product facilitate top-notch availability and excellent performance at low ownership costs, giving you ultimate peace of mind.

#### **Application Areas**

- Edge Networks
- Data Centers
- Automation industries
- Server Farms
- Workstations
- Telecom

# Liebert® ITA2 Robust power protection solution in a compact package
























## **Key Features**

- Robust structure with cutting edge channelized airflow design
- Wide input voltage range, making it immune to grid interference
- Rack-tower design for installation flexibility
- Able to deliver both three-phase and singlephase output<sup>2</sup>
- 0.99 input power factor for better grid or generator compatibility
- Powerful charging capability for minimum battery recharging time
- Programmable output outlets/terminals with cascade protection to protect key devices during heavy load<sup>2</sup>
- Integrated communication port for remote monitoring
- Easy to install, repair, and maintain
- Compliance with seismic conduction and vehicle carrying test
- Gravity sense LCD display
- Turnkey dust-resistant design with ability to operate under high ambient temperature of up to 50°C

#### The Most Efficient UPS

Vertiv™ Liebert® ITA2 offers best-in-class efficiency of up to 96.5% in double conversion mode over a wide range of load conditions, resulting in significant OPEX cost savings. Liebert ITA2's integrated Smart Sleep technology in ECO mode provides a superlative efficiency of up to 99%.

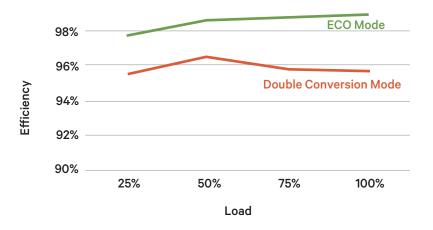

#### The Most Flexible UPS






\*Shown here the UPS and battery cabinets in a tower arrangement.

- Optimized modules minimizes the amount of used space in the rack
- Support base makes it convenient and stable to place on a floor
- · Adjustable display panel ensures readability and ease of use
- Configuration easily extends to batteries and POD cabinet

## **The Most Compact UPS**

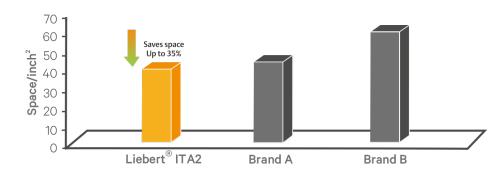



Available in different wattage variations, Vertiv™ Liebert® ITA2 is ideal in the edge of networks, light industrial applications and data centers, easily blending into any virtualized environment and providing comprehensive power protection at reduced operating costs.

#### Reliability in a compact footprint

- Fully-digital control with high output voltage precision
- Manages all the nine power problems including sagging, spikes, and fluctuations
- Built-in intelligent communication card for remote monitoring and management
- Built-in-power charger for fast charging reduces the battery charging time
- Prolonged backup time through cascaded connection
- Quality-tested for 1000 hours for extreme durability and tolerance even in stringent conditions

#### **High Availability**

#### Early Warning of UPS System Status

Multiple audible and visual alarms instantly alert for critical issues.

#### **Periodic Battery Testing**

Provides automatic and manual self-diagnostic battery testing for peace of mind.

#### **Power-Factor Correction**

Prevents noise, harmonics, and distortion from being transferred to connected loads or fed back to the utility.


#### **Lightning and Surge Protection**

The transient voltage surge suppression circuitry inside the Liebert® ITA2 provides additional protection for the connected equipment.

#### Wide Input Voltage Window

Prolongs battery life by allowing the UPS to maximize the use of utility power before being transferred to the battery when the input voltage exceeds the specified limits.



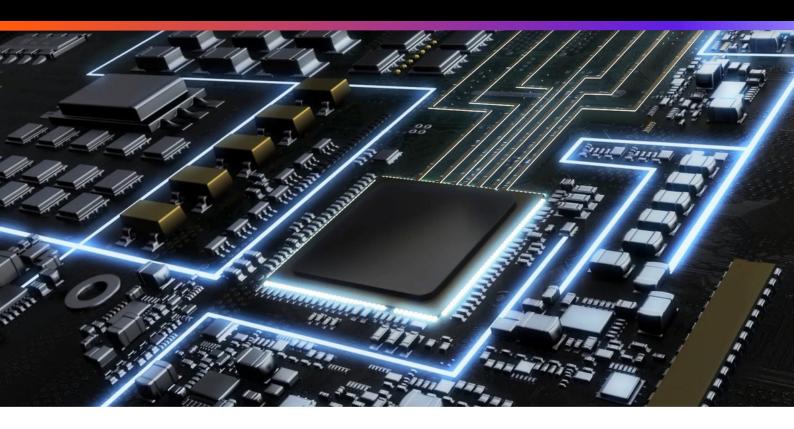

#### **Intelligent Communications**

The Vertiv<sup>™</sup> Liebert® ITA2 offers an intuitive control panel, network connectivity communications card, and optional software monitoring, all designed to ensure visibility, control and peace of mind for manned or unmanned locations. You can even monitor key environmental and room conditions.

#### **Vertiv™ Power Insight**

Vertiv<sup>™</sup> Power Insight is an application that can monitor your Liebert UPS systems and provide real-time trends for critical UPS performance management. In the event of a need to shutdown the UPS, the software ensures a graceful shutdown routine so that no damage occurs to the data or systems.




#### **POD - Optional Accessories**

The Liebert POD maintenance bypass and output distribution unit ensures continuous uptime when your critical system cannot afford any power loss without power, even for scheduled UPS maintenance.

It allows you to manually transfer connected equipment to utility power via a maintenance bypass switch, permitting scheduled service or UPS replacement without shutting down connected equipment. Features include:

- 2U height minimizes rack space requirements
- Easy plug-and-play installation

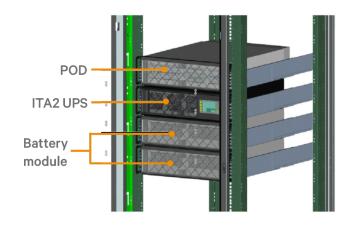

## **Battery Backup Table**

Batter	y Backu	p Table	9										
UPS	Battery				Ba	ckup Tim	e in Minut	es					
Model	Modules	5kVA	4.5kVA	4kVA	3.5kVA	3kVA	2.5kVA	2kVA	1.5kVA	1kVA	0.5kVA		
5kVA	1	6.8	7.8	9.2	11.2	13.9	17.9	24.3	35.6	58	122.4		
	2	18	20.9	24.6	29.7	36.5	46	59.7	81.7	126.4	278.8		
	3	31.9	36.6	42.6	50.2	60.2	74.1	94.5	128.3	207	435.7		
	4	46.3	52.6	60.3	70.2	83.5	102.2	130.3	182.7	287.6	592.5		
	5	60.4	68.1	77.8	90.3	107	131.4	171.6	237.1	368.2	749.3		
	6	74.4	83.7	95.4	110.4	131.5	164.6	212.9	291.5	448.8	906.1		
UPS	Battery				Ba	ckup Tim	e in Minut	es					
Model	Modules	6kVA	5.4kVA	4.8kVA	4.2kVA	3.6kVA	3kVA	2.4kVA	1.8kVA	1.2kVA	0.6kVA		
	1	5.1	6.1	7.1	8.6	10.8	13.9	19	28	46.9	101		
	2	14	16.1	19.1	23	28.6	36.5	48.4	67	103.9	228.2		
CL) (A	3	24.7	28.7	33.6	40	48.5	60.2	77.6	105.6	167.6	359.7		
6kVA	4	36.7	42	48.7	57	68	83.5	106.9	147.8	235.1	491.2		
	5	48.8	55.3	63.3	73.6	87.5	107	138.3	193.5	302.6	622.8		
	6	60.5	68.2	77.9	90.4	107.1	131.5	172.9	239.1	370.1	754.3		
UPS	Battery				Ba	ckup Tim	e in Minut	es					
Model	Modules	10kVA	9kVA	8kVA	7kVA	6kVA	5kVA	4kVA	3kVA	2kVA	1kVA		
	2	4.8	5.5	7.4	10.2	14	18	24.6	36.5	59.7	126.4		
	3	8.8	10.2	13.6	18.5	24.7	31.9	42.6	60.2	94.5	207		
10kVA	4	13.7	15.9	21.1	28.4	36.7	46.3	60.3	83.5	130.3	287.6		
	5	19.4	22.4	29.7	39.3	48.8	60.4	77.8	107	171.6	368.2		
	6	25.8	29.6	38.6	50.6	60.5	74.4	95.4	131.5	212.9	448.8		
UPS	Battery				Ba	ckup Tim	e in Minut	es					
Model	Modules	16kVA	14.4kVA	12.8kVA	11.2kVA	9.6kVA	8kVA	6.4kVA	4.8kVA	3.2kVA	1.6kVA		
	4	9.5	11	13	15.6	19.4	24.8	33.8	48.7	77.7	169.6		
16kVA	6	16.8	19.6	23.1	27.8	34	42.9	56.2	77.9	121.7	271.9		
	8	25.3	29.3	34.4	40.8	49.2	60.7	78.1	107.3	173.2	374.1		
	10	34.4	39.5	45.9	53.8	63.9	78.4	100.3	138.9	225.2	476.3		
	12	43.6	49.7	57.2	66.5	78.7	96.1	122.4	173.7	277.2	578.6		
UPS	Battery Backup Time in Minutes												
Model	Modules	20kVA	18kVA	16kVA	14kVA	12kVA	10kVA	8kVA	6kVA	4kVA	2kVA		
	4	6.9	8	9.5	11.5	14.3	18.3	24.8	36.7	60.3	130.3		
	6	12.3	14.3	16.8	20.4	25.3	32.3	42.9	60.5	95.4	212.9		
20kVA	8	18.5	21.5	25.3	30.5	37.5	46.8	60.7	84	131.8	295.5		
	10	25.3	29.3	34.4	41	49.7	61.1	78.4	107.6	173.4	378.1		

Note: Battery autonomy times and 5 year design life are based on operation at 25°C. Approximate autonomy times are based on fully charged batteries and can vary +/-5% due to battery manufacturing variances.

51.4

61.6

75.2

96.1

132.3

215.1

460.7

12

32.6

37.5

43.6



# **Technical Specifications**

Nominal Ratings (kVA)	5	6	10	16	20	30				
Long Backup Model	ITA-05k00AL1102P00	ITA-06k00AL1102P00	ITA-10k00ALA102P00	ITA-16k00AL3A02P00	ITA-20k00AL3A02P00	ITA-30k00AL3302P00				
Part Number	01202670	01202671	01202672	01202682	01202683	01202660				
Input Parameters										
Nominal Input Voltage (V)	220/230/240VA0	C 1-Phase, 2 Wire	220/230/240VAC 1-Phase, 2 Wire 380/400/415VAC 3-Phase, 4 Wire	380/400/415VAC 3-Pha		se, 4 Wire				
Input Voltage Range (V)		176-288VAC a	nt full load; 100-176VAC	at linear derating; 100V	AC at half load					
Nominal Input Frequency (Hz)										
nput Frequency Range (Hz) 40-70										
Input Power Factor (kW/kVA)*		0.99								
Current THD at full linear load (THDi%)*										
Battery										
Battery Blocks Per String		12*, 15, 16, 17, 18, 19, 20		24*, 30, 32, 3	32, 34, 36, 38, 40					
Battery Charger Max. Power (A)	= {	5A	= 8A		= 13A					
Battery Option	P/C: ITA-BCI0020K01 (built-in battery module of 16 block X 12V X 9AH)  Only external battery cabinet Dimensions in rack arrangement - 430(W) x 739(D) x 85(H)  battery cabinet									
Output										
Nominal Output Voltage (V)	:	220/230/240 (1-phase)	)		/AC (1-Phase), /AC (3-Phase)	380/400/415VAC (3-Phase)				
Nominal Output Frequency (Hz)			50	/60						
Rated Power Factor (kW/kVA)	Unity									
Voltage Harmonic Distortion (%)	<2% for Linear loads & <5% for Non-linear loads									
Overload Capacity	At 25°C: 105% ~ 125%, 5min; 125% ~ 150%, 1min; 150%, 200ms									
Crest Factor			3	3:1						
Efficiency										
Online Mode Efficiency	Up to	95.5%	Up to 95.8%	Up to	96.2%	Up to 96.5%				
ECO Mode Efficiency		Up to 99%								
Dimensions and Weight										
Dimensions (W x D x H) in mm- Rack Mounted Arrangement	430x4	430x450x85			430x570x130					
Weight (kg)	1	1	15	2	23	23.5				
General										
Nosie at 1 m (dBA)		=55		=	58	<60				
Operating Temperature (°C)		O~50*								
Relative Humidity (%RH)		5 ~ 95, non-condensing								
Altitude (m)			=30	00m						
General and safety requirements for UPS			IEC/EN	62040-1						
EMC requirements for UPS			IEC/EN	62040-2						
UPS classification according to IEC 62040-3			VFI-S	SS-111						

Note: Specification are subject to change without any further notification

(1) with ABS certification (2) Not Available in 30kVA

<sup>\*</sup>Dearting conditions apply



#### Vertiv.com | Asia